


Fairchild Fasteners



Santa Ana Operations

Delron Inserts for honeycomb & sandwich panels



For Honeycomb and Sandwich Panels

Decades ago Deiron™ Inserts began giving honeycomb and sandwich panels real functionality by providing engineers with a method of attachment. Since then Deiron Inserts have spawned a score of imitators, but none offer the variety presented here, nor the meticulous attention to quality design and manufacture on which Rosán has built its reputation.

In addition to introducing you to the primary series of Deiron Inserts, and explaining the function, design criteria, installation procedure and tooling for each, this catalog also provides the detailed engineering and selection data needed to specify the particular part number required for your application.




Rosán's Deiron Insert Series offers you the widest available choice of types, styles, materials and finishes for sandwich panel fastening. This catalog depicts only a portion of honeycomb and sandwich panel fasteners that have been developed over the years. In addition, Rosán is geared to provide custom solutions to all types of special fastener problems. If you don't see a design in this catalog that will suit your application, consult Rosán or one of our field sales engineers for a solution to meet your specific needs.


Capabilities

Deiron Inserts provide the capability to attach sub-assemblies to sandwich structures. They transmit loads to and from the structure (see below).


Shear

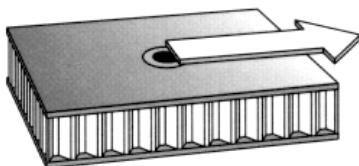

Tension



Torque

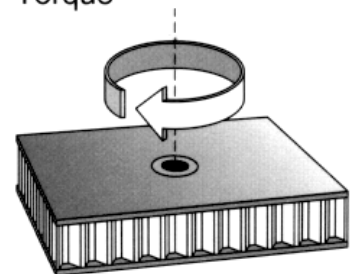

Contents

	Page
Honeycomb and Sandwich Panel Information	3-5
Delron Series Selector Guide	6-7
100 Series	
101 Series Thru-Rivet	8-9
102 Series Thru-Bolt	10-11
103 Series Threaded	12-13
103 Series Thin Panel Threaded	14-15
104 Series Threaded with Non-Metallic Lock	16-17
104 Series Thin Panel Threaded with Non-Metallic Lock	18-19
106 Series Threaded with Self-Locking Helical Coil Insert	20-21
106 Series Thin Panel Threaded with Self-Locking Helical Coil Insert	22-23
100 Series Installation and Tooling	24-25
400 Series	
400 SF Series Snap-in, Floating Nut	26-27
400 H, HE Series Blind Thread	28-29
400 HF Series Floating Nut	30-31
400 S, SE Series Snap-In	32-33
400 Series Installation and Tooling	45
D1800 Series-NAS Equivalentents	
D1832 Series NAS 1832 Equivalent	34-35
D1833 Series NAS 1833 Equivalent	36-37
D1934 Series NAS 1834 Equivalent	38-39
D1835 Series NAS 1835 Equivalent	40-41
D1836 Series NAS 1836 Equivalent	42-43
D1837 Series NAS 1837 Equivalent	44
D1800 Series/NAS Equivalentent Installation and Tooling	45
600 Series	
601 Series Thru-Rivet	46-47
602 Series Thru-Bolt	48-49
603 Series Threaded	50-51
604 Series Threaded with Non-Metallic Lock	52-53
606 Series Threaded with Self-Locking Helical Coil Insert	54-55
600 Series Installation and Tooling	56-57
601 Series Flared Threaded Thru-Rivet	58-59
602 Series Flared Threaded Thru-Bolt	60-61
603 Series Flared Threaded	62-63
604 Series Flared Threaded with Non-Metallic Lock	64-65
606 Series Flared Threaded with Self-Locking Helical Coil Insert	66-67
600 Series Flared Installation and Tooling	68-69
Specials	
A106 Series Thru-Bolt/Thru-Rivet	70-71
D147HF Series Floating Nut with Self-Locking, Blind Thread	72-73
D137HF Series Thin Panel Flush Head with Floating Nut	74
Optional Packaging for Potted-In Inserts	Inside back cover

Honeycomb and Sandwich Panels



A structural sandwich consists of 3 elements, the core, the facing (skins or cover sheets) and most important, the bond. Sandwich panels, therefore, can be made from practically any material available. The most common examples are listed below.

Face Sheet Materials:

- Aluminum
- Steel
- Titanium
- Plastic
- Fiberglass - Fiberglass Reinforced Plastic (FRP)
- Composite - Graphite/Boron/Fibers
- Wood Veneer
- Plywood

Core Materials:

- Honeycomb
 - Aluminum
 - CRES Steel
 - Titanium
 - Nomex^(r)
 - Kraft Paper
 - FRP with various resins
- Closed Cell Foam - Polyvinyl Chloride (PVC)
- End Grain Balsa Wood
- Wood

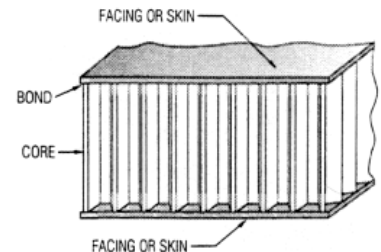


The highest strength-to-weight ratio is produced in honeycomb sandwich panel, where the core is 90% to 99% open space.

The core both supports and links the top and bottom facings of the panel. Because the components are bonded together, compression on one facing produces tension on the other facing. The sandwich construction supports loads by taking the bending moment in the facing sheets and the shear load in the core.

Sub-Panel Structure Comparison

The comparison below shows the relative strength and weight attributes of the most common types of sandwich panels.

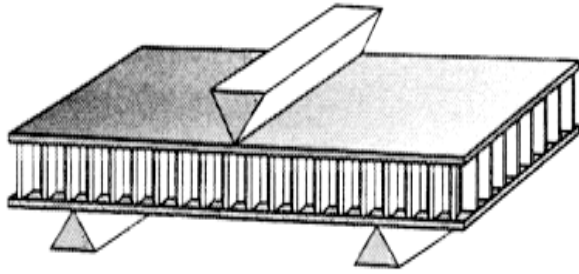

	Relative Strength	Relative Stiffness	Relative Weight
Honeycomb	100%	100%	3%
Foam Sandwich	26%	68%	
Structural Extrusion	62%	99%	
Sheet & Stringer	64%	86%	
Plywood	3%	17%	100%


Typical Panel Description

T = Overall Thickness (O.A. is also used)

T_t1 = Thickness of Top Face Sheet

T_t2 = Thickness of Bottom Face Sheet

C = Complete Description of Core

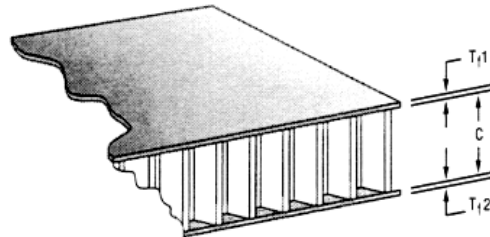

Example:

T = .560"

T_t1 = .020" Aluminum 6061-T6

T_t2 = .020" Aluminum 6061-T6


C (Core) = .518"; 3.2 lbs. Density; 3/16 Hex; .0015" Foil, 5052 Aluminum

Note: T (Overall Thickness) is important to note, and does not always equal the core height plus facing thickness; the thickness of the bonding material must be considered.


Series Selector Guide

Delron Series	Description	Capabilities	Styles	Installation
100	Traditional "two-piece" grommet type inserts with "interference interlock". For use as attachment points in honeycomb or sandwich panels. Requires access to both sides of the panel.	Shear and compression loading. Minimum tension capabilities.	Flush or Non-Flush Head Styles: <ul style="list-style-type: none"> · Thru-Rivet · Thru-Bolt · Threaded · Threaded with Non-Metallic Thread Lock · Threaded with Helical Coil 	<ul style="list-style-type: none"> · One Diameter Thru-Hole · Flat Pressing Anvils with Alignment Ram Type Equipment, or · Arbor Press, or · Hydraulic Press, or · Squeezer Equipment
400	Structural capability insert potted or molded into place, requires access to one side of the panel only.	High pull-out strength. Positive sealing.	<ul style="list-style-type: none"> · Threaded · Floating Thread · Threaded with Non-Metallic Thread Lock · Threaded with All Metal Thread Lock 	<ul style="list-style-type: none"> · One Diameter Blind Hole · Molded in with Semco or Similar Equipment · Tab Installation · Snap-In Installation · Adjustable
600 Regular	Structural capability insert. Pre-assembled two-piece design allows for high installation rates and lower installed costs. Requires access to both sides of the panel.	Excellent shear, tension, compression and torque-out capabilities.	Flush or No-Flush Head Styles: <ul style="list-style-type: none"> · Thru-Rivet · Thru-Bolt · Threaded · Threaded with Non-Metallic Thread Lock · Threaded with Helical Coil 	<ul style="list-style-type: none"> · Two Diameter Hole (Drill and Counterbore) · Flat Pressing Anvils with Alignment Ram Type Equipment, or · Arbor Press, or · Hydraulic Press, or · Squeezer Equipment
600 Flared	Structural capability insert. Pre-assembled, two-piece design allows for high installation rates and lower installed costs. Requires access to both sides of the panel.	Excellent shear, tension, compression and torque-out capabilities. High fatigue resistance.	Flush or Non-Flush Head Styles: <ul style="list-style-type: none"> · Thru-Rivet · Thru Bolt · Threaded · Threaded with Non-Metallic Thread Lock · Threaded with Helical Coil 	<ul style="list-style-type: none"> · Two Diameter Hole (Drill and Counterbore) · Flat Pressing Anvils with Alignment Ram Type Equipment, or · Arbor Press, or · Hydraulic Press, or · Squeezer Equipment


Typical Assemblies




101 & 102 Rivet & Thru-Bolt Series




103 Threaded Series




104 Self-Locking Series




106 All Metal Self-Locking Series



400 H HE Flush Head Series




400 S SE Snap-In Series




400 HF Floating Series


**NAS 1832 through
NAS 1836 are Available**




603 & 604 Threaded Series



601 & 602 Rivets Thru-Bolt Series



603 Flared Threaded Series



601 & 602 Flared Rivet & Thru-Bolt Series

Delron Inserts 101 Series – Thru-Rivet

Style Selection

Head styles may be combined between Plugs and Sleeves within the same size.

Head Style	D – Flush	F – Non-Flush	C – Flush, Countersink Hole
Plug			
Sleeve			

*See Tables 2

Table 1

Size	Hole Dia.	B Body Dia.	C Head Dia.	D C'Sink Dia.	Head Angle
12	.136	.278	.500	.233	13°
15	.169	.278	.500	.295	13°
18	.194	.309	.625	.362	13°
25	.257	.372	.750	.486	14°
28	.290	.403	.812	.501	14°
31	.318	.466	.875	.574	14°

Notes:

- <1> Head Thickness = .033 for 31 size.
- <2> "C" style head available in Plugs only.
- <3> "J" diameter is thru (no counterbore) for -03 through -04 length Sleeves for 25 and 28 sizes only.
- 4. - Tolerances, unless otherwise specified: .xxx ± .010; Angles ±2°.

Part Number Selection


Two part number-Sleeve and Plug-are required for a complete assembly. Consult Rosán for availability of optional materials, finishes, sizes and lengths.

Example:

S 1 0 1 F 15 - 08
P 1 0 1 C 15 - 1

- ▬ Add Suffix "NF" to Part Number if No Finish is Required
- ▬ Length Dash Number: See Tables 2
- ▬ Optional Finish (Alum. Parts Only): AL = Alodine per MIL-C-5541, Class 3
AA = Iridite per MIL-C-5541
- ▬ Size: See Table 1
- ▬ Head Style: C = Flush Head, Countersink Hole
D = Flush Head
F = Non-Flush Head
- ▬ Type: Thru-Rivet
- ▬ Material: 0 = 2024-T4 or T351 Aluminum Alloy per QQ-A-225/6, Anodize per MIL-A-8625
6 = CRES Steel per ASTM-A-581/ASTM-A-582, AMS5640, Passivate per QQ-P-35
9 = Carbon Steel per ASTM-A-108/FED-STD-66, Cadmium Plate per QQ-P-416, Type II, Class 2
- ▬ Series 100: Grommet Type Panel Insert
- ▬ Part Type: P = Plug S = Sleeve

Typical Assembly

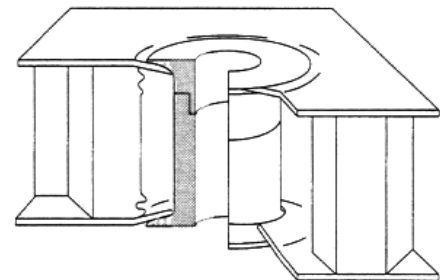

Typical Series 101, Thru-Rivet Plug and Sleeve assembly, installed in honeycomb sandwich panel. Sleeve and Plug form a telescopic press fit.

Note: For installation and tooling information, see pages 24 and 25.

101 Series - continued

Plug and Sleeve Dash Number Selection

Select Sleeve and Plug Dash Number from Tables 2 by determining the thickness closest to, but not greater than, the panel being used. Longer lengths available using factory installed sleeve extensions.

 = Panel Thickness

Examples: 1. Requirements: #15 Size Thru-Rivet, Aluminum Alloy,
Non-Flush Head for a .375 overall panel.
From table select:
-0 Plug = P101F15-0
-06 Sleeve = S101F15-06

2. Requirements: #15 Size Countersink Hole, CRES Steel,
Flush Head for a .400 overall panel.
From table select:
-01 Plug = P161C15-01
-06 Sleeve = S161D15-06

Tables 2
12, 15 and 18 Sizes

Plug Dash Number			-X	-0	-01	-1	-11	-2	-21	-3	-31
Sleeve Dash Number	H	G	.085	.085	.100	.116	.131	.147	.162	.179	.194
-03	.103		.188	—	—	—	—	—	—	—	—
-04	.165		—	.250	.265	.281	.296	.312	.327	.344	.359
-06	.290		—	.375	.390	.406	.421	.437	.452	.469	.485
-08	.415		—	.500	.515	.531	.546	.562	.577	.594	.609
-10	.540		—	.625	.640	.656	.671	.687	.702	.719	.734
-12	.665		—	.750	.765	.781	.796	.812	.827	.844	.859
-14	.790		—	.875	.890	.906	.921	.937	.952	.969	.984
-16	.915		—	1.000	1.015	1.031	1.046	1.062	1.077	1.094	1.109
-18	1.040		—	1.125	1.140	1.156	1.171	1.187	1.202	1.219	1.234

25 and 28 Sizes

Plug Dash Number			-X	-0	-01	-1	-11	-2	-21	-3	-31
Sleeve Dash Number	H	G	.120	.120	.135	.151	.167	.183	.198	.214	.230
-03*	.067		.187	—	—	—	—	—	—	—	—
-04*	.130		—	.250	.265	.281	.297	.313	.328	.344	.360
-06	.255		—	.375	.390	.406	.422	.438	.453	.469	.485
-08	.380		—	.500	.515	.531	.547	.563	.578	.594	.610
-10	.505		—	.625	.640	.656	.672	.688	.703	.719	.735
-12	.630		—	.750	.765	.781	.797	.813	.828	.844	.860
-14	.755		—	.875	.890	.906	.922	.938	.953	.969	.985
-16	.880		—	1.000	1.015	1.031	1.047	1.063	1.078	1.094	1.110
-18	1.005		—	1.125	1.140	1.156	1.172	1.188	1.203	1.219	1.235

*"J" diameter is thru (no counterbore) for these lengths.

31 Size


Plug Dash Number			-0	-01	-1	-11	-2	-21	-3	-31
Sleeve Dash Number	H	G	.190	.206	.221	.237	.252	.268	.283	.299
-06	.185		.375	.391	.406	.422	.437	.453	.468	.484
-08	.310		.500	.516	.531	.547	.562	.578	.593	.609
-10	.435		.625	.640	.656	.672	.687	.703	.718	.734
-12	.560		.750	.766	.781	.797	.812	.828	.843	.859
-14	.685		.875	.891	.906	.922	.937	.953	.968	.984
-16	.810		1.000	1.016	1.031	1.047	1.062	1.078	1.093	1.109
-18	.935		1.125	1.141	1.156	1.172	1.187	1.203	1.218	1.234

Delron Inserts

102 Series – Thru-Bolt

Style Selection

Head styles may be combined between Plugs and Sleeves within the same size.

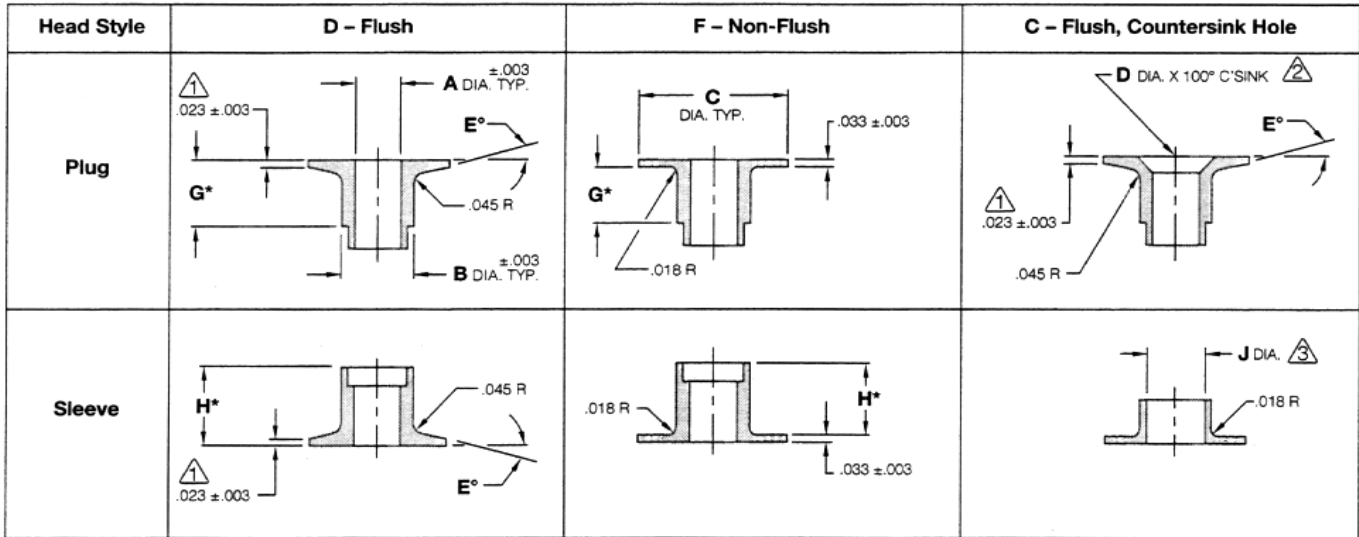

*See Tables 2

Table 1

Size	A Hole Dia.	B Body Dia.	C Head Dia.	D C'Sink Dia.	E° Head Angle
4	.116	.216	.375	.220	13°
6	.144	.278	.500	.274	13°
8	.169	.278	.500	.332	13°
10	.194	.309	.325	.382	13°
25	.257	.372	.750	.505	14°
31	.318	.466	.875	.632	14°

Notes:


- <1> Head Thickness = .033 for 31 size.
- <2> "C" style head available in Plugs only.
- <3> "J" diameter is thru (no counterbore) for -03 through -04 length Sleeves for 25 sizes only.
- 4. Tolerances, unless otherwise specified: .xxx ± .010; Angles ±2°.

Part Number Selection


Two part number-Sleeve and Plug-are required for a complete assembly. Consult Rosán for availability of optional materials, finishes, sizes and lengths.

Example:

S 1 0 2 F 10 -08
P 1 0 2 C 10 - 1

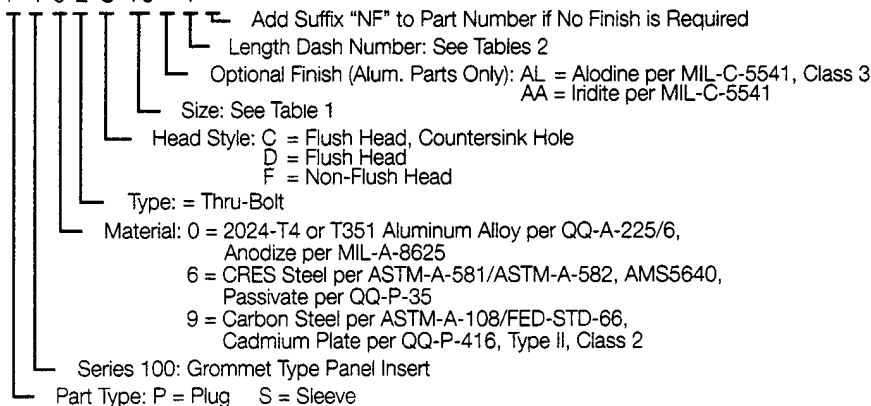

Typical Assembly

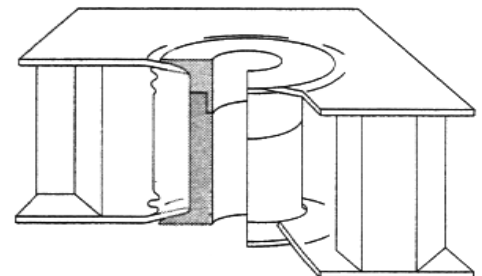

Typical Series 102, Thru-Bolt Plug and Sleeve assembly, installed in honeycomb sandwich panel. Sleeve and Plug form a telescopic press fit.

Note: For installation and tooling information, see pages 24 and 25.

102 Series - continued

Plug and Sleeve Dash Number Selection

Select Sleeve and Plug Dash Number from Tables 2 by determining the thickness closest to, but not greater than, the panel being used. Longer lengths available using factory installed sleeve extensions.

= Panel Thickness

Examples: 1. Requirements: #10 Size Thru-Bolt, Aluminum Alloy,
Non-Flush Head for a .375 overall panel.
From table select:
-0 Plug = P102F10-0
-06 Sleeve = S102F10-06

2. Requirements: #10 Size Countersink Hole, CRES Steel,
Flush Head for a .400 overall panel.
From table select:
-01 Plug = P162C10-01
-06 Sleeve = S162D10-06

Tables 2
4, 6, and 8 Sizes

Plug Dash Number		-X	-0	-01	-1	-11	-2	-21	-3	-31
Sleeve Dash Number	H G	.085	.085	.100	.116	.131	.147	.162	.179	.194
-03	.103	.188	—	—	—	—	—	—	—	—
-04	.165	—	.250	.265	.281	.296	.312	.327	.344	.359
-06	.290	—	.375	.390	.406	.421	.437	.452	.469	.485
-08	.415	—	.500	.515	.531	.546	.562	.577	.594	.609
-10	.540	—	.625	.640	.656	.671	.687	.702	.719	.734
-12	.665	—	.750	.765	.781	.796	.812	.827	.844	.859
-14	.790	—	.875	.890	.906	.921	.937	.952	.969	.984
-16	.915	—	1.000	1.015	1.031	1.046	1.062	1.077	1.094	1.109
-18	1.040	—	1.125	1.140	1.156	1.171	1.187	1.202	1.219	1.234

25 Size

Plug Dash Number		-X	-0	-01	-1	-11	-2	-21	-3	-31
Sleeve Dash Number	H G	.120	.120	.135	.151	.167	.183	.198	.214	.230
-03*	.067	.187	—	—	—	—	—	—	—	—
-04*	.130	—	.250	.265	.281	.297	.313	.328	.344	.360
-06	.255	—	.375	.390	.406	.422	.438	.453	.469	.485
-08	.380	—	.500	.515	.531	.547	.563	.578	.594	.610
-10	.505	—	.625	.640	.656	.672	.688	.703	.719	.735
-12	.630	—	.750	.765	.781	.797	.813	.828	.844	.860
-14	.755	—	.875	.890	.906	.922	.938	.953	.969	.985
-16	.880	—	1.000	1.015	1.031	1.047	1.063	1.078	1.094	1.110
-18	1.005	—	1.125	1.140	1.156	1.172	1.188	1.203	1.219	1.235

**"J" diameter is thru (no counterbore) for these lengths.

31 Size


Plug Dash Number		-0	-01	-1	-11	-2	-21	-3	-31
Sleeve Dash Number	H G	.190	.206	.221	.237	.252	.268	.283	.299
-06	.185	.375	.391	.406	.422	.437	.453	.468	.484
-08	.310	.500	.515	.531	.547	.562	.578	.593	.609
-10	.435	.625	.640	.656	.672	.687	.703	.718	.734
-12	.560	.750	.766	.781	.797	.812	.828	.843	.859
-14	.685	.875	.891	.906	.922	.937	.953	.968	.984
-16	.810	1.000	1.016	1.031	1.047	1.062	1.078	1.093	1.109
-18	.935	1.125	1.141	1.156	1.172	1.187	1.203	1.218	1.234

Delron Inserts

103 Series – Threaded

Style Selection

Head styles may be combined between Plugs and Sleeves within the same size.

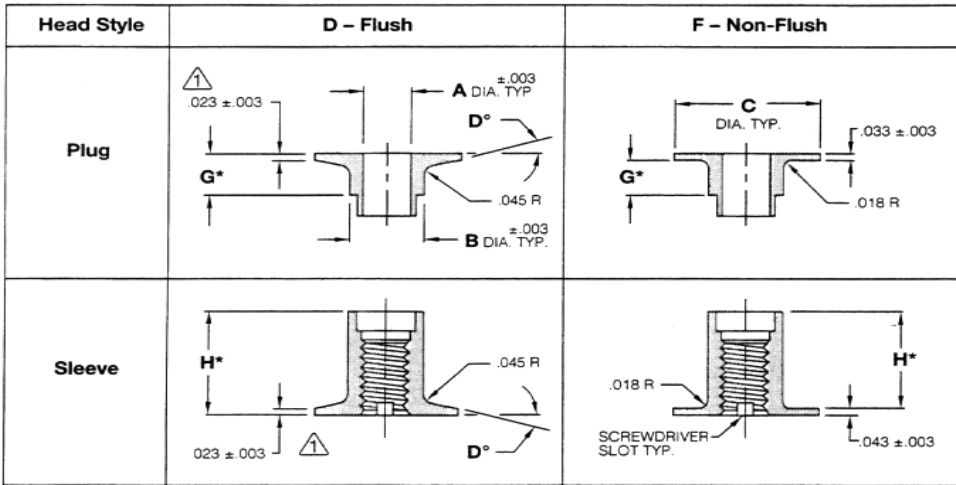

Notes:

- <1> Head Thickness = .033 on 524 size Sleeves and 31 size Plugs.
- 2. Tolerances, unless otherwise specified: .xxx ± .010; Angles ±2°.

*See Tables 2

Table 1


Size		Thread Per MIL-S-8879	A Hole Dia.	B Body Dia.	C Head Dia.	D° Head Angle
Sleeve	Plug					
440	4	.1120-40 UNJC-3B	.116	.216	.375	13°
632	6	.1380-32 UNJC-3B	.144	.278	.500	13°
832	8	.1640-32 UNJC-3B	.169	.278	.500	13°
1032	10	.1900-32 UNJF-3B	.194	.309	.625	13°
428	25	.2500-28 UNJF-3B	.257	.372	.750	14°
524	31	.3125-24 UNJF-3B	.318	.466	.875	14°

Part Number Selection


Two part number-Sleeve and Plug-are required for a complete assembly. Consult Rosán for availability of optional materials, finishes, sizes and lengths.

Example:

S 1 0 3 F 428 -08
P 1 0 3 D 25 -0

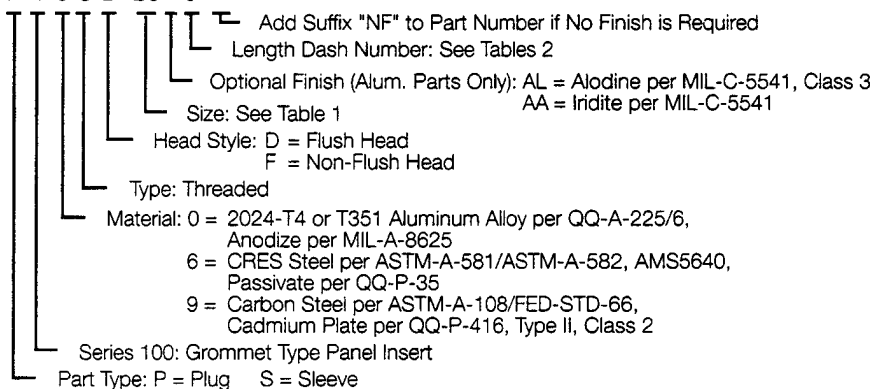

Typical Assembly

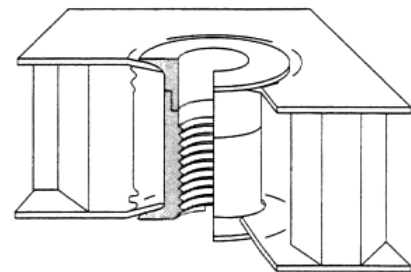

Typical Series 103, Threaded Plug and Sleeve assembly, installed in honeycomb sandwich panel. Sleeve and Plug form a telescopic press fit.

Note: For installation and tooling information, see pages 24 and 25.

103 Series - continued

Plug and Sleeve Dash Number Selection

Select Sleeve and Plug Dash Number from Tables 2 by determining the thickness closest to, but not greater than, the panel being used. Longer lengths available using factory installed sleeve extensions. For panel thicknesses less than the minimums listed below, see 103 series, Thin Panel versions.

= Panel Thickness

Examples: 1. Requirements: 1032 Thread size, CRES Steel,
Flush Head for a .500 overall panel.
From table select:
-0 Plug = P163D10-0
-06 Sleeve = S163D1032-08

2. Requirements: 428 Thread size, Aluminum Alloy
Non-Flush Head for a .625 overall panel.
From table select:
-0 Plug = P103F25-0
-10 Sleeve = S103F428-10

Tables 2
440, 632, 832, 1032 Sizes

Sleeve Dash Number	Plug Dash Number		-0	-01	-1	-11	-2	-21	-3	-31
	H	G								
-08	.415		.500	.515	.531	.546	.562	.577	.594	.609
-10	.540		.625	.640	.656	.671	.687	.702	.719	.734
-12	.665		.750	.765	.781	.796	.812	.827	.844	.859
-14	.790		.875	.890	.906	.921	.937	.952	.969	.984
-16	.915		1.000	1.015	1.031	1.046	1.062	1.077	1.094	1.109
-18	1.040		1.125	1.140	1.156	1.171	1.187	1.202	1.219	1.234

428 Size

Sleeve Dash Number	Plug Dash Number		-0	-01	-1	-11	-2	-21	-3	-31
	H	G								
-08	.380		.500	.515	.531	.547	.563	.578	.594	.610
-10	.505		.625	.640	.656	.672	.688	.703	.719	.735
-12	.630		.750	.765	.781	.797	.813	.828	.844	.860
-14	.755		.875	.890	.906	.922	.938	.953	.969	.985
-16	.880		1.000	1.015	1.031	1.047	1.063	1.078	1.094	1.110
-18	1.005		1.125	1.140	1.156	1.172	1.188	1.203	1.219	1.235

524 Size


Sleeve Dash Number	Plug Dash Number		-0	-01	-1	-11	-2	-21	-3	-31
	H	G								
-10	.435		.625	.640	.656	.672	.687	.703	.718	.734
-12	.560		.750	.766	.781	.797	.812	.828	.843	.859
-14	.685		.875	.891	.906	.922	.937	.953	.968	.984
-16	.810		1.000	1.016	1.031	1.047	1.062	1.078	1.093	1.109
-18	.935		1.125	1.141	1.156	1.172	1.187	1.203	1.218	1.234

Delron Inserts

103 Series – Thin Panel Threaded

Style Selection

Head styles may be combined between Plugs and Sleeves within the same size.

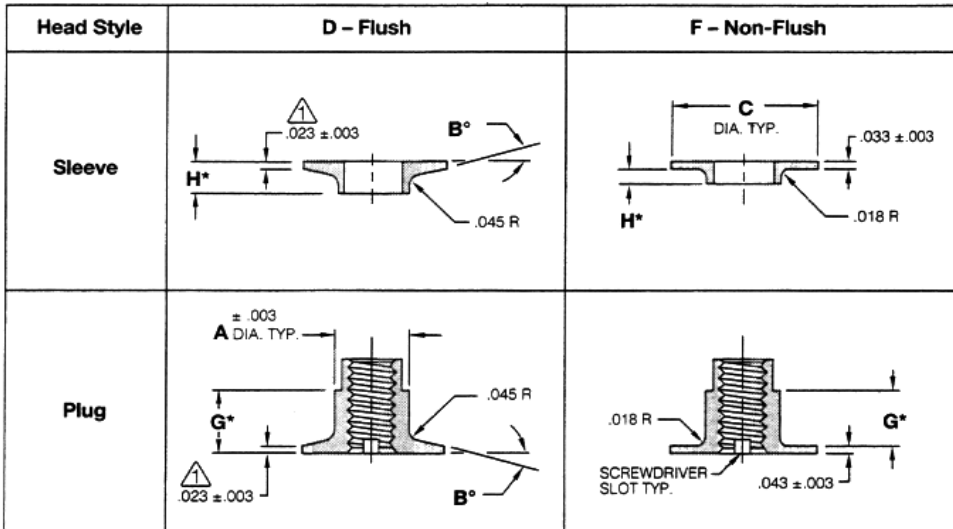

*See Tables 2

Notes:

- <1> Head Thickness = .033 on 524 size Plugs and 31 size Sleeves.
- 2. Tolerances, unless otherwise specified: .xxx ± .010; Angles ±2°.

Table 1


Size		Thread Per MIL-S-8879	A Body Dia.	B° Head Angle	C Head Dia
Sleeve	Plug				
4	440	.1120-40 UNJC-3B	.216	13°	.375
6	632	.1380-32 UNJC-3B	.278	13°	.500
8	832	.1640-32 UNJC-3B	.278	13°	.500
10	1032	.1900-32 UNJF-3B	.309	13°	.625
25	428	.2500-28 UNJF-3B	.372	14°	.750
31	524	3125-24 UNJF-3B	.466	14°	.875

Part Number Selection


Two part number-Sleeve and Plug-are required for a complete assembly. Consult Rosán for availability of optional materials, finishes, sizes and lengths.

Example:

P 1 0 3 F 832-06
S 1 0 3 D 8 - 0

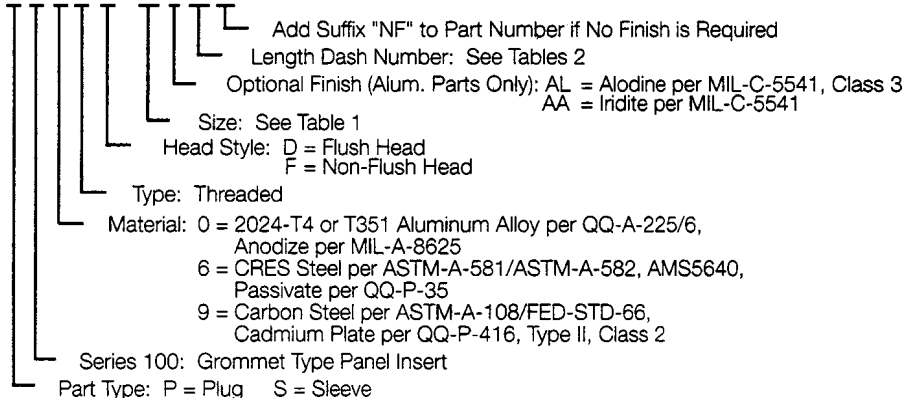

Typical Assembly

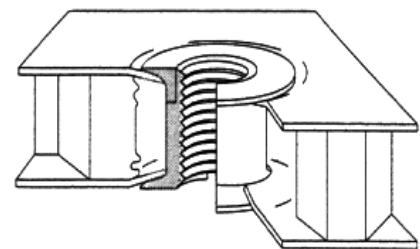


Typical Series 103, Thin Panel, Threaded Plug and Sleeve assembly, installed in honeycomb sandwich panel. Sleeve and Plug form a telescopic press fit.

Note: For installation and tooling information, see pages 24 and 25.

103 Thin Series - continued

Plug and Sleeve Dash Number Selection

Select Sleeve and Plug Dash Number from Tables 2 by determining the thickness closest to, but not greater than, the panel being used.

 = Panel Thickness

Examples: 1. Requirements: 1032 Thread size, CRES Steel,
Flush Head for a .280 overall panel.
From table select:
-04 Plug = P163D1032-04
-1 Sleeve = S163D10-1

2. Requirements: 428 Thread size, Aluminum Alloy
Non-Flush Head for a .390 overall panel.
From table select:
-06 Plug = P103F428-06
-0 Sleeve = S103F25-0

Tables 2
440, 632, 832, 1032 and 428 Sizes

Sleeve Dash Number \ Plug Dash Number		Sleeve Dash Number								
		- 0	-01	-1	-11	-2	-21	-3	-31	
Plug Dash Number	G	.094	.109	.125	.140	.156	.171	.187	.202	
	H	.151	.245	.261	.276	.292	.307	.323	.338	.354
-04		.281	.375	.391	.406	.422	.437	.453	.468	.484


524 Size

Sleeve Dash Number \ Plug Dash Number		Sleeve Dash Number								
		- 0	-01	-1	-11	-2	-21	-3	-31	
Plug Dash Number	G	.094	.109	.125	.140	.156	.171	.187	.202	
	H	.281	.375	.390	.406	.422	.437	.453	.468	.484
-06		.401	.500	.510	.526	.542	.557	.573	.588	.604
-08		.526	.625	.636	.651	.667	.682	.698	.713	.729
-10		.651	.745	.761	.776	.792	.807	.823	.838	.854

Delron Inserts 104 Series - Threaded with Non-Metallic Lock

Style Selection

Head styles may be combined between Plugs and Sleeves within the same size.

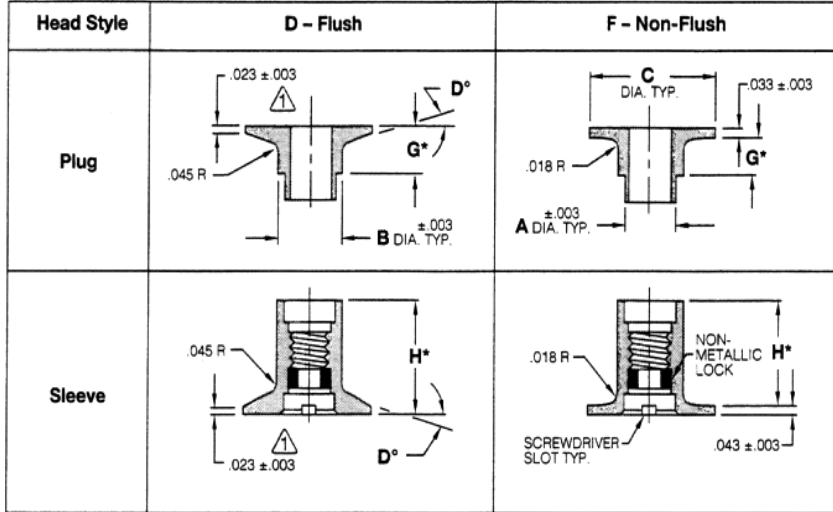

*See Tables 2

Notes:

- [1] Head Thickness = .033 on 524 size Sleeves and 31 size Plugs.
2. Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Table 1


Size		Thread Per MIL-S-8879	A Hole Dia.	B Body Dia.	C Head Dia.	D° Head Angle
Plug	Sleeve					
4	440	.1120-40 UNJC-3B	.116	.216	.375	13°
6	632	.1380-32 UNJC-3B	.144	.309	.500	13°
8	832	.1640-32 UNJC-3B	.169	.309	.500	13°
10	1032	.1900-32 UNJF-3B	.194	.341	.625	13°
25	428	.2500-28 UNJF-3B	.257	.403	.750	14°
31	524	.3125-24 UNJF-3B	.318	.497	.875	14°

Part Number Selection


Two part numbers-Sleeve and Plug-are required for a complete assembly. Consult Rosán for availability of optional materials, finishes, sizes and lengths.

Example:

S 1 0 4 F 428 - 08
P 1 0 4 D 25 AL 0

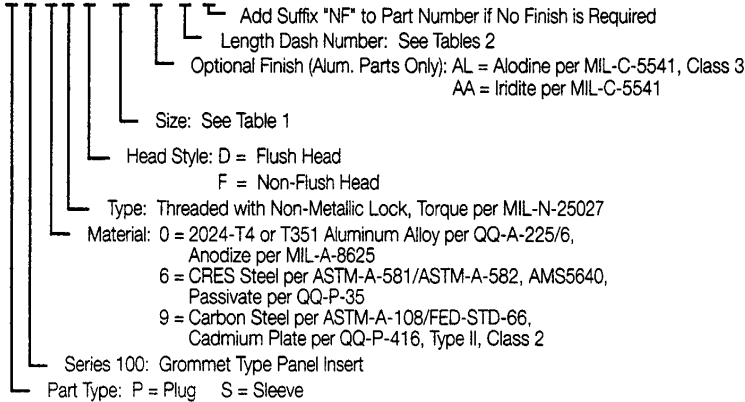

Typical Assembly

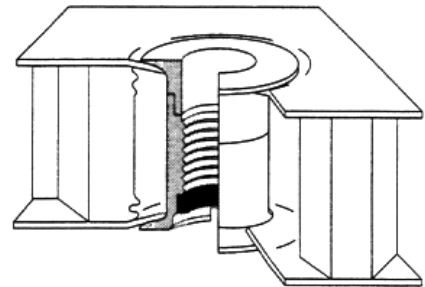

Typical Series 104, Threaded Plug and Sleeve assembly, with Non-Metallic Lock installed in honeycomb sandwich panel. Sleeve and Plug form a telescopic press fit.

Note: For installation and tooling information, see pages 24 and 25.

104 Series - continued

Plug and Sleeve Dash Number Selection

Select Sleeve and Plug Dash Number from Tables 2 by determining the thickness closest to, but not greater than, the panel being used. Longer lengths available using factory installed sleeve extensions. For panel thicknesses less than the minimums listed below, see 104 Series, Thin Panel versions.

 = Panel Thickness

Examples: 1. Requirements: 632 Thread size, Carbon Steel, Flush Head for a .500 overall panel.
From table select:
-0 Plug = P194D6-0
-08 Sleeve = S194D632-08

2. Requirements: 524 Thread size, Aluminum Alloy, Non-Flush Head for a .890 overall panel.
From table select:
-01 Plug = P104F31-01
-14 Sleeve = S104F524-14

Tables 2
632, 832, 1032 and 428 Sizes

Plug Dash Number		-0	-01	-1	-11	-2	-21	-3	-31
		Sleeve Dash Number							
H	G								
		-08	.415	.500	.515	.531	.546	.562	.577
-10	.540	.625	.640	.656	.671	.687	.702	.719	.734
-12	.665	.750	.765	.781	.796	.812	.827	.844	.859
-14	.790	.875	.890	.906	.921	.937	.952	.969	.984
-16	.915	1.000	1.015	1.031	1.046	1.062	1.077	1.094	1.109
-18	1.040	1.125	1.140	1.156	1.171	1.187	1.202	1.219	1.234

*-08 available for 428 size.


524 Size

Plug Dash Number		-0	-01	-1	-11	-2	-21	-3	-31
		Sleeve Dash Number							
H	G								
		-14	.627	.875	.890	.906	.922	.938	.953
-16	.752	1.000	1.015	1.031	1.047	1.063	1.078	1.094	1.110
-18	.877	1.125	1.140	1.156	1.172	1.188	1.203	1.219	1.235

Delron Inserts 104 Series - Thin Panel Threaded with Non-Metallic Lock

Style Selection

Head styles may be combined between Plugs and Sleeves within the same size.

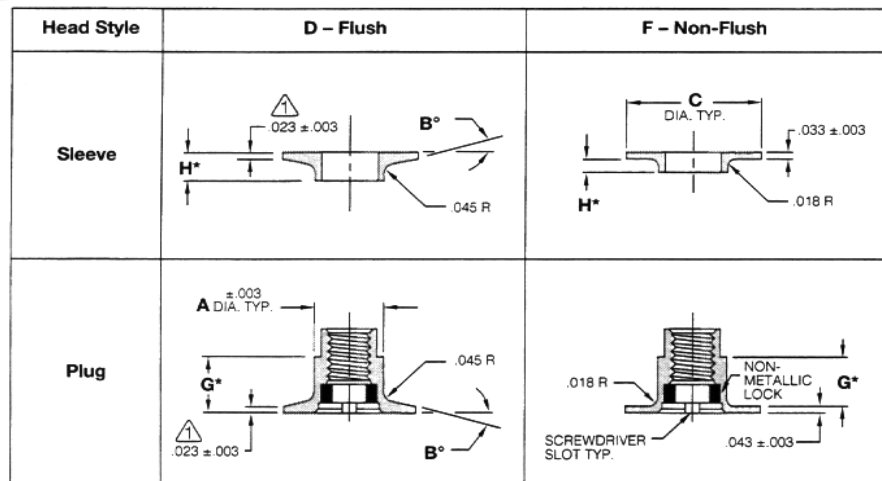

*See Tables 2

Notes:

- <1> Head Thickness = .033 on 524 size Plugs and 31 size Sleeves.
- 2. Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Table 1

Size		Thread Per	A	B°	C
Sleeve	Plug	MIS-S-8879	Body Dia	Head Angle	Head Dia.
4	440	.1120-40 UNJC-3B	.216	13°	.375
6	632	.1380-32 UNJC-3B	.309	13°	.500
8	832	.1640-32 UNJC-3B	.309	13°	.500
10	1032	.1900-32 UNJF-3B	.341	13°	.625
25	428	.2500-28 UNJF-3B	.403	14°	.750
31	524	.3125-24 UNJF-3B	.497	14°	.87

Part Number Selection


Two part numbers-Sleeve and Plug-are required for a complete assembly. Consult Rosán for availability of optional materials, finishes, sizes and lengths.

Example:

P 1 0 4 F 832 - 06
S 1 0 4 D 8 AL 0

- Add Suffix "NF" to Part Number if No Finish is Required
- Length Dash Number: See Tables 2
- Optional Finish (Alum. Parts Only): AL = Alodine per MIL-C-5541, Class 3
AA = Iridite per MIL-C-5541
- Size: See Table 1
- Head Style: D = Flush Head
F = Non-Flush Head
- Type: Threaded with Non-Metallic-Lock, Torque per MIL-N-25027
- Material: 0 = 2024-T4 or T351 Aluminum Alloy per QQ-A-225/6, Red Anodize per MIL-A-8625
6 = CRES Steel per ASTM-A-581/ASTM-A-582, AMS5640, Passivate per QQ-P-35
9 = Carbon Steel per ASTM-A-108/FED-STD-66, Cadmium Plate per QQ-P-416, Type II, Class 2
- Series 100: Grommet Type Panel Insert
- Part Type: P = Plug S = Sleeve

Typical Assembly

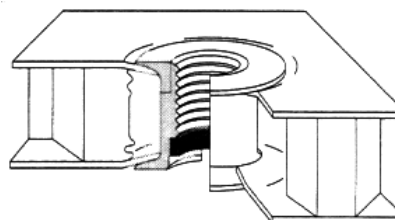


Typical Series 104, Thin Panel, Threaded with Non-Metallic-Lock assembly, installed in honeycomb sandwich panel. Sleeve and Plug form a telescopic press fit.

Note: For installation and tooling information, see pages 24 and 25.

104 Thin Series - continued

Plug and Sleeve Dash Number Selection

Select Sleeve and Plug Dash Number from Tables 2 by determining the thickness closest to, but not greater than, the panel being used.

 = Panel Thickness

Examples: 1. Requirements: 832 Thread size, CRES Steel,
Flush Head for a .265 overall panel.
From table select:
-04 Plug = P164D832-04
-01 Sleeve = PS164D8-01

2. Requirements: 524 Thread size, Aluminum Alloy,
Non-Flush Head for a .700 overall panel.
From table select:
-10 Plug = P104F524-10
-21 Sleeve = S10431-21

Tables 2

440, 632, 832, 1032 and 428 Sizes

Sleeve Dash No.		-0	-01	-1	-11	-2	-21	-3	-31
Plug Dash Number	G	.094	.109	.125	.140	.156	.171	.187	.202
	H	.151	.245	.261	.276	.292	.307	.323	.338
-04		.245	.261	.276	.292	.307	.323	.338	.354
-06		.281	.375	.390	.406	.422	.437	.453	.468
			.375	.390	.406	.422	.437	.453	.468
				.406	.422	.437	.453	.468	.484


524 Size

Sleeve Dash No.		-0	-01	-1	-11	-2	-21	-3	-31
Plug Dash Number	G	.094	.109	.125	.140	.156	.171	.187	.202
	H	.401	.500	.510	.526	.542	.557	.573	.588
-08		.401	.500	.510	.526	.542	.557	.573	.588
-10		.526	.620	.636	.651	.667	.682	.698	.713
-12		.651	.745	.761	.776	.792	.807	.823	.838
			.745	.761	.776	.792	.807	.823	.838
				.776	.792	.807	.823	.838	.854

Delron Inserts106 Series - Threaded with Self-Locking Helical Coil Insert

Style Selection

Head styles may be combined between Plugs and Sleeves within the same size.

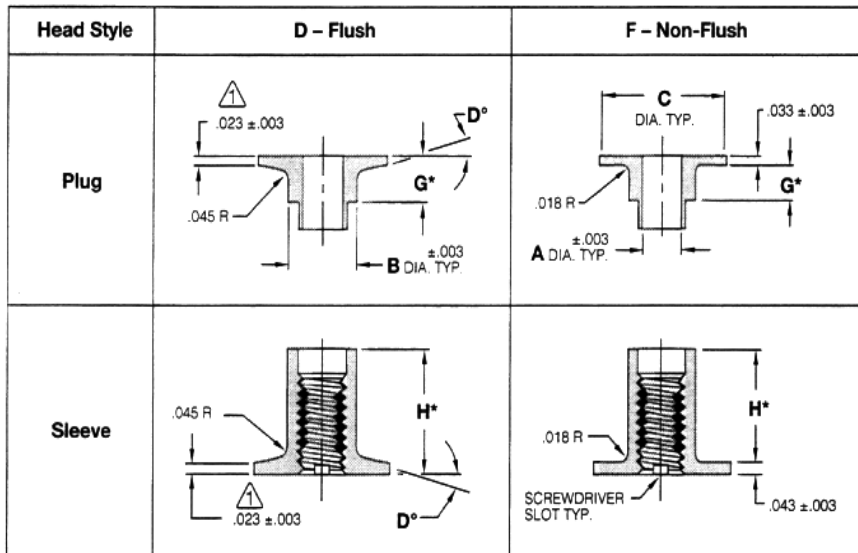

*See Tables 2

Notes:

- [1] Head Thickness = .033 on 524 size Sleeves and 31 size Plugs.
2. Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Table 1


Size		Thread Per MIL-S-8879	A Hole Dia.	B Body Dia.	C Head Dia.	D° Head Angle
Plug	Sleeve					
6	632	.1380-32 UNJC-3B	.144	.309	.500	13°
8	832	.1640-32 UNJC-3B	.169	.309	.500	13°
10	1032	.1900-32 UNJF-3B	.194	.341	.625	13°
25	428	.2500-28 UNJF-3B	.257	.403	.750	14°
31	524	.3125-24 UNJF-3B	.318	.497	.875	14°

Part Number Selection


Two part numbers-Sleeve and Plug-are required for a complete assembly. Consult Rosán for availability of optional materials, finishes, sizes and lengths.

Example:

S 1 0 6 F 428-08
P 1 0 6 D 25 - 0

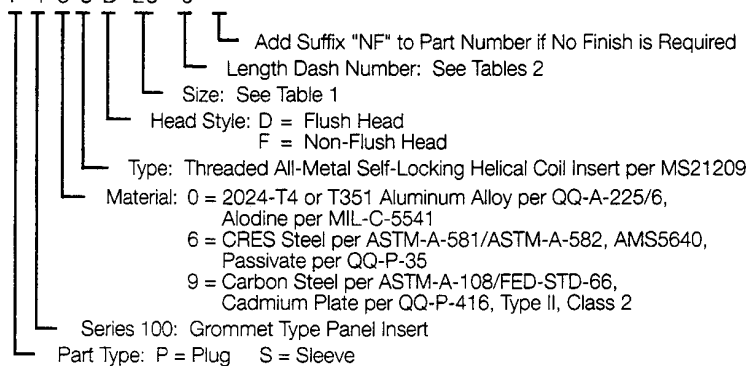

Typical Assembly

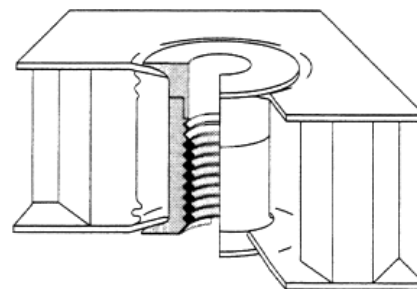

Typical Series 106, Threaded with Self-Locking Helical Coil Insert; Plug and Sleeve assembly, installed in honeycomb sandwich panel. Sleeve and Plug from a telescopic press fit.

Note: For installation and tooling information, see pages 24 and 25.

106 Series - continued

Plug and Sleeve Dash Number Selection

Select Sleeve and Plug Dash Number from Tables 2 by determining the thickness closest to, but not greater than, the panel being used. Longer lengths available using factory installed sleeve extensions. For panel thicknesses less than the minimums listed below, see 104 Series, Thin Panel versions.

 = Panel Thickness

Examples: 1. Requirements: 632 Thread size, Carbon Steel,
Flush Head for a .500 overall panel.
From table select:
-0 Plug = P194D6-0
-08 Sleeve = S194D632-08

2. Requirements: 524 Thread size, Aluminum Alloy,
Non-Flush Head for a .890 overall panel.
From table select:
-01 Plug = P104F31-01
-14 Sleeve = S104F524-14

Tables 2
632, 832, 1032 and 428 Sizes

Plug Dash Number		-0	-01	-1	-11	-2	-21	-3	-31
Sleeve Dash Number	H	.085	.100	.116	.131	.147	.162	.179	.194
	G	.415	.500	.515	.531	.546	.562	.577	.594
-08		.540	.625	.640	.656	.671	.687	.702	.719
-10		.665	.750	.765	.781	.796	.812	.827	.844
-12		.790	.875	.890	.906	.921	.937	.952	.969
-14		.915	1.000	1.015	1.031	1.046	1.062	1.077	1.094
-16		1.040	1.125	1.140	1.156	1.171	1.187	1.202	1.219
-18									

*-08 available for 428 size.


524 Size

Plug Dash Number		-0	-01	-1	-11	-2	-21	-3	-31
Sleeve Dash Number	H	.248	.264	.279	.295	.310	.326	.341	.357
	G	.627	.875	.890	.906	.922	.938	.953	.969
-14		.752	1.000	1.015	1.031	1.047	1.063	1.078	1.094
-16		.877	1.125	1.140	1.156	1.172	1.188	1.203	1.219
-18									

Delron Inserts 106 Series - Thin Panel Threaded with Self-Locking Helical Coil Insert

Style Selection

Head styles may be combined between Plugs and Sleeves within the same size.

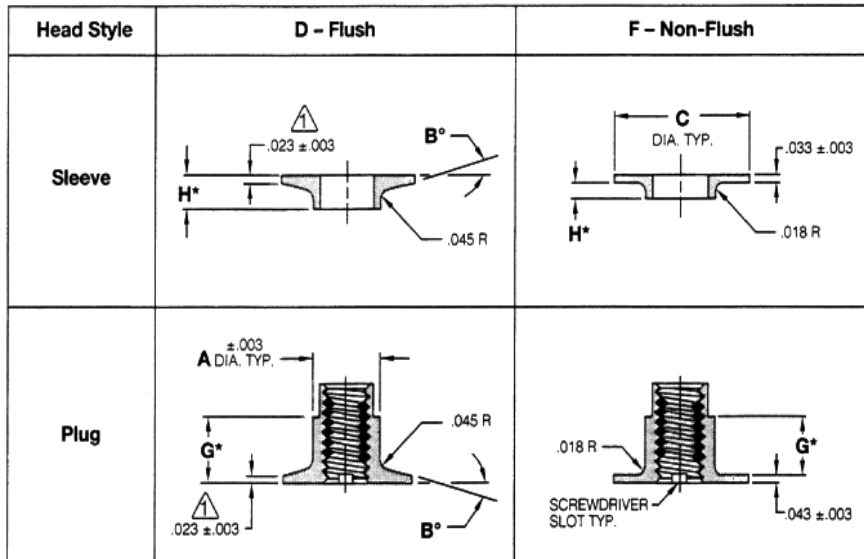

*See Tables 2

Notes:

- [1] Head Thickness = .033 on 524 size Plugs and 31 size Sleeves.
2. Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Table 1

Size		Thread Per MIL-S-8879	A Dia. Tp.	B° Head Angle	C Dia. Typ.
Sleeve	Plug				
6	632	.1380-32 UNJC-3B	.309	13°	.500
8	832	.1640-32 UNJC-3B	.309	13°	.500
10	1032	.1900-32 UNJF-3B	.341	13°	.625
25	428	.2500-28 UNJF-3B	.403	14°	.750
31	524	.3125-24 UNJF-3B	.497	14°	.875

Part Number Selection


Two part numbers-Sleeve and Plug-are required for a complete assembly. Consult Rosán for availability of optional materials, finishes, sizes and lengths.

Example:

P 1 0 6 F 832-06
S 1 0 6 D 8 - 0

Add Suffix "NF" to Part Number if No Finish is Required
Length Dash Number: See Tables 2
Size: See Table 1
Head Style: D = Flush Head
F = Non-Flush Head
Type: Threaded All-Metal Self-Locking Helical Coil Insert per MS21209
Material: 0 = 2024-T4 or T351 Aluminum Alloy per QQ-A-225/6, Anodize per MIL-A-8625
6 = CRES Steel per ASTM-A-581 or ASTM-A-582, AMS 5640, Passivate per QQ-P-35
9 = Carbon Steel per ASTM-A-108/FED-STD-66, Cadmium Plate per QQ-P-416, Type II, Class 2
Series 100: Grommet Type Panel Insert
Part Type: P = Plug S = Sleeve

Typical Assembly

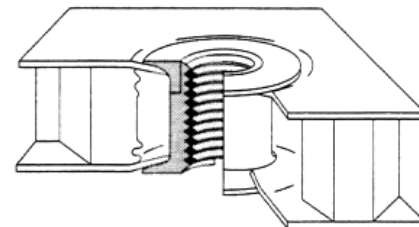


Typical Series 106 Thin Panel, Threaded with Self-Locking Helical Coil Insert; Plug and Sleeve assembly, installed in honeycomb sandwich panel. Sleeve and Plug form a telescopic press fit.

Note: For installation and tooling information, see pages 24 and 25.

106 Thin Series - continued

Plug and Sleeve Length Dash Number Selection

Select Sleeve and Plug Length Dash Number from Tables 2 by determining the thickness closest to, but not greater than, the panel being used.

 = Panel Thickness

Examples: 1. Requirements: 1032 Thread size, CRES Steel,
Flush Head for a .380 overall panel.
From table select:
-06 Plug = P106D10-06
-0 Sleeve = S106D1032-0

2. Requirements: 428 Thread size, Aluminum Alloy
Non-Flush Head for a .530 overall panel.
From table select:
-08 Plug = P106F25-08
-1 Sleeve = S106F428-1

Tables 2
440, 632, 832, 1032, and 428 Sizes

Sleeve Dash No.		-0	-01	-1	-11	-2	-21	-3	-31	
Plug Dash Number	G	H	.094	.109	.125	.140	.156	.171	.187	.202
	-04*	.151	.245	.261	.276	.292	.307	.323	.338	.354
-06	.281	.375	.390	.406	.422	.437	.453	.468	.484	
-08**	.401	.500	.510	.526	.542	.557	.573	.588	.604	

524 Size

Sleeve Dash No.		-0	-01	-1	-11	-2	-21	-3	-31	
Plug Dash Number	G	H	.094	.109	.125	.140	.156	.171	.187	.202
	-08	.401	.500	.510	.526	.542	.557	.573	.588	.604
-10	.526	.620	.636	.651	.667	.682	.698	.713	.729	
-12	.651	.745	.761	.776	.792	.807	.823	.838	.854	

*Not available for 428 size.
**Available in 428 size only.

Installation and Tooling Selection

100 Series, Grommet Type

Permanently installed at sub-assembly, the 100 Series fasteners are self-retained through a telescopic press fit that is a function of the sleeve and plug sections. The use of threaded or threaded self-locking type permits the attachment of components without the use of additional lock nuts.

Panel Preparation

Requires the following:

1. A single diameter thru-hole
2. Standard drill sizes (comparable to body diameter). See table on opposite page
3. Access to both sides of the panel.

Fastener Installation

The most common method of applying the necessary pressure is the use of a hand arbor press, a hydraulic squeezer or any pneumatically operated press.


To assure proper alignment and to direct the pressure to the head of the fastener, the use of a piloted anvil type tool as illustrated is suggested. Alignment tools such as these can be manufactured by your own tooling facilities. Due to the simplicity of this type of tool Ros n does not stock them, but will make them to order for any given type or size.

An average of 1800 pounds for installation pressure is recommended. Excessive pressure may force the telescopic section to over-expand and become loose.


Panel facing sheets up to .032" will dimple automatically to obtain a flush head condition. Thicker sheets may require the use of the non-flush head style fastener. If flushness is required in these thicker facings, pre-dimpling or spot-facing is common practice in the industry.

Fasteners that cannot be installed by conventional methods (such as field installations), may be installed by hand operated pull up tools.


Installation Sequence

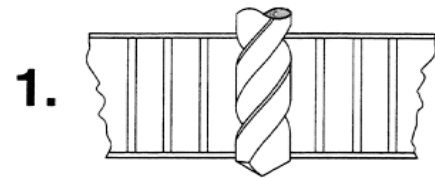


Thru-hole is drilled in panel; drill size is comparable to body diameter of 100 Series insert used.

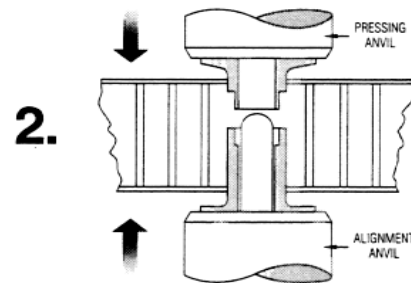

Piloted anvils press sleeve and plug components from opposing sides of panel.

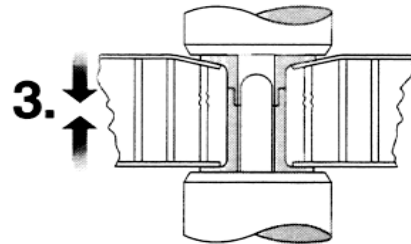

At 300 lbs of installation pressure, facing skins to .032" will dimple automatically.

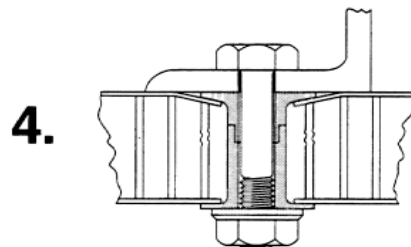

Typical Final Assembly


Tooling Part Numbers

Example: Insert Part Number 102C-10-1 requires Tool Kit Number: 1616-3.


Fastener Series and Sizes	Installation Hole Size	Installation Tooling		
		Tool Kit Number	Pressing Anvil	Alignment Anvil
101(*)12	.290	1612	1612-1	1612-2
101C12		1615-1	1615-1-1	
102(*)4	.228	1613-0	1613-0-1	1613-0-2
102C4		1616-0	1616-0-1	
102(*)6	.290	1613	1613-1	1613-2
102C6		1616-1	1616-1-1	
101(*)15		1614-2	1614-2-1	1614-2-2
102(*)8		1615-2	1615-2-1	
101C15	1616-2	1616-2-1		
102C8				
101(*)18	.323	1614-3	1614-3-1	1614-3-2
102(*)10		1615-3	1615-3-1	
101C18		1616-3	1616-3-1	
102C10				
101(*)25	.390	1614-4	1614-4-1	1614-4-2
102(*)25		1615-4	1615-4-1	
101C25		1616-4	1616-4-1	
102C25				
101(*)28	.421	1674	1674-1	1674-2
101c28		1676	1676-1	1676-2
101(*)31	.484	1614-5	1614-5-1	1614-5-2
102(*)31		1615-5	1615-5-1	
101C31		1616-5	1616-5-1	
102C31				
103(*)440	.228	1617-0	1617-0-1	1617-0-2
104(*)440	.290	1617-1	1613-1	1617-1-2
103(*)632	.323			
104(*)632				
106(*)632	.290	1617-2	1614-2-1	1617-2-2
103(*)832	.323			
104(*)832				
106(*)832	.358	1617-3	1614-3-1	1617-3-2
103(*)1032				
104(*)1032	.390	1617-4	1614-4-1	1617-4-2
106(*)1032	.421			
103(*)428	.484			
104(*)428	.515			
106(*)428				
103(*)524				
104(*)524				
106(*)624				

(*) Fill in 'C', 'D' or 'F' as applicable.


Pressing Anvils For 'D' & 'F' Style Heads




Pressing Anvil For 'C' Style Heads



Alignment Anvils For Thru Hole Type Fasteners

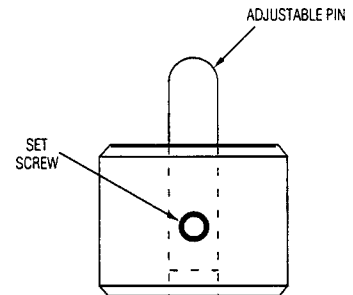

Spring Loaded Alignment Anvils For Threaded Type Fasteners



Delron Inserts

400 SF Series - Snap-In, Floating Nut

Style Selection

All styles feature a .031 inch minimum radial float.

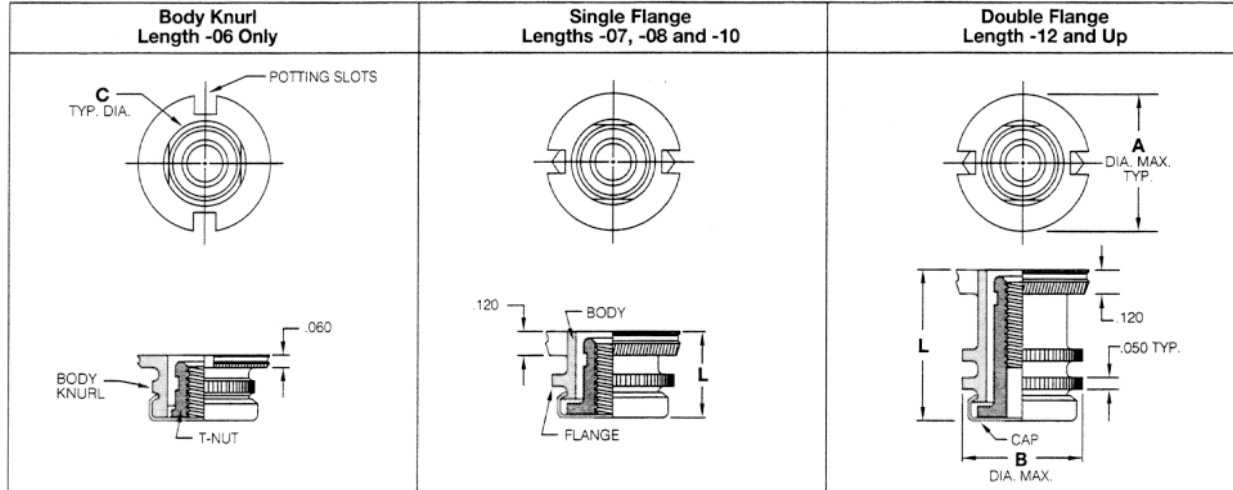


Table 1

Size	Thread Size Per MIL-S-8879	A Head Dia.	B Flange Dia.	C Hole Dia.
440	.1120-40 UNJC-3B	.531	.489	.323
632	.1380-32 UNJC-3B	.531	.489	.323
832	.1640-32 UNJC-3B	.593	.551	.323
1032	.1900-32 UNJF-3B	.593	.511	.323
428	.2500-28 UNJF-3B	.718	.676	.437
524	.3125-24 UNJF-3B	.843	.801	.437
624	.3750-24 UNJF-3B	.968	.926	.515

Materials and Finishes:

- Body: 2024-T4 or T351 Aluminum Alloy per QQ-A-225/6; Alodine per MIL-C-5541.
- Cap: Brass, Cadmium plated, or Aluminum, Anodized at manufacturer's option.
- T-Nut: Options listed in Part Number Selection.


Notes:

- Burrs permissible at knurled areas and underside of head around potting slots.
- Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.


Part Number Selection

Consult Rosán for availability of optional materials, finishes and sizes.

Example:

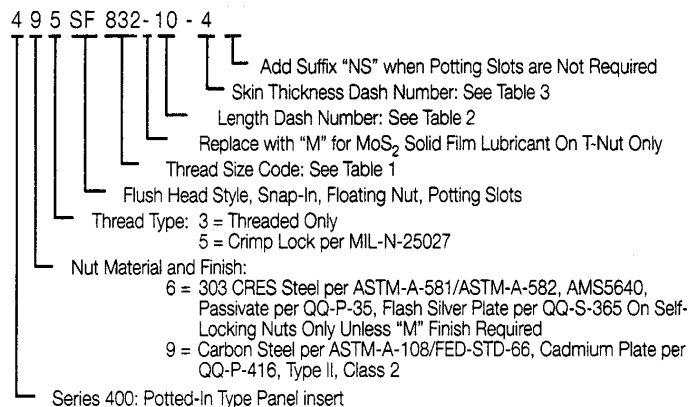

Typical Assembly

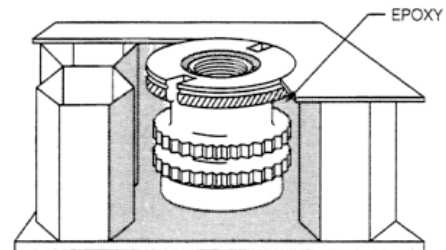

Typical Series 400 SF Snap-In, Floating Nut Insert installed in honeycomb sandwich panel. Insert is held in place by a cured epoxy compound.

Note: For installation and tooling information, see pages 44 and 45.

400 SF Series - continued

Length Dash Number Selection

Select Length Dash Number from Table 2 based on the minimum full thread length required by the application. Insert length "L" must be a minimum of .040" less than depth of panel core (See Fig. 1).


Examples: 1. Requirements: 632 Size Non-Locking Thread, Carbon Steel, Slotted Head, Minimum Full Thread Length of .250 for a panel with a skin thickness of .044, and an overall panel thickness of .650. From table select:

Length Skin
-10 -4 P/N = 493 SF 632-10-4

2. Requirements: 428 Size Crimp Lock Thread, 303 CRES, Non-Slotted Head, Minimum Full Thread Length of .475 for a panel with skin thickness of .035, and an overall panel thickness of .765. From table select:

Length Skin
-12 -3 P/N = 465 SF 428-12-3NS

Fig. 1

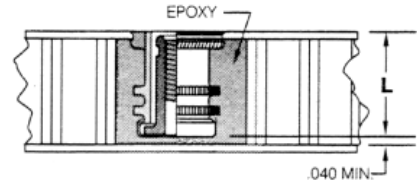

Minimum clearance is required between bottom of insert and inside panel skin for proper epoxy bonding around bottom of insert.

= Minimum Full Thread Length


Table 2

Length Dash Number	L	Thread Size						
		440	632	832	1032	428	524	624
-06*	.335	.292	.292	.292	.292	-	-	-
-07	.395	.224	.276	.328	.350	.350	.350	.350
-08	.455	.224	.276	.328	.380	.410	.410	.410
-10	.565	.224	.276	.328	.380	.500	.520	.520
-12	.690	.224	.276	.328	.380	.500	.625	.645
-14	.812	.224	.276	.328	.380	.500	.625	.750
-16	.935	.224	.276	.328	.380	.500	.625	.750

*Available in -1, -2 and -3 skin thicknesses only.

Table 3

Skin Dash Number	T
-1	.010-.019
-2	.020-.029
-3	.030-.039
-4	.040-.049
-5	.050-.059
-6	.060-.069

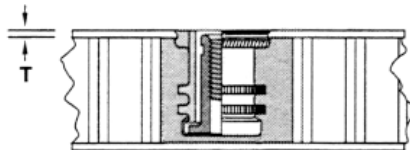

Delron Inserts 400 H, HE Series - Blind Thread

Style Selection

Thread Type	Threaded Only	Non-Metallic Lock	Crimp Lock per MIL-N-25027	Helical Coil Lock per MS21209	
Material*	0, 5, 6 or 9	0, 5, 6 or 9	5, 6 or 9	0, 5, 6 or 9	Double Flange on -07 length and up typical - all styles.

*See "Part Number Selection", below, for description of numerical references.

Head Style	H - Standard Flush	HE - Flush with Potting Slots

Notes:

1. Burrs permissible at knurled areas and underside of head around potting slots.
2. Adhesive backed installation tabs are furnished with each slotted part. See Table 3.
3. Plated or lubed bolts are recommended for use with self-locking cres inserts.
4. Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Table 1

Size	Thread Size Per MIL-S-8879	A Head Dia.	B Flange Dia.	C Body Dia.	D
440	.1120-40 UNJC-3B	.374	.322	.195	.100
632	.1380-32 UNJC-3B	.436	.385	.230	.120
832	.1640-32 UNJC-3B	.499	.447	.290	.120
1032	.1900-32 UNJF-3B	.499	.447	.290	.120
428	.2500-28 UNJF-3B	.561	.510	.353	.140
524	.3125-24 UNJF-3B	.686	.635	.460	.150
624	.3750-24 UNJF-3B	.811	.697	.550	.150

Part Number Selection


Consult Rosán for availability of optional materials, finishes and sizes.

Example:

4 6 5 HE 428-12

- Length Dash Number: See Tables 2
- Size: See Table 1
- Head Style: H = Standard Flush
HE = Flush With Potting Slots
- Thread Type: 3 = Threaded Only
4 = Non-Metallic Lock
5 = Crimp Lock per MIL-N-25027 (Material 5, 6 or 9 Only)
6 = Self-Locking Helical Coil Insert per MS21209
- Material: 0 = 2024-T4 or T351 Aluminum per QQ-A-225/6, Alodine per MIL-C-5541
5 = A286 CRES per AMS 5731, Passivate per QQ-P-35
6 = 303 CRES per ASTM-A-581/ASTM-A-582, AMS5640, Passivate per QQ-P-35.
9 = Carbon Steel per ASTM-A-108/FED-STD-66 Cadmium Plate per QQ-P-416, Type II, Class 2
- Series 400: Potted-In Type Panel Insert

Typical Assembly

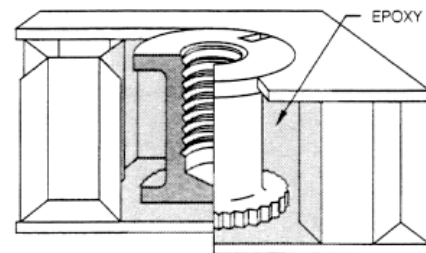

Typical Series 400 HE, Blind Threaded Insert; installed in honeycomb sandwich panel. Insert is held in place by a cured epoxy compound.

Note: For installation and tooling information, see pages 44 and 45.

400 H, HE Series - continued


Length Dash Number Selection

Select Length Dash Number from Tables 2 based on the minimum full thread length required by the application. Insert length "L" must be a minimum of .040" less than depth of panel core (See Fig. 1).

Example: 1. Requirements: 832 size, Non-Metallic Lock Thread, 303 CRES, Slotted Head with a Minimum Full Thread Length of .295, and an overall panel thickness of .520.
From table select:
-08 P/N = 464HE832-08

2. Requirements: 440 Size Helical Coil Lock, Carbon Steel, Flush Head, with a Minimum Full Thread Length of .150, and an overall panel thickness of .455.
From table select:
-07 P/N = 496H440-07

Fig. 1

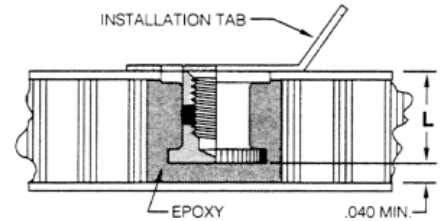

Minimum clearance is required between bottom of insert and inside panel skin for proper epoxy bonding around bottom of insert.

Tables 2
All Thread Types Except Helical Coil Lock

= Minimum Full Thread Length

Length Dash Number	L	Thread Size						
		440	632	832	1032	428	524	624
-04*	.220	.170	.170	.170	.170	-	-	-
-05*	.285	.190	.190	.190	.190	.235	-	-
-06*	.335	.225	.235	.235	.235	.250	-	-
-07	.395	.250	.280	.280	.280	.250	-	-
-08	.455	.250	.280	.330	.330	.330	.320	-
-10	.565	.250	.280	.330	.380	.420	.430	.425
-12	.690	.250	.280	.330	.380	.500	.550	.550
-14	.815	.250	.280	.330	.380	.500	.625	.625
-16	.935	.250	.280	.330	.380	.500	.625	.750

*Close out disc required to provide minimum full thread.

Helical Coil Lock Types

Length Dash Number	L	Thread Size						
		440	632	832	1032	428	524	624
-06	.335	.112	-	-	-	-	-	-
-07	.395	.168	.138	-	-	-	-	-
-08	.455	.224	.207	.164	.190	-	-	-
-10	.565	.224	.276	.246	.285	.250	-	-
-12	.690	.224	.276	.328	.380	.375	.312	-
-14	.815	.224	.276	.328	.380	.500	.469	.375
-16	.935	.224	.276	.328	.380	.500	.469	.562

Installation Tabs

Adhesive backed installation tabs are supplied with all 400 HE Series Inserts, unless otherwise specified. The tabs are coded by insert thread size as listed in Table 3.




Table 3

Thread Size	Installation Tab Number
440	T16
632	T21
832	T4
1032	T4
428	T6
524	T9
624	T11

Delron Inserts

400 HF Series - Floating Nut

Style Selection

All styles feature a .031 inch minimum radial float.

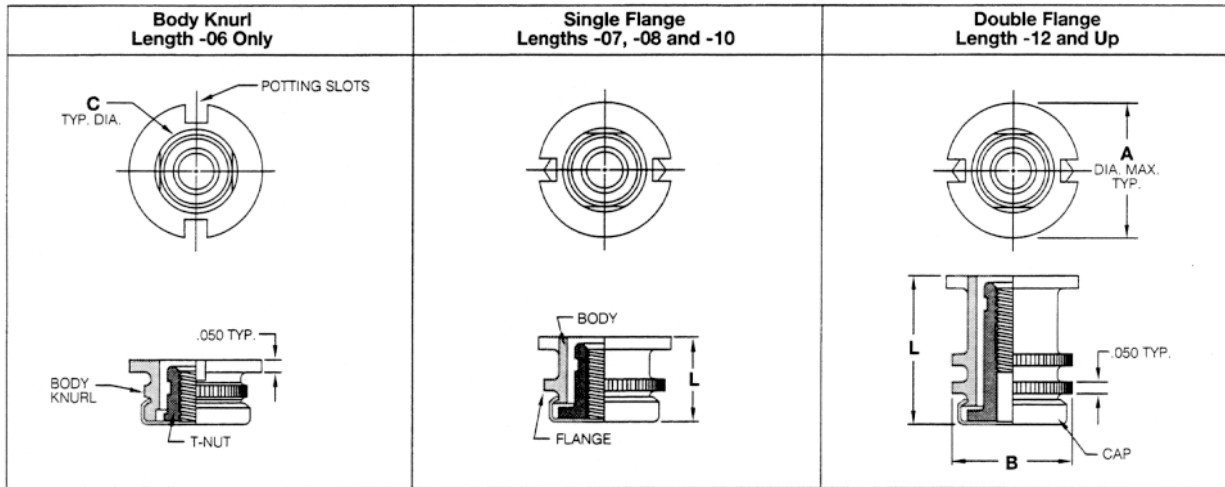


Table 1

Size	Thread Size Per MIL-S-8879	A Head Dia.	B Flange Dia.	C Hole Dia.
440	.1120-40 UNJC-3B	.499	.489	.323
632	.1380-32 UNJC-3B	.499	.489	.323
832	.1640-32 UNJC-3B	.561	.551	.323
1032	.1900-32 UNJF-3B	.561	.551	.323
428	.2500-28 UNJF-3B	.686	.676	.437
524	.3125-24 UNJF-3B	.811	.801	.437
624	.3750-24 UNJF-3B	.936	.926	.515

Materials and Finishes:

Body: 2024-T4 or T351 Aluminum Alloy per QQ-A-225/6; Alodine per MIL-C-5541.

Cap: Brass, Cadmium plated, or Aluminum, Anodized at manufacturer's option.

T-Nut: Options listed in Part Number Selection.


Notes:

- Burrs permissible at 0knurled areas and underside of head around potting slots.
- Adhesive backed installation tabs are furnished with each slotted part. See Table 3.
- Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.


Part Number Selection

Consult Rosán for availability of optional materials, finishes and sizes.

Example:

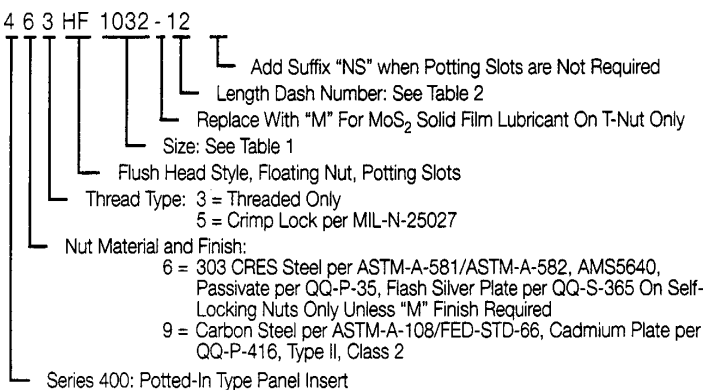

Typical Assembly

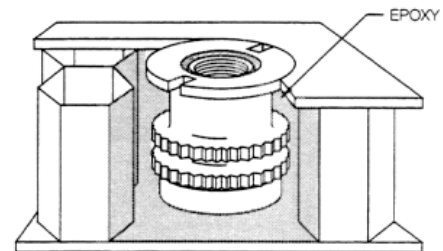

Typical Series 400 HF, Floating Nut Insert; installed in honeycomb sandwich panel. Insert is held in place by a cured epoxy compound.

Note: For installation and tooling information, see pages 44 and 45.


400 HF Series - continued

Length Dash Number Selection

Select Length Dash Number from Table 2 based on the minimum full thread length required by the application. Insert length "L" must be a minimum of .040" less than depth of panel core (See Fig. 1).

- Examples:
- Requirements: 428 Size Normal Thread, Carbon Steel Nut, MoS₂ Lubricant, with a Minimum Full Thread Length of .400, and an overall panel thickness of .520.
From table select:
-08 P/N = 493HF 428M08
 - Requirements: 1032 Size Crimp Lock Thread, CRES Steel Nut, No Slots, a Minimum Full Thread Length of .380, and an overall panel thickness of .880.
From table select:
-14 P/N = 465HF 1032-14NS

Fig. 1

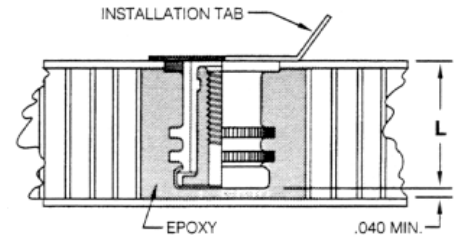

Minimum clearance is required between bottom of insert and inside panel skin for proper epoxy bonding around bottom of insert.

Table 2

Length Dash Number	L	Thread Size						
		440	632	832	1032	428	524	624
-06	.335	.224	.276	.292	.292	—	—	—
-07	.395	.224	.276	.328	.350	.350	.350	.350
-08	.455	.224	.276	.328	.380	.410	.410	.410
-10	.565	.224	.276	.328	.380	.500	.520	.520
-12	.690	.224	.276	.328	.380	.500	.625	.645
-14	.815	.224	.276	.328	.380	.500	.625	.750
-16	.935	.224	.276	.328	.380	.500	.625	.750

= Minimum Full Thread Length

Installation Tabs

Adhesive backed installation tabs are supplied with all 400 HF Series Inserts, unless otherwise specified. The tabs are coded by insert thread size as listed in Table 3.




Table 3

Thread Size	Installation Tab Number
440	T13
632	T13
832	T6
1032	T6
428	T9
524	T11
624	T27

Delron Inserts 400 S, SE Series - Snap-In

Style Selection

Thread Type	Threaded Only	Non-Metallic Lock	Crimp Lock per MIL-N-25027	Helical Coil Lock per MS21209	
Material*	0, 6 or 9	0, 6 or 9	6 or 9 only	0, 6 or 9	Double Flange on -.08 and up typical - all styles.

*See "Part Number Selection", below, for description of numerical references.

Head Style	S - Snap-In	SE - Snap-In with Potting Slots

Notes:

1. Burrs permissible at knurled areas and on underside of head around potting slots.
2. Plated or lubed bolts are recommended for use with self-locking cres inserts.
3. Tolerances, unless otherwise specified: .xxx ± .010; Angles 1 2°.

Table I

Size	Thread Size Per MIL-S-8879	A Head Dia.	B Flange Dia.	C Body Dia.	D
440	.1120-40 UNJC-3B	.375	.312	.195	.165*
632	.1380-32 UNJC-3B	.437	.375	.230	.175*
832	.1640-32 UNJC-3B	.500	.437	.290	.185*
1032	.1900-32 UNJF-3B	.500	.437	.290	.185*
428	.2500-28 UNJF-3B	.562	.500	.353	.190
524	.3125-24 UNJF-3B	.687	.625	.460	.200
624	.3750-24 UNJF-3B	.812	.687	.550	.200

*Reduce "D" dimension by 0.30 inch when ordering -.04 lengths in sizes 440 thru 1032.

Part Number Selection


Consult Rosá for availability of optional materials, finishes and sizes.

Example:

4 0 6 SE 832-10-2

- 4 0 6 SE 832-10-2
- Top Skin Thickness Dash Number: See Table 3
- Length Dash Number: See Tables 2
- Size: See Table I
- Head Style: S = Snap-In
SE = Snap-In with Potting Slots
- Thread Type: 3 = Threaded Only
4 = Non-Metallic Lock
5 = Crimp Lock per MIL-N-25027 (Material 6 or 9 only)
6 = Self-Locking Helical Coil Insert per MS21209
- Material: 0 = 2024-T4 or T351 Aluminum per QQ-A-225/6, Alodine per MIL-C-5541
6 = 303 CRES per AMS5640, ASTM-A-581/ASTM-A-582, Passivate per QQ-P-35
9 = Carbon Steel per ASTM-A-108/FED-STD-66, Cadmium Plate per QQ-P-416, Type II, Class 2
- Series 400: Potted-In Type

Typical Assembly

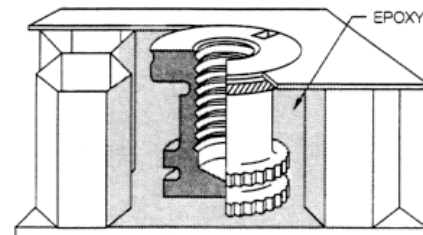

Typical Series 400 S, SE Snap-In Insert; installed in honeycomb sandwich panel. Insert is held in place by a cured epoxy compound.

Note: For installation and tooling information, see pages 44 and 45.

400 S, SE Series – continued

Length and Skin Thickness Dash Number Selection

Select Length Dash Number from Tables 2 based on the minimum full thread length required by the application. Insert length "L" must be a minimum of .040" less than depth of panel core (See Fig. 1).


Examples: 1. Requirements: 440 Size Crimp Lock Thread, Carbon Steel, Slotted Head, Minimum Full Thread Length of .200, for a panel with a skin thickness of .035, and an overall panel thickness of .410. From tables select:

Length Skin
-06 -3 P/N = 495 SE 440-06-3

2. Requirements: 624 Size Helical Coil Lock, Aluminum Alloy, Non-Slotted Head, Minimum Full Thread Length of .400, for a panel with skin thickness of .060, and an overall panel thickness of 1.035. From tables select:

Length Skin
-16 -6 P/N = 406 S 624-16-6

Fig. 1

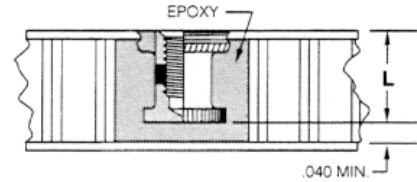

Minimum clearance is required between bottom of insert and inside panel skin for proper epoxy bonding around bottom of insert.

Tables 2

All Thread Types Except Helical Coil Lock

= Minimum Full Thread Length

Length Dash Number	L	Thread Size						
		440	632	832	1032	428	524	624
-04*†	.220	.170	.170	.170	.170	—	—	—
-05*	.285	.190	.190	.190	.190	.235	—	—
-06*	.335	.225	.235	.235	.235	.250	—	—
-07	.395	.250	.280	.280	.280	.250	—	—
-08	.455	.250	.280	.330	.330	.330	.320	—
-10	.565	.250	.280	.330	.380	.420	.430	.425
-12	.690	.250	.280	.330	.380	.500	.550	.550
-14	.815	.250	.280	.330	.380	.500	.625	.750
-16	.935	.250	.280	.330	.380	.500	.625	.750


*Close out disc required to provide minimum full thread. † Available in -1, -2 and -3 skin thicknesses only; see Table 3 below.

Helical Coil Lock Types

Length Dash Number	L	Thread Size						
		440	632	832	1032	428	524	624
-06	.335	.112	—	—	—	—	—	—
-07	.395	.168	.138	—	—	—	—	—
-08	.455	.224	.207	.164	.190	—	—	—
-10	.565	.224	.276	.246	.285	.250	—	—
-12	.690	.224	.276	.328	.380	.375	.312	—
-14	.815	.224	.276	.328	.380	.500	.469	.375
-16	.935	.224	.276	.328	.380	.500	.469	.562

Tables 3





Skin Dash Number	T
-1	.010-.019
-2	.020-.029
-3	.030-.039
-4	.040-.049
-5	.050-.059
-6	.060-.069

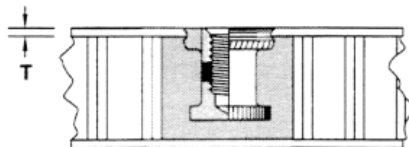

Delron Inserts

D1832 Series - NAS 1832 Equivalent

Style Selection

Thread Type	Nonself-Locking – Threaded Only	Self-Locking per MIL-N-25027 	
		Crimp Lock	Non-Metallic Lock
			
Material*	(-), A, or C	(-) or C	A

*See "Part Number Selection", opposite, for description of Material codes.

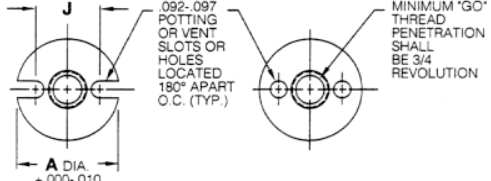
Head Style	Potting Vent Slots or Holes — Manufacturer's Option
	


Table 1

Size	Thread Size Per MIL-S-8879	A Head Dia.	B Body Dia.	C	D Body Dia.	E Flat	F Flange Dia.	H Min.	J	L Min.
06	.1380-32 UNJC-3B	.560	.300	.12	.375	.400	.560	.250	.367	.37
08	.1640-32 UNJC-3B	.560	.300	.12	.375	.400	.560	.250	.367	.37
3	.1900-32 UNJF-3B	.560	.300	.12	.375	.400	.560	.250	.367	.37
4	.2500-28 UNJF-3B	.685	.375	.14	.440	.520	.685	.312	.467	.50
5	.3125-24 UNJF-3B	.685	.475	.16	.500	.520	.685	.312	.467	.50
6	3750-24 UNJF-3B	.841	.500	.22	.550	.560	.841	.375	.591	.50

Notes:

- Burrs caused by machining of potting holes or slots permissible under flange.
- Adhesive backed installation tab, D1837, shall be furnished with each insert. See page 44.
- Plated or solid film lubricant is recommended on self-locking CRES inserts.
- Minimum thread "H", where length permits, shall be 2 diameters.
- Self-locking, 303 CRES inserts without plating or lubricant will be tested using a silver plated bolt or screw.
- Locate locking pellet no closer than 10° from edge of either potting holes or slots.
- Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Typical Assembly

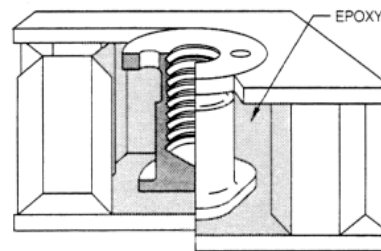

Typical Series D1832 Blind Threaded Insert (NAS 1832 equivalent); installed in honeycomb sandwich panel. Insert is held in place by a cured epoxy compound.

Note: For installation and tooling information, see pages 44 and 45.

D1832 Series - continued

Insert Length Determination

The length of the insert is specified by a dash number which defines .125 inch increments. Insert length must be a minimum of .040 inch less than depth of panel core (See Fig. 1).

Example: -6 = .750
 -11 = 1.375 inch

“L” Notes:

1. Specified in .125 inch increments.
2. Minimum “L” values are listed in Table 1, opposite.
3. Maximum bolt engagement should not exceed “L” minus .060 inch.

Part Number Selection

Consult Rosán for availability of optional materials, finishes and sizes.

Example:


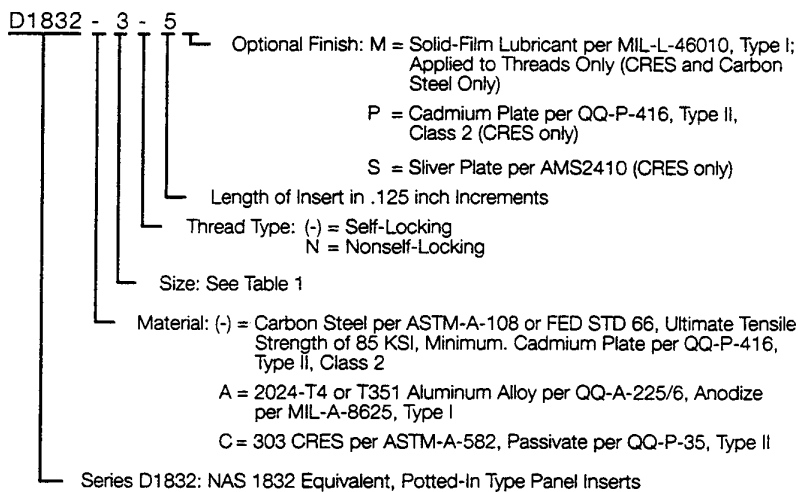


Fig. 1

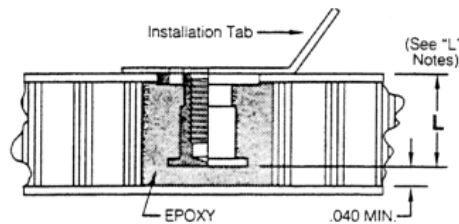


Minimum clearance is required between bottom of insert and inside panel skin for proper epoxy bonding around bottom of insert.

Part Number Example:

1. Requirements:

.1900-32 Thread size, Self-Locking, Aluminum Screw Engagement of .50 inch, and an overall panel thickness of .750.


Part Number:

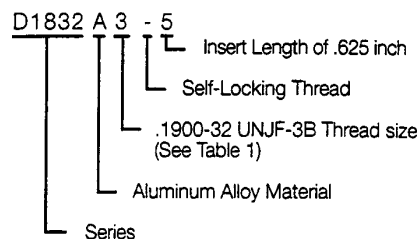

2. Requirements:

.1640-32 Thread size, Nonself-Locking, Carbon Steel with Solid Film Lubricant, Thread Engagement of .25 inch and an overall panel thickness of .50 inch.

Part Number:

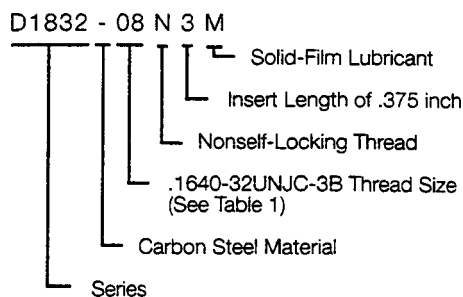

Delron Inserts D1833 Series - NAS 1833 Equivalent

Style Selection

Thread Type	Nonself-Locking – Threaded Only	Self-Locking per MIL-N-25027	
		Crimp Lock	Non-Metallic Lock
Material*	(-), A, or C	(-) or C	A

*See "Part Number Selection", opposite, for description of Material codes.

Head Style	Potting Vent Slots or Holes — Manufacturer's Option


Table 1

Size	Thread Size Per MIL-S-8879	A Head Dia.	B Dia.	C	D Dia.	J	L Min.
06	.1380-32 UNJC	.560	.300	.12	.375	.367	.250
08	.1640-32 UNJC	.560	.300	.12	.375	.367	.250
3	.1900-32 UNJF	.560	.300	.12	.375	.367	.250
4	.2500-28 UNJF	.685	.375	.14	.440	.467	.312
5	.3125-24 UNJF	.685	.475	.16	.500	.467	.312
6	.3750-24 UNJF	.841	.500	.22	.550	.591	.375

Notes:

- Burrs caused by machining of potting holes or slots permissible under flange.
- Adhesive backed installation tab, D1837, shall be furnished with each insert. See page 44.
- Plated or solid film lubricant is recommended on self-locking CRES inserts.
- Minimum thread "H", where length permits, shall be 2 diameters. Lengths shorter than 2 diameters will be threaded the entire length.
- Self-locking, 303 CRES inserts without plating or lubricant will be tested using a silver plated bolt or screw.
- Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Typical Assembly

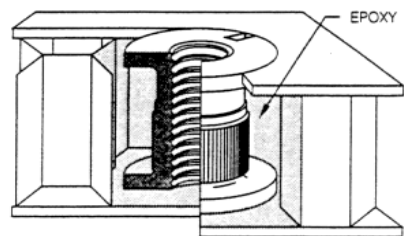

Typical Series D1833 Blind Thru-Threaded Insert (NAS 1833 equivalent); installed in honeycomb sandwich panel. Insert is held in place by a cured epoxy compound.


Note: For installation and tooling information, see pages 44 and 45.

D1833 Series - continued

Part Number Selection

Consult Rosán for availability of optional materials, finishes and sizes.

Example:

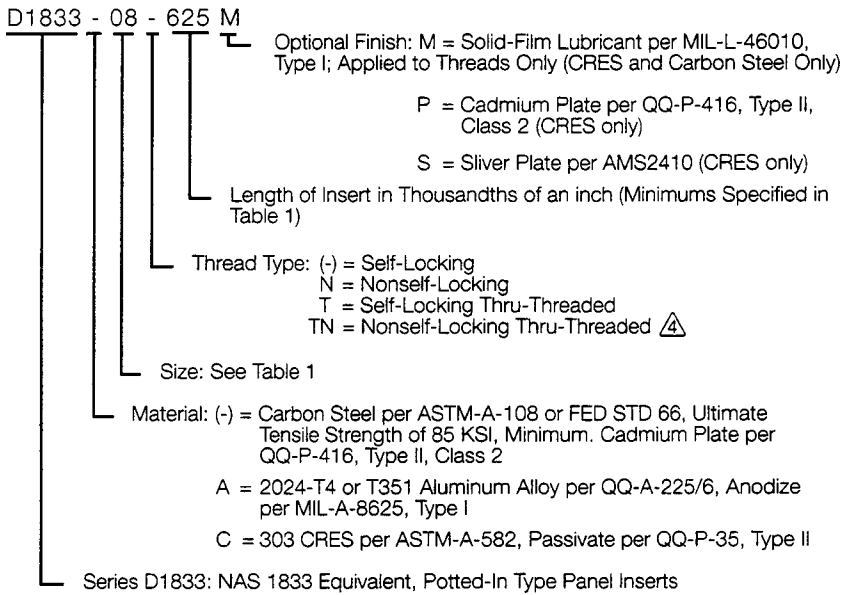


Part Number Example:

1. Requirements:

.2500-28 Thread size, Nonself-Locking, Thru-Thread 303 CRES with Silver Plating, and an overall panel thickness of .450 inch.


Part Number:

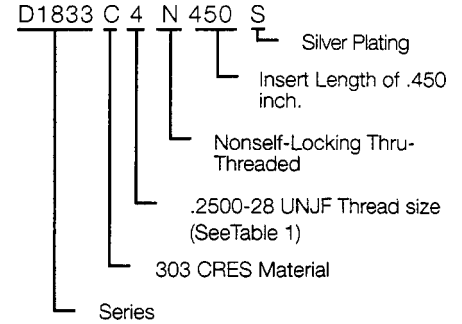

2. Requirements:

.3750-24 Thread size, Self-Locking, Thru-Thread, Carbon Steel, and an overall panel thickness of .825 inch.

Part Number:

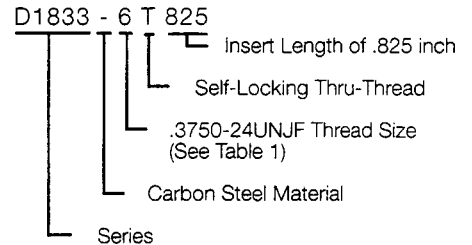

Delron Inserts D1834 Series — NAS 1834 Equivalent

Style Selection

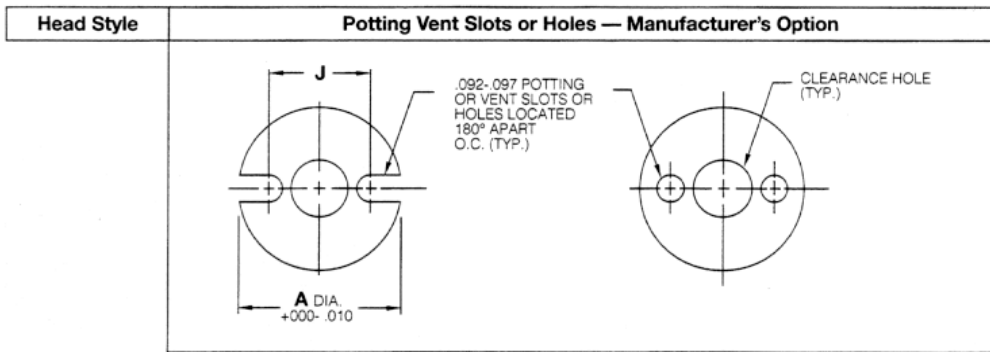
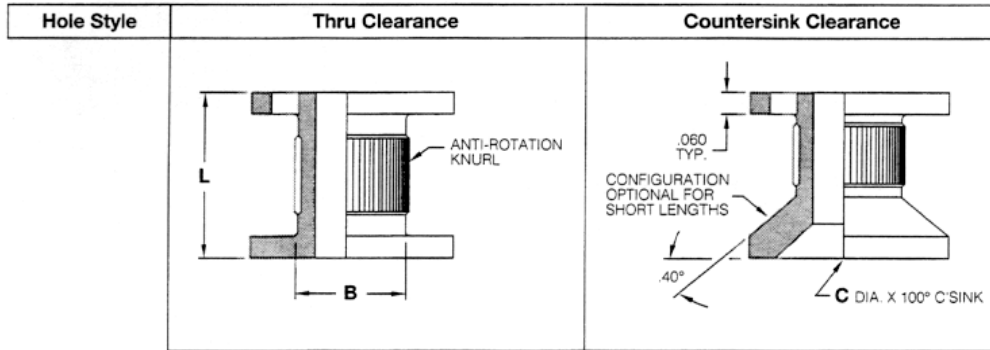



Table 1

Size	Clearance Hole Per AND10387	A Head Dia.	B Dia.	C Dia.	J	L Min.
06	.140	.560	.300	.280	.367	.250
08	.169	.560	.300	.332	.367	.250
3	.196	.560	.300	.385	.367	.250
4	.257	.685	.375	.507	.467	.312
5	.316	.685	.475	.625	.467	.312
6	.377	.841	.500	.750	.591	.375

Notes:

1. Burrs caused by machining of potting holes or slots permissible under flange.
2. Adhesive backed installation tab, D1837, shall be furnished with each insert. See page 44.
3. Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Typical Assembly

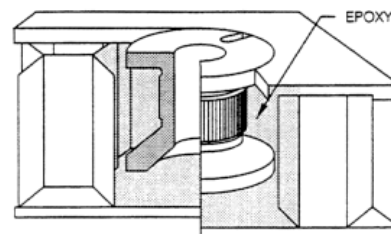

Typical Series D1834 Clearance Hole Insert (NAS 1834 equivalent); installed in honeycomb sandwich panel. Insert is held in place by a cured epoxy compound.


Note: For installation and tooling information, see pages 44 and 45.

D1834 Series — continued

Part Number Selection

Consult Rosán for availability of optional materials, finishes and sizes.

Example:

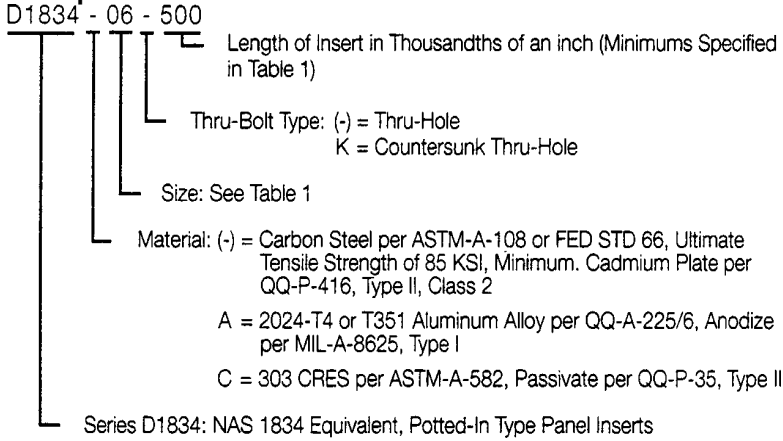


Part Number Example:

1. Requirements:

.250 Diameter Clearance Hole, Countersunk, Aluminum Alloy, and an overall panel thickness of .375 inch.

Part Number:

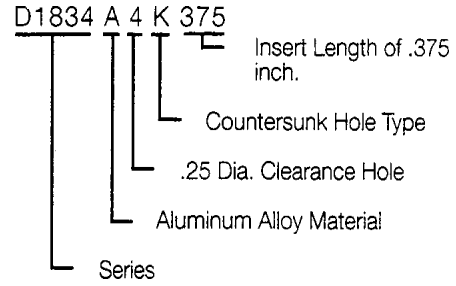

Delron Inserts D1835 Series — NAS 1835 Equivalent

Style Selection

All styles feature .032 inch minimum radial float.

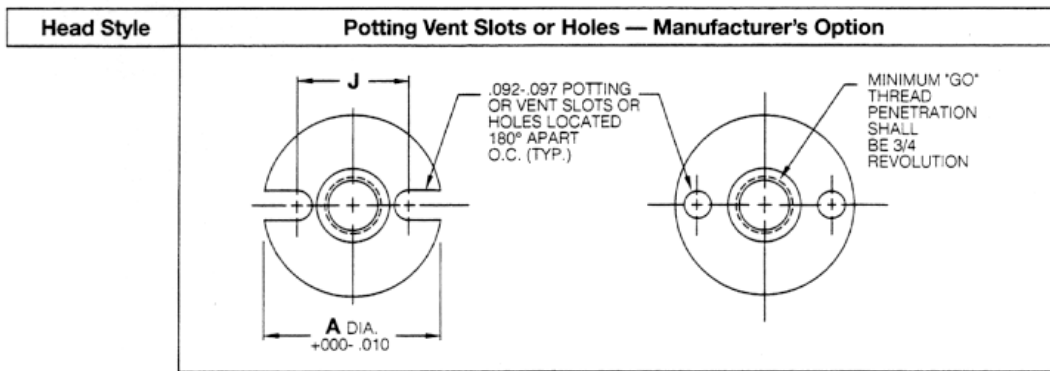
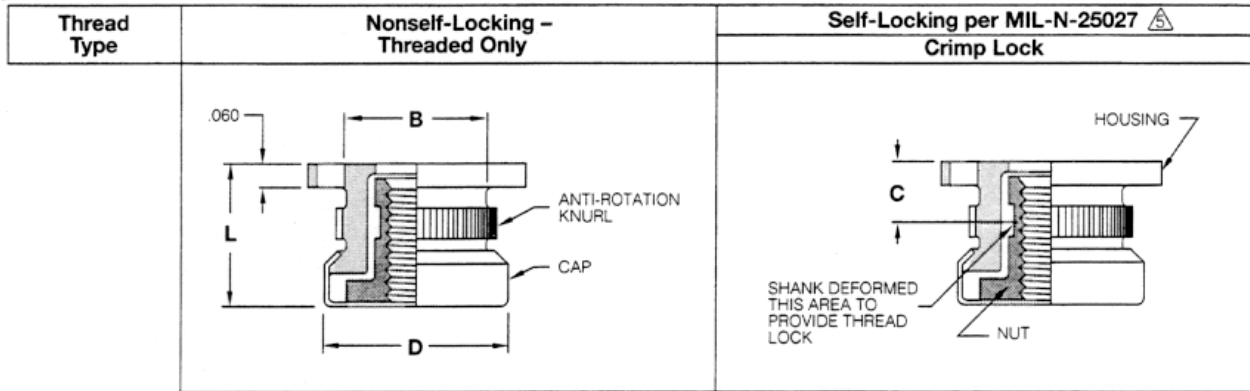



Table 1

Size	Thread Size Per MIL-S-8879	A Head Dia.	B Dia.	C	D Dia.	J	L <4> Min.
08	.1640-32 UNJC	.685	.403	.16	.535	.500	.37
3	.1900-32 UNJF	.685	.403	.16	.535	.500	.43
4	.2500-28 UNJF	.748	.570	.18	.725	.591	.56
5	.3125-24 UNJF	.810	.617	.20	.790	.655	.75
6	.3750-24 UNJF	.873	.700	.22	.855	.718	.81

Notes:

- Burrs caused by machining of potting holes or slots permissible under flange.
- Adhesive backed installation tab, D1837, shall be furnished with each insert. See page 44.
- Plated or solid film lubricant is recommended on self-locking CRES inserts.
- <4> Maximum bolt engagement should not exceed "L" minus .060. See Table 1.
- <5> Self-locking, 303 CRES inserts without plating or lubricant will be tested using a silver plated bolt or screw.
- Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Typical Assembly

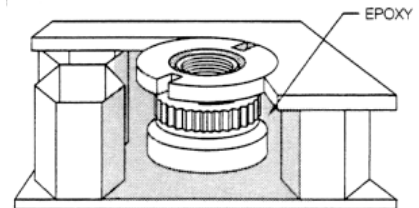

Typical Series D1835 Floating Nut Insert (NAS 1835 equivalent); installed in honeycomb sandwich panel. Insert is held in place by a cured epoxy compound

Note: For installation and tooling information, see pages 44 and 45.


D1835 Series — continued

Part Number Selection

Consult Rosán for availability of optional materials, finishes and sizes.

Example:

D1835 C 08 P N

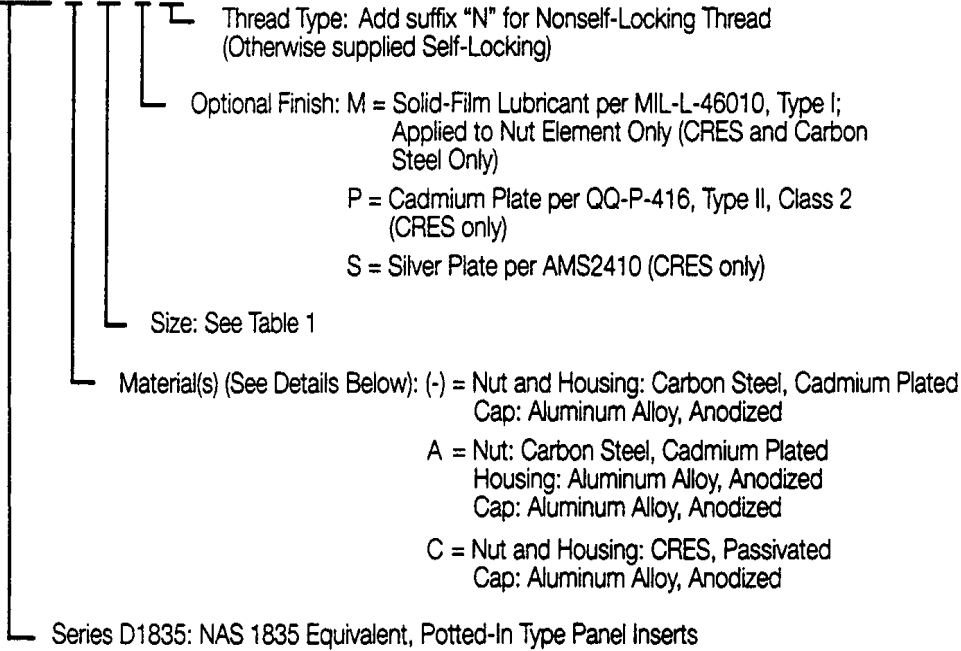

Materials and Finishes

Carbon Steel	Per ASTM-A-108 or FED STD 66, Ultimate Tensile Strength of 85 KSI, Minimum. Cadmium Plate per QQ-P-416, Type II, Class 2.
Aluminum	Housing: 2024-T4 or T351 Aluminum Alloy per QQ-A-225/6, Anodize per MIL-A-8625, Type I. Cap: 3003H14 Aluminum Alloy per QQ-A-250/2, Anodize per MIL-A-8625 Type I.
CRES	303 CRES per ASTM-A-582, Passivate per QQ-P-35, Type II.

Delron Inserts D1836 Series — NAS 1836 Equivalent

Style Selection

Thread Type	Nonself-Locking – Threaded Only	Self-Locking per MIL-N-25027	
		Crimp Lock	Non-Metallic Lock
Material*	(-), A, or C	(-) or C	A

*See "Part Number Selection", opposite, for description of Material codes.

Head Style	Potting Vent Slots or Holes — Manufacturer's Option


Table 1

Size	Thread Size Per MIL-S-8879	A Head Dia.	B Dia.	C	E	F Max.	H	J Min.	L
06	.1380-32 UNJC	.451	.250	.12	.260	.45	.187	.358	.218
08	.1640-32 UNJC	.451	.250	.12	.260	.45	.187	.358	.218
3	.1900-32 UNJF	.451	.250	.12	.260	.45	.187	.358	.218
4	.2500-28 UNJF	.498	.300	.14	.312	.49	.250	.405	.281

Notes:

- Burrs caused by machining of potting slots permissible under flange.
- Adhesive backed installation tab, D1837, shall be furnished with each insert. See page 44.
- Plated or solid film lubricant is recommended on self-locking CRES inserts.
- Minimum thread "H", where length permits, shall be 2 diameters.
- Self-locking, 303 CRES inserts without plating or lubricant will be tested using a silver plated bolt or screw.
- Tolerances, unless otherwise specified: .xxx ±.010; Angles ± 2°.

Typical Assembly

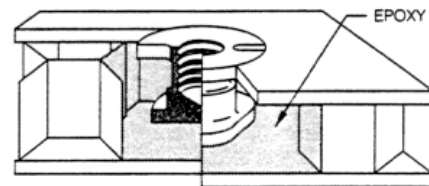

Typical Series D1834 Clearance Hole Insert (NAS 1834 equivalent); installed in honeycomb sandwich panel. Insert is held in place by a cured epoxy compound.

Note: For installation and tooling information, see pages 44 and 45.

D1836 Series — continued

Insert Length Determination

The length of the insert is specified by a 2-digit dash number which defines .031 inch increments. Insert length must be a minimum of .040 inch less than depth of panel core (See Fig. 1).

Example: -07 = .218 inch
 -14 = .437 inch

“L” Notes:

1. Specified in .031 inch increments.
2. Minimum “L” values are listed in Table 1, opposite.
3. Maximum bolt engagement should not exceed “L” minus .060 inch.

Part Number Selection

Consult Rosán for availability of optional materials, finishes and sizes.

Example:


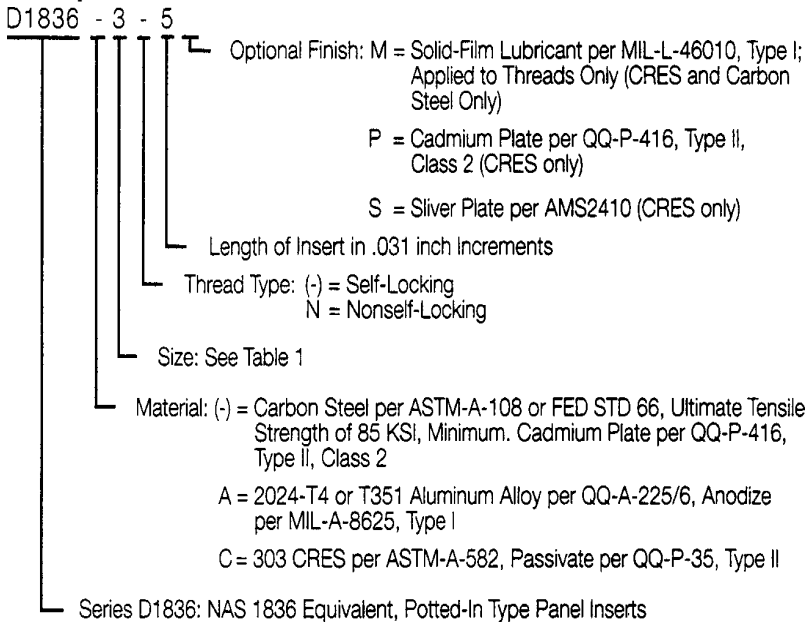


Fig. 1

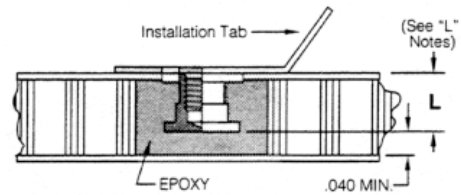


Minimum clearance is required between bottom of insert and inside panel skin for proper epoxy bonding around bottom of insert.

Part Number Example:

1. Requirements:

.1900-32 Thread size, Self-Locking, Aluminum Alloy, Screw Engagement of .50 inch, and an overall panel thickness of .750.


Part Number:

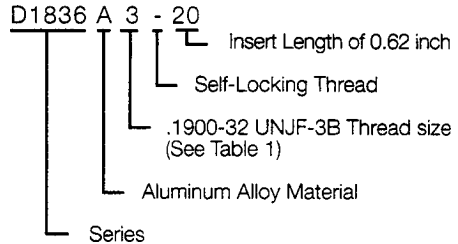

2. Requirements:

.1640-32 Thread size, Nonself-Locking, Carbon Steel with Solid Film Lubricant, Thread Engagement of .25 inch and an overall panel thickness of .50 inch.

Part Number:

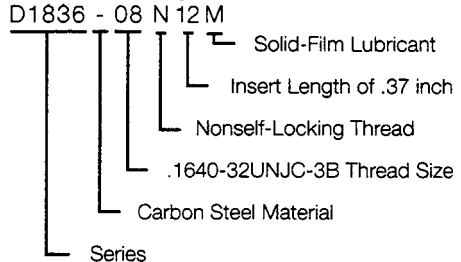

Delron Inserts D1837 Series — NAS 1837 Equivalent

Style Selection

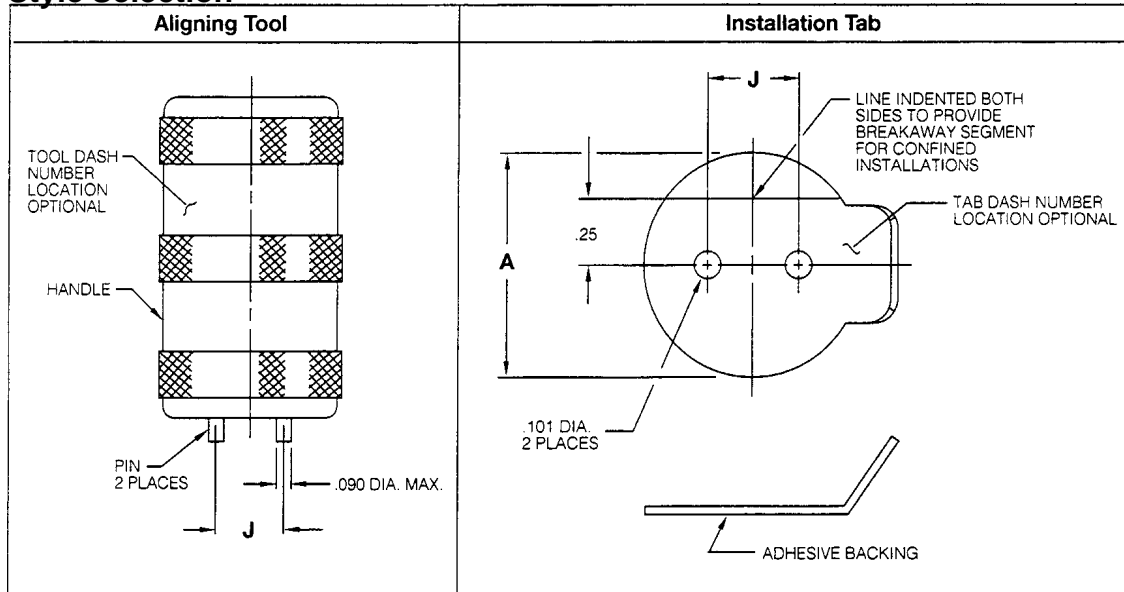


Table 1 — For D1832, D1833 and D1834

Insert First Dash Number	Aligning Tool	Installation Tab	J Ref.	A Ref.
-06	G3	T3	.367	.90
-08	G3	T3	.367	.90
-3	G3	T3	.367	.90
-4	G6	T6	.467	.90
-5	G6	T6	.467	.90
-6	G9	T9	.591	1.13

Table 2 — For D1835

Insert First Dash Number	Aligning Tool	Installation Tab	J Ref.	A Ref.
-08	G7	T7	.500	.90
-3	G7	T7	.500	.90
-4	G9	T9	.591	1.13
-5	G10	T10	.655	1.13
-6	G11	T11	.718	1.13

Table 3 — For D1836

Insert First Dash Number	Aligning Tool	Installation Tab	J Ref.	A Ref.
-06	G2	T2	.358	.90
-08	G2	T2	.358	.90
-3	G2	T2	.358	.90
-4	G4	T4	.405	.90

Notes:

- Material and Finish:
Aligning Tool Handle: Aluminum Alloy, Anodized per MIL-A-8625
Aligning Tool Pins: CRES, Passivated per QQ-P-35
Installation Tab: Adhesive-Backed Aluminum Alloy or Plastic
- Example of Part Numbers:
D1837G3: Aligning tool for D1832, D1833 and D1834 insert in sizes -06, -08 and -3.
D1837T7: Installation tab for D1835 inserts in sizes -08 and -3
- (1) Installation tabs are furnished with inserts as specified on the applicable standard. Use this standard to order additional tabs only.

Installation and Tooling Selection

400 Series and D1800 (NAS 1800) Types

Panel Preparation

The following installation procedure pertains to most Delron potted-in type fasteners. Panels are prepared as illustrated in figures 1 and 2. Drill diameters for various types are shown in the tables below.

Installation Drill Diameters

400 Series

Size	Type H-HE	S-SE	SF-HF
440	.375	.344	-
632	.437	.406	.500
832	.500	.469	.562
1032	.500	.469	.562
428	.562	.531	.687
524	.687	.656	.812
624	.812	.781	.937

D1800 (NAS 1800) Series

Size	D1832, D1833, D1834	D1835	D1836
06	.561-.566	-	.452-.457
08	.561-.566	.686-.691	.452-.457
3	.561-.566	.686-.691	.452-.457
4	.686-.691	.749-.755	.499-.504
5	.686-.691	.811-.817	-
6	.842-.847	.874-.880	-

Bonding Procedure


Most blind applications for potted-in fasteners can use the "Pre-pot" technique. This involves filling the cavity nearly full, giving consideration to the displacement factor of an installed fastener. Sufficient potting material must be used to bond securely yet avoid overflow (Figure 3).

Fastener insertion is very simple using the Series 400 SF and 400S-SE which provide self-retention (Figure 4). Other head styles use tabs to position and hold the fastener in a flush, perpendicular position. Slots or holes in the tabs and insert head, allow additional potting material to be injected into the panel cavity (Figures 5 and 6).

Potting Material

Potting materials suitable for sandwich panel inserts are manufactured by companies such as American Cyanamid, Hexcel, Hysol™, BASF, Ciba-Geigy, etc. Information on type, setting time, and usage may be secure from them.

Installation Sequence

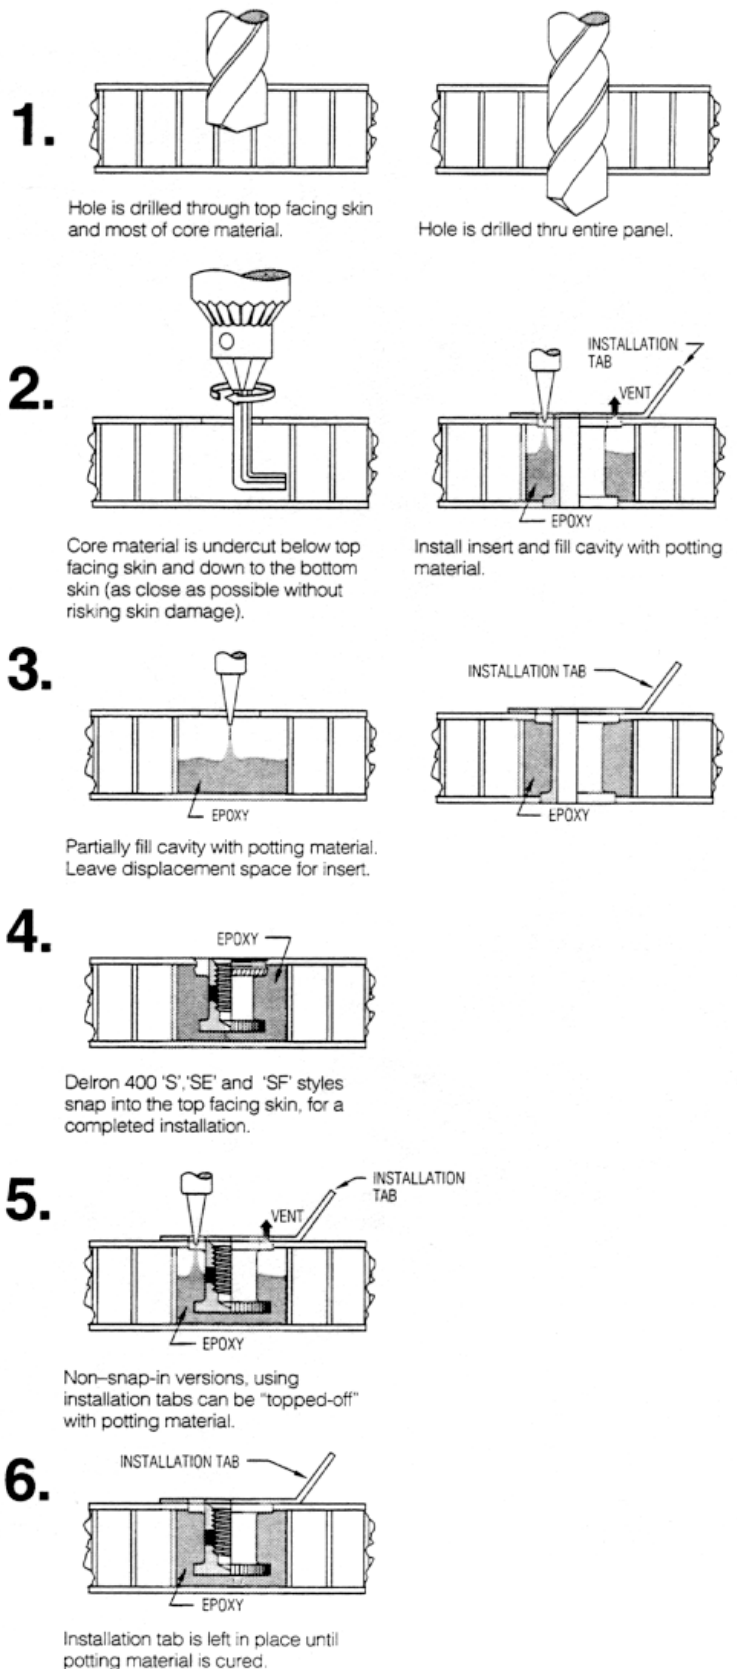

Delron Inserts 601 Series – Thru-Rivet

Style Selection

For Top Skin Thicknesses...	Less than .030"		.030" Minimum	
Head Style	D – Flush	C – Flush, Countersink	F – Non-Flush	FC – Non-Flush, Countersink Hole

Table 1

Size	Rivet Size	A Hole Dia.	B Sleeve Dia.	C Head Dia.	D Dia	E C'Sink Dia.
1	12 (1/8)	.133	.312	.500	.24	.233
2	15 (5/32)	.168	.375	.562	.27	.295
3	18 (3/16)	.194	.375	.562	.27	.362
4	25 (1/4)	.256	.500	.687	.40	.486
5	31 (5/16)	.318	.562	.750	.46	.574

Note:

1. Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Part Number Selection


Consult Rosán for availability of optional materials, finishes and sizes.

Example:

6 0 1 D 2-48-50

- Body Dash Number: Determined by Formula, (See Example on Sheet 2)
- Sleeve Dash Number = Core Thickness Rounded to the Nearest Hundredth of an Inch, (See Example on Sheet 2)
- Size: See Table 1
- Head Style: C = Flush, Countersink Hole
D = Flush Head
F = Non-Flush Head
FC = Non-Flush, Countersink Hole
- Type: Thru-Rivet
- Material: 0 = Aluminum Alloy: Body = 2024-T4 or T351 per QQ-A225/6
Sleeve = 6061-T6 per WW-T-700/6. Finish = Alodine per MIL-C-5541
6 = CRES Steel per ASTM-A-581/ASTM-A-582, AMS5640, AMS5639
Passivate per QQ-P-35
9 = Carbon Steel per ASTM-A-108/FED-STD-66, ASTM-A-519, Cadmium Plate per QQ-P-416, Type II, Class 2
- Series 600: Structural Type

Typical Assembly

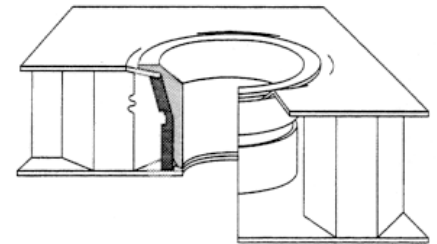

Typical Series 601, Thru-Rivet; Body and Sleeve assembly installed in honeycomb sandwich panel. Top panel skin is gripped between body and flared sleeve of insert for outstanding structural strength.

Note: For installation and tooling information, see pages 56 and 57.

601 Series – continued

Body and Sleeve Dash Number Selection

Sleeve Dash Number

Round *down* to the nearest hundredth of an inch of the panel core thickness (See Figs. 1).

Example: .489 Core Thickness, drop last digit to read -48.

Flush Head Styles	Non-Flush Head Styles
Note: For inspection, the actual sleeve length will be .010 to .015 shorter than the dash number called out. Example: -48 = .480, Actual Length = .465 to .470.	Note: For inspection, the actual sleeve length will be .020 longer than the dash number called out. Example: -48 = .480, Actual Length = .500.

Body Dash Number

1. Determine the Maximum Body Length (See Figs. 2) using the appropriate formula, below, based on Head Style.

Flush Head Styles	Non-Flush Head Styles
Overall Panel Thickness minus Bottom Skin Thickness minus .010 Springback Factor. Example: .750 - Overall Panel Thickness - .020 - Bottom Skin Thickness .730 - .010 - Springback Factor = .720 - Maximum Body Length	Core Thickness plus Top Skin Thickness minus .010 Springback Factor. Example: .690 - Core Thickness + .040 - Top Skin Thickness .730 - .010 - Springback Factor = .720 - Maximum Body Length


2. Select Body Dash Number from the table below based on Maximum Body Length determined in Step 1; round down to next lowest value.

Example: .720 Maximum Body Length = -70 Body Dash Number.

Body Dash Number	Maximum Body Length
-30	.335
-40	.350
-50	.450
-60	.550
-70	.650
-80	.750
-90	.850
-100	.950
-110	1.050
-120	1.150
-130	1.250
-140	1.350
-150	1.450

Fig. 1

Flush Head Style

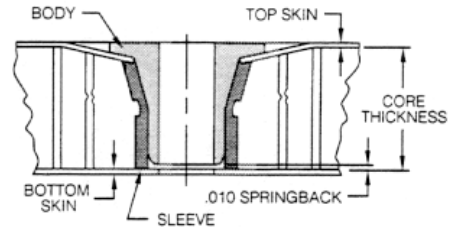

Non-Flush Head Style



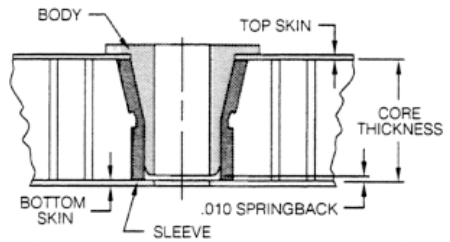


Fig. 2

Flush Head Style



Non-Flush Head Style



Delron Inserts 602 Series – Thru-Bolt

Style Selection

For Top Skin Thicknesses...	Less than .030"		.030" Minimum	
Head Style	D – Flush	C – Flush, Countersink	F – Non-Flush	FC – Non-Flush, Countersink Hole

Table 1

Size	Bolt Size	A Hole Dia.	B Sleeve Dia.	C Head Dia.	D Dia.	E C'Sink Dia.
1	6	.144	.312	.500	.24	.274
2	8	.168	.375	.562	.27	.332
3	10	.194	.375	.562	.27	.382
4	25	.256	.500	.687	.40	.505
5	31	.318	.562	.750	.46	.600
C5*	31	.318	.625	.875	.49	.635

*Dimensions apply to Flush style, countersink head versions only.

Note:

1. Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Part Number Selection


Consult Rosán for availability of optional materials, finishes and sizes.

Example:

6 0 2 D 2-48-50

- 6: Material: 0 = Aluminum Alloy: Body = 2024-T4 or T351 per QQ-A225/6; Sleeve = 6061-T6 per WW-T-700/6. Finish = Alodine per MIL-C-5541
- 0: Material: 6 = CRES Steel per ASTM-A-581/ASTM-A-582, AMS5640, AMS5639; Passivate per QQ-P-35
- 2: Material: 9 = Carbon Steel per ASTM-A-108/FED-STD-66, ASTM-A-519, Cadmium Plate per QQ-P-416, Type II, Class 2
- D: Head Style: C = Flush, Countersink Hole; D = Flush Head; F = Non-Flush Head; FC = Non-Flush, Countersink Hole
- 2-48-50: Body Dash Number: Determined by Formula, (See Example on Sheet 2); Sleeve Dash Number = Core Thickness Rounded to the Nearest Hundredth of an Inch, (See Example on Sheet 2); Size: See Table 1
- Thru-Bolt: Type: Thru-Bolt
- Series 600: Structural Type

Typical Assembly

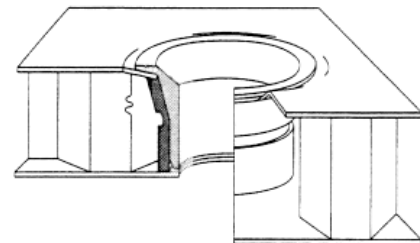

Typical Series 602, Thru-Bolt; Body and Sleeve assembly installed in honeycomb sandwich panel. Top panel skin is gripped between body and flared sleeve of insert for outstanding structural strength.

Note: For installation and tooling information, see pages 56 and 57.

602 Series – continued

Body and Sleeve Dash Number Selection

Sleeve Dash Number

Round *down* to the nearest hundredth of an inch of the panel core thickness (See Figs. 1).

Example: .489 Core Thickness, drop last digit to read -48.

Flush Head Styles	Non-Flush Head Styles
Note: For inspection, the actual sleeve length will be .010 to .015 shorter than the dash number called out. Example: -48 = .480, Actual Length = .465 to .470.	Note: For inspection, the actual sleeve length will be .020 longer than the dash number called out. Example: -48 = .480, Actual Length = .500.

Body Dash Number

1. Determine the Maximum Body Length (See Figs. 2) using the appropriate formula, below, based on Head Style.

Flush Head Styles	Non-Flush Head Styles
Overall Panel Thickness <i>minus</i> Bottom Skin Thickness <i>minus</i> .010 Springback Factor. Example: .750 - Overall Panel Thickness - .020 - Bottom Skin Thickness .730 - .010 - Springback Factor = .720 - Maximum Body Length	Core Thickness <i>plus</i> Top Skin Thickness <i>minus</i> .010 Springback Factor. Example: .690 - Core Thickness + .040 - Top Skin Thickness .730 - .010 - Springback Factor = .720 - Maximum Body Length


2. Select Body Dash Number from the table below based on Maximum Body Length determined in Step 1; round down to next lowest value.

Example: .720 Maximum Body Length = -70 Body Dash Number.

Body Dash Number	Maximum Body Length
-30	.335
-40	.350
-50	.450
-60	.550
-70	.650
-80	.750
-90	.850
-100	.950
-110	1.050
-120	1.150
-130	1.250
-140	1.350
-150	1.450

Fig. 1

Flush Head Style

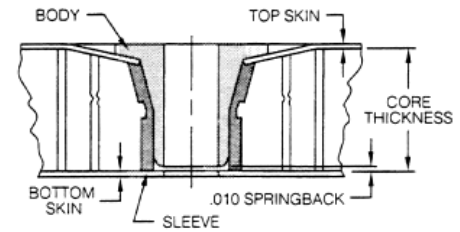

Non-Flush Head Style



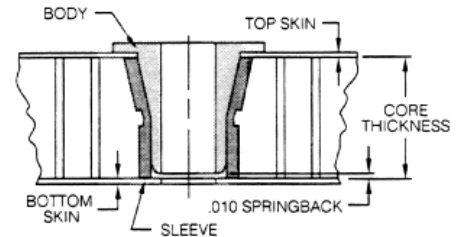


Fig. 2

Flush Head Style



Non-Flush Head Style



Delron Inserts 603 Series – Threaded

Style Selection

For Top Skin Thicknesses...	Less than .030"	.030" Minimum
Head Style	D-Flush	F-Non-Flush
	<p>Shown with Blind-Thread</p>	<p>Shown with Thru-Thread</p>

Table 1

Size	Thread Per MIL-S-8879	A Head Dia.	B Sleeve Dia.	C Dia.
1	.1380-32 UNJC-3B	.500	.312	.24
2	.1640-32 UNJC-3B	.562	.375	.27
3	.1900-32 UNJF-3B	.562	.375	.27
4	.2500-28 UNJF-3B	.687	.500	.40
5	.3125-24 UNJF-3B	.750	.562	.46
6	.3750-24 UNJF-3B	.875	.625	.49

Note:

1. Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Part Number Selection


Consult Rosán for availability of optional materials, finishes and sizes.

Example:

6 0 3 D 3-48-50

- 6: Series 600: Structural Type
- 0: Material: 0 = Aluminum Alloy: Body = 2024-T4 or T351 per QQ-A225/6
Sleeve = 6061-T6 per WW-T-700/6. Finish = Alodine per MIL-C-5541
- 3: Size: See Table 1
- D: Head Style: D = Flush Head
F = Non-Flush Head
- 3-48-50: Type: Threaded
Sleeve Dash Number = Core Thickness Rounded to the Nearest Hundredth of an Inch, (See Example on Sheet 2)
Add "T" When Thru-Thread is Required But is Not Standard, (See Table on Sheet 2)
Body Dash Number: Determined by Formula, (See Example on Sheet 2)

Typical Assembly

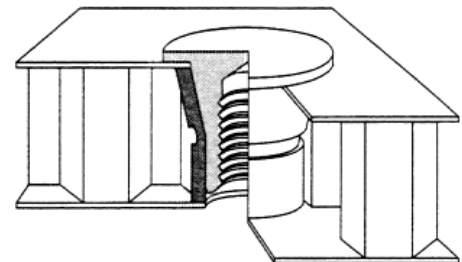

Typical Series 603, Threaded; Body and Sleeve assembly installed in honeycomb sandwich panel. Top panel skin is gripped between body and flared sleeve of insert for outstanding structural strength.

Note: For installation and tooling information, see pages 56 and 57.

603 Series – continued

Body and Sleeve Dash Number Selection

Sleeve Dash Number

Round *down* to the nearest hundredth of an inch of the panel core thickness (See Figs. 1).

Example: .489 Core Thickness, drop last digit to read -48.

D-Flush Head	F-Non-Flush Head
Note: For inspection, the actual sleeve length will be .010 to .015 shorter than the dash number called out. Example: -48 = .480, Actual Length = .465 to .470.	Note: For inspection, the actual sleeve length will be .020 longer than the dash number called out. Example: -48 = .480, Actual Length = .500.

Body Dash Number

1. Determine the Maximum Body Length (See Figs. 2) using the appropriate formula, below, based on Head Style.

D-Flush Head	F-Non-Flush Head
Overall Panel Thickness minus Bottom Skin Thickness minus .010 Springback Factor. Example: .750 - Overall Panel Thickness - .020 - Bottom Skin Thickness ----- .730 - .010 - Springback Factor ----- =.720 - Maximum Body Length	Core Thickness plus Top Skin Thickness minus .010 Springback Factor. Example: .690 - Core Thickness + .040 - Top Skin Thickness ----- .730 - .010 - Springback Factor ----- =.720 - Maximum Body Length

2. Select Body Dash Number from the table below based on Maximum Body Length determined in Step 1; round down to next lowest value.

Example: .720 Maximum Body Length = -70 Body Dash Number.

 = Minimum Full Thread Length  = Indicates Thru-Thread On Standard Parts











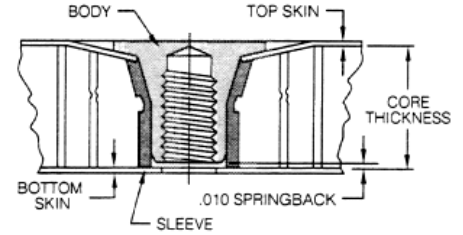
Body Dash Number	Maximum Body Length	Threaded Size					
		1	2	3	4	5	6
-30	.335	.165	.165				
-40	.350	.180	.180	.190			
-50	.450	.280	.280	.280	.270		
-60	.550	.280	.330	.380	.370	.350	
-70	.650	.280	.330	.380	.470	.450	.450
-80	.750	.280	.330	.380	.500	.550	.550
-90	.850	.280	.330	.380	.500	.625	.650
-100	.950	.280	.330	.380	.500	.625	.750
-110	1.050	.280	.330	.380	.500	.625	.750
-120	1.150	.280	.330	.380	.500	.625	.750
-130	1.250	.280	.330	.380	.500	.625	.750
-140	1.350	.280	.330	.380	.500	.625	.750
-150	1.450	.280	.330	.380	.500	.625	.750

Fig. 1
D Head Style



F Head Style



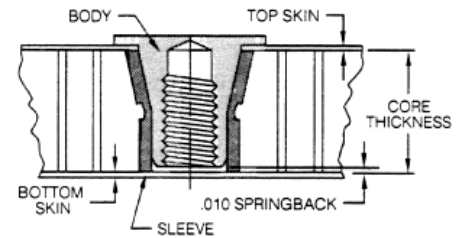


Fig. 2
D Head Style

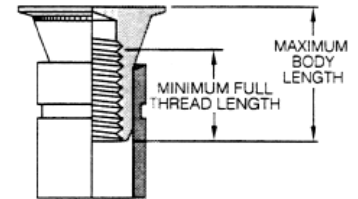

F Head Style



Delron Inserts 604 Series – Threaded with Non-Metallic Lock

Style Selection

For Top Skin Thicknesses...	Less than .030"	.030" Minimum
Head Style	D-Flush	F-Non-Flush
	<p>Shown with Blind-Thread</p>	<p>Shown with Thru-Thread</p>

Table 1

Size	Thread Per MIL-S-8879	A Head Dia.	B Sleeve Dia.	C Dia.
1	.1380-32 UNJC-3B	.500	.312	.24
2	.1640-32 UNJC-3B	.562	.375	.27
3	.1900-32 UNJF-3B	.562	.375	.27
4	.2500-28 UNJF-3B	.687	.500	.40
5	.3125-24 UNJF-3B	.750	.562	.46
6	.3750-24 UNJF-3B	.875	.625	.49

Note:

1. Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Part Number Selection


Consult Rosán for availability of optional materials, finishes and sizes.

Example:

6 0 4 D 3-48-50

- Body Dash Number: Determined by Formula, (See Example on Sheet 2)
- Add "T" When Thru-Thread is Required But is Not Standard, (See Table on Sheet 2)
- Sleeve Dash Number = Core Thickness Rounded to the Nearest Hundredth of an Inch, (See Example on Sheet 2)
- Size: See Table 1
- Head Style: D = Flush Head
F = Non-Flush Head
- Type: Threaded with Non-Metallic Lock, Torque per MIL-N-25027
- Material: 0 = Aluminum Alloy: Body = 2024-T4 or T351 per QQ-A225/6
Sleeve = 6061-T6 per WW-T-700/6. Finish = Alodine per MIL-C-5541
- 6 = CRES Steel per AMS5640, ASTM-A-581/ASTM-A-582, AMS5639
Passivate per QQ-P-35
- 9 = Carbon Steel per ASTM-A-108/FED-STD-66, ASTM-A-519, Cadmium Plate per QQ-P-416, Type II, Class 2
- Series 600: Structural Type

Typical Assembly

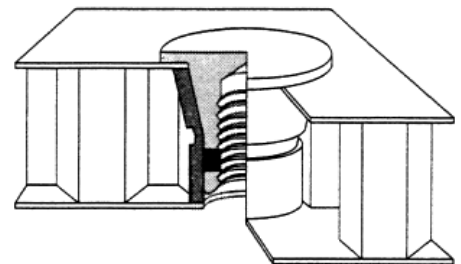

Typical Series 604, Threaded with Non-Metallic Lock; Body and Sleeve assembly installed in honeycomb sandwich panel. Top panel skin is gripped between body and flared sleeve of insert for outstanding structural strength.

Note: For installation and tooling information, see pages 56 and 57.

604 Series – continued

Body and Sleeve Dash Number Selection

Sleeve Dash Number

Round *down* to the nearest hundredth of an inch of the panel core thickness (See Figs. 1).

Example: .489 Core Thickness, drop last digit to read -48.

D - Flush Head	F - Non-Flush Head
Note: For inspection, the actual sleeve length will be .010 to .015 shorter than the dash number called out. Example: -48 = .480, Actual Length = .465 to .470.	Note: For inspection, the actual sleeve length will be .020 longer than the dash number called out. Example: -48 = .480, Actual Length = .500.

Body Dash Number

1. Determine the Maximum Body Length (See Figs. 2) using the appropriate formula, below, based on Head Style.

D - Flush Head	F - Non-Flush Head
Overall Panel Thickness minus Bottom Skin Thickness minus .010 Springback Factor. Example: .750 - Overall Panel Thickness - .020 - Bottom Skin Thickness .730 - .010 - Springback Factor = .720 - Maximum Body Length	Core Thickness plus Top Skin Thickness minus .010 Springback Factor. Example: .690 - Core Thickness + .040 - Top Skin Thickness .730 - .010 - Springback Factor = .720 - Maximum Body Length

2. Select Body Dash Number from the table below based on Maximum Body Length determined in Step 1; round down to next lowest value.

Example: .720 Maximum Body Length = -70 Body Dash Number.

 = Minimum Full Thread Length  = Indicates Thru-Thread On Standard Parts





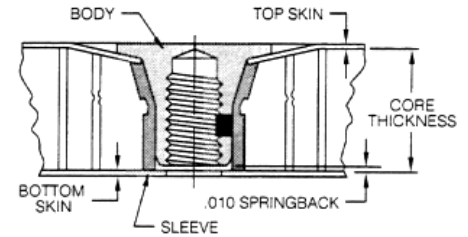
Body Dash Number	Maximum Body Length	Threaded Size					
		1	2	3	4	5	6
-30	.335	.165	.165				
-40	.350	.180	.180	.190			
-50	.450	.280	.280	.280	.270		
-60	.550	.280	.330	.380	.370	.350	
-70	.650	.280	.330	.380	.470	.450	.450
-80	.750	.280	.330	.380	.500	.550	.550
-90	.850	.280	.330	.380	.500	.625	.650
-100	.950	.280	.330	.380	.500	.625	.750
-110	1.050	.280	.330	.380	.500	.625	.750
-120	1.150	.280	.330	.380	.500	.625	.750
-130	1.250	.280	.330	.380	.500	.625	.750
-140	1.350	.280	.330	.380	.500	.625	.750
-150	1.450	.280	.330	.380	.500	.625	.750

Fig. 1
D Head Style



F Head Style



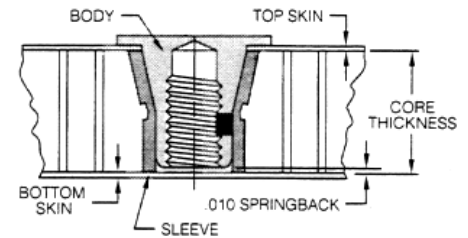


Fig. 2
D Head Style

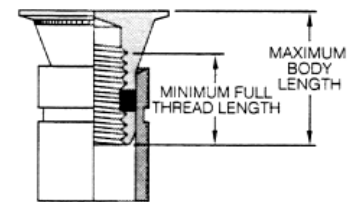

F Head Style



Delron Inserts 606 Series – Threaded with Self-Locking Helical Coil Insert

Style Selection

For Top Skin Thicknesses...	Less than .030"	.030" Minimum
Head Style	D-Flush	F-Non-Flush
	<p>Shown with Thru-Thread</p>	<p>Shown with Blind-Thread</p>

Table 1

Size	Thread Per MIL-S-8879	A Head Dia.	B Sleeve Dia.	C Dia.
1	.1380-32 UNJC-3B	.500	.312	.24
2	.1640-32 UNJC-3B	.562	.375	.27
3	.1900-32 UNJF-3B	.625	.437	.33
4	.2500-28 UNJF-3B	.687	.500	.40
5	.3125-24 UNJF-3B	.750	.562	.46
6	.3750-24 UNJF-3B	.875	.625	.49

Note:

1. Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Part Number Selection

Consult Rosán for availability of optional materials, finishes and sizes.


Example:

6 0 6 D 3-48- 50

- 6: Series 600: Structural Type
- 0: Material: 0 = Aluminum Alloy: Body = 2024T4 or T351 per QQ-A225/6. Sleeve = 6061-T6 per WW-T-700/6. Finish: = Alodine per MIL-C-5541.
- 6: 6 = CRES per ASTM-A-581, ASTM-A-582, AMS5640, AMS5639. Passivate per QQ-P-35.
- 9 = Carbon Steel per ASTM-A-108, FED-STD-66,ASTM-A-519, Cadmium Plate per QQ-P-416, Type II, Class 2.
- 3: Size: See Table 1
- D: Head Style: D = Flush, Head F = Non-Flush Head
- 48: Sleeve Dash Number = Core Thickness Rounded to the Nearest Hundredth of an Inch, (See Example on Sheet 2)
- 50: Body Dash Number: Determined by Formula, (See Example on Sheet 2)

Type: Threaded, All-Metal, with Self-Locking Helical Coil Insert Per MS21209

Typical Assembly

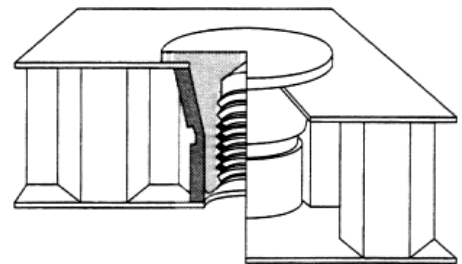

Typical Series 606, Threaded with Self-Locking Helical Coil Insert; Body and Sleeve assembly installed in honeycomb sandwich panel. Panel skin is gripped between body and flared sleeve of insert for outstanding structural strength.

Note: For installation and tooling information, see pages 56 and 57.

606 Series – continued

Body and Sleeve Dash Number Selection

Sleeve Dash Number

Round down to the nearest hundredth of an inch of the panel core thickness (See Figs. 1).

Example: .489 Core Thickness, drop last digit to read -48.

D - Flush Head	F - Non-Flush Head
Note: For inspection, the actual sleeve length will be .010 to .015 shorter than the dash number called out. Example: -48 = .480, Actual Length = .465 to .470.	Note: For inspection, the actual sleeve length will be .020 longer than the dash number called out. Example: -48 = .480, Actual Length = .500.

Body Dash Number

1. Determine the Maximum Body Length (See Figs. 2) using the appropriate formula, below, based on Head Style.

D - Flush Head	F - Non-Flush Head
Overall Panel Thickness minus Bottom Skin Thickness minus .010 Springback Factor. Example: .750 - Overall Panel Thickness -.020 - Bottom Skin Thickness = .730 -.010 - Springback Factor = .720 - Maximum Body Length	Core Thickness plus Top Skin Thickness minus .010 Springback Factor. Example: .690 - Core Thickness +.040 - Top Skin Thickness = .730 -.010 - Springback Factor = .720 - Maximum Body Length


2. Select Body Dash Number from the table below based on Maximum Body Length determined in Step 1; round down to next lowest value.

Example: .720 Maximum Body Length = -70 Body Dash Number.

= Minimum Full Thread Length
 = Indicates Thru-Thread On Standard Parts

Body Dash Number	Maximum Body Length	Thread Size							
		1	2	3	4	5		6	
						D HEAD	F HEAD	D HEAD	F HEAD
-30	.335								
-40	.350							N.A.	N.A.
-50	.450	.276	.246	.285	.250				
-60	.550	.276	.328	.380	.250	.312	.312		
-70	.650	.276	.328	.380	.500	.312	.312		.375
-80	.750	.276	.328	.380	.500	.468	.468	.375	.375
-90	.850	.276	.328	.380	.500	.468	.625	.562	.562
-100	.950	.276	.328	.380	.500	.625	.625	.562	.750
-110	1.050	.276	.328	.380	.500	.625	.625	.750	.750
-120	1.150	.276	.328	.380	.500	.625	.625	.750	.750
-130	1.250	.276	.328	.380	.500	.625	.625	.750	.750
-140	1.350	.276	.328	.380	.500	.625	.625	.750	.750
-150	1.450	.276	.328	.380	.500	.625	.625	.750	.750

Fig. 1
D Head Style

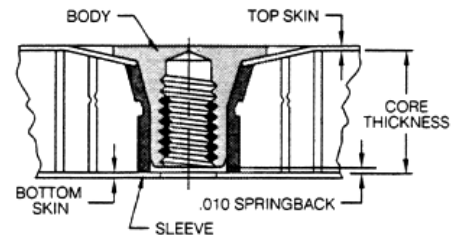

F Head Style



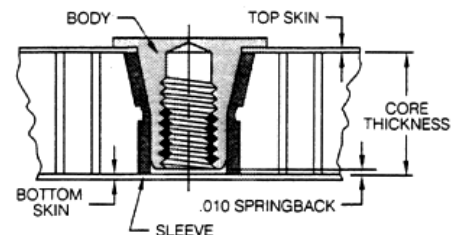


Fig. 2
D Head Style

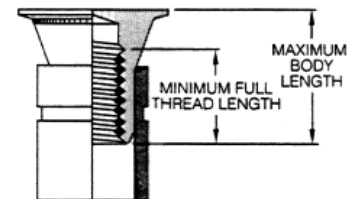

F Head Style



Installation and Tooling Selection

600 Series, Structural Type

The characteristic design of this series will retain the fastener in the panel until time of assembly. Knurls under the head of the body of these internally threaded fasteners, grip the cover sheet and act as an anti-rotation feature.

Panel Preparation

Requires the following:


1. A two diameter hole through the panel.
2. A drill-counterbore combination or singly, or a step drill to standard diameters. See table below.
3. Access to both sides of the panel.
4. Residual core and bondline material must be removed to allow the sleeve to seat on the bottom skin.

Installation Drill Diameters

Fastener Size	1	2	3	4	5	6
"A" Pilot Drill Fig.1 $\begin{smallmatrix} +.005 \\ -.000 \end{smallmatrix}$.140	.166	.190	.257	.316	.377
"B" C'BORE Fig.2 $\begin{smallmatrix} +.010 \\ -.000 \end{smallmatrix}$.312	.375	.375	.500	.562	.625

Skin Thickness to .032":

Skin Thickness Greater Than .032":

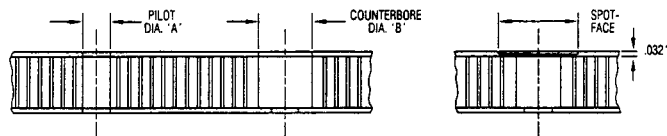

Panel cover sheets up to .032" will dimple automatically to obtain a flush head condition. Thicker sheets may either require the use of the non-flush head style fastener, or if flushness is required, predimping or spotfacing is common practice in the industry.






Fastener Installation

The most commonly used method, and that which is recommended, is the use of ram type equipment, such as an arbor press or hydraulic press.

1. Position fastener in prepared hole.
2. Select tools from Installation Tool Chart (Opposite).
3. With tools in place, apply pressure to head of fastener. Press body of insert into sleeve until head is flush with panel surface ('C' or 'D' head style) or until head is down against panel surface ('F' head style).
4. Release pressure and fastener is now completely installed. Since the head diameter of the fastener has the greatest area of contact, it may cause a slight spring back condition. However, when the component is bolted to the panel, the fastener will again become flush.

One time setting of insert is critical to a good installation. Do not 'bump' to set flush. Spring back is inherent in the panel and multiple resets of the insert results in a loose body. If within .015 or flush pull the head to flush by attaching the component part.

Installation Sequence

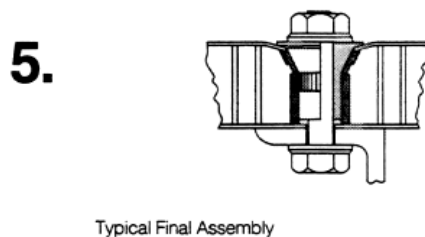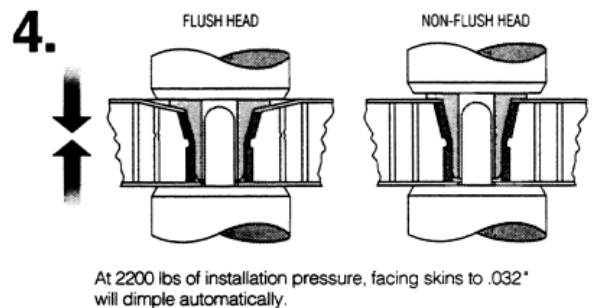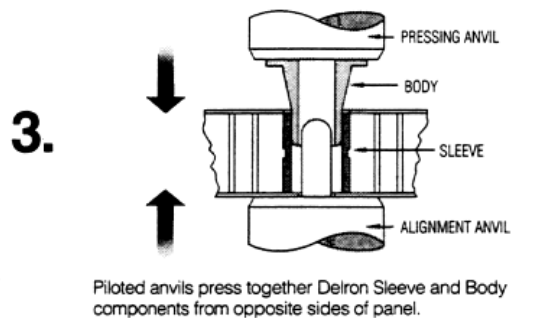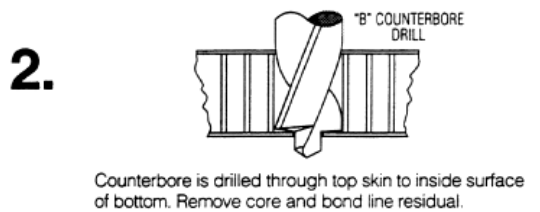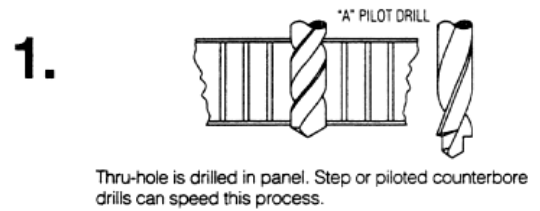


Tooling Part Numbers

Example: Insert Part Number 603D-48-50 requires Tool Kit Part Number: 1617-3


Fastener Series	Tool Kit Number	Consisting of:	
		Pressing Anvil	Alignment Anvil
601(*)1	1612	1612-1	1912-2
602(*)1	1613	1613-1	1613-2
601(*)2	1614-2	1614-2-1	1614-2-2
602(*)2			
601(*)3	1614-3	1614-3-1	1614-3-2
602(*)3			
601(*)4	1614-4	1614-4-1	1614-4-2
602(*)4			
601(*)5	1614-5	1614-5-1	1614-5-2
602(*)5			
601(*)6	1614-6	1614-6-1	1614-6-2
602(*)6			
601C1	1615-1	1615-1-1	1612-2
601C2	1615-2	1615-2-1	1614-2-2
601C3	1615-3	1615-3-1	1614-3-2
601C4	1615-4	1615-4-1	1614-4-2
601C5	1615-5	1615-5-1	1614-5-2
601C6	1675	1675-1	1614-6-2
602C1	1616-1	1616-1-1	1613-2
602C2	1616-2	1616-2-1	1614-2-2
602C3	1616-3	1616-3-1	1614-3-2
602C4	1616-4	1616-4-1	1614-4-2
602C5	1616-5	1616-5-1	1614-5-2
602C6	1616-6	1616-6-1	1614-6-2
603(*)1	1617-1	1613-1	1617-1-2
604(*)1			
603-2	1617-2	1614-2-1	1617-2-2
604(*)2			
603(*)3	1617-3	1614-3-1	1617-3-2
604(*)3			
603(*)4	1617-4	1614-4-1	1617-4-2
604(*)4			
603(*)5	1617-5	1614-5-1	1617-5-2
604(*)5			
603(*)6	1617-6	1614-6-1	1617-6-2
604(*)6			

(*) Fill in "D" or "F"


Pressing Anvils For 'D' & 'F' Style Heads




Pressing Anvil For 'C' Style Heads



Alignment Anvils For Thru Hole Type Fasteners



Spring Loaded Alignment Anvils For Threaded Type Fasteners



Delron Inserts

601 Series – Flared Thru-Rivet

Style Selection

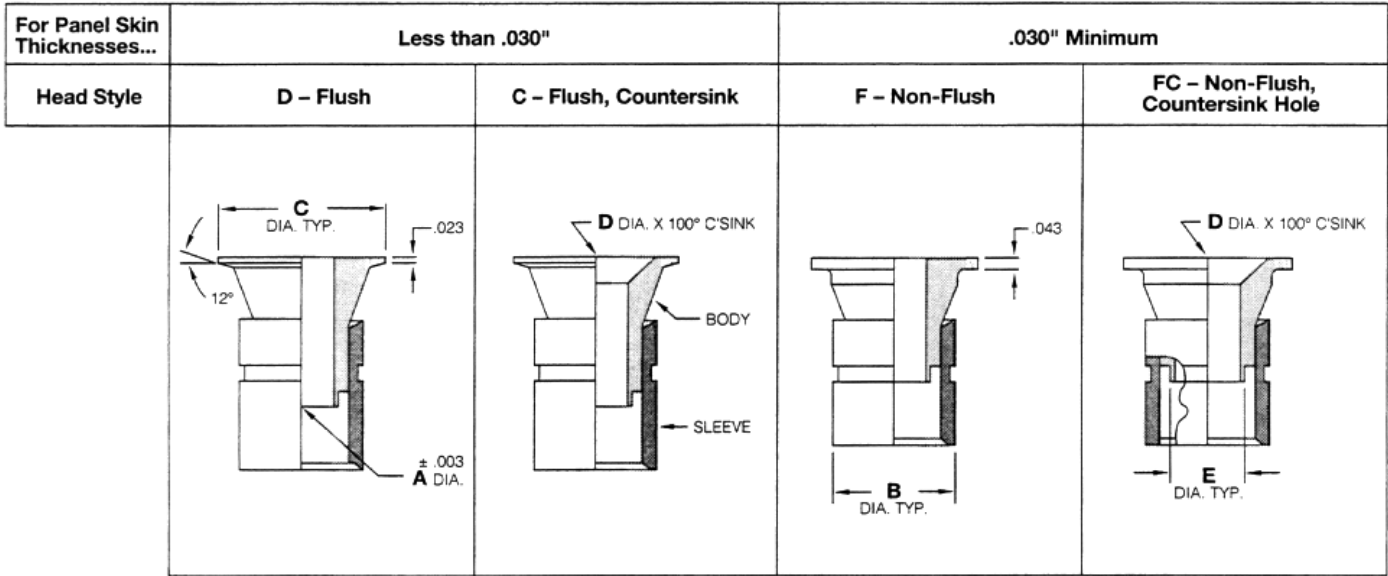


Table 1

Size	Rivet Size	A Hole Dia.	B Sleeve Dia.	C Head Dia.	D C'Sink Dia	E Flare Dia.
0	8 (3/32)	.103	.250	.375	.192	.148
1	12 (1/8)	.133	.312	.500	.233	.174
2	15 (5/32)	.168	.375	.562	.295	.225
3	18 (3/16)	.194	.375	.562	.362	.225
4	25 (1/4)	.256	.500	.687	.486	.290
5	31 (5/16)	.318	.562	.750	.574	.356
6	37 (3/8)	.381	.625	.875	*	.418

*Available upon request.

Part Number Selection

Consult Rosán for availability of optional materials, finishes and sizes.

Example:

6 0 1 D 2-49 F52


- 6: Series
- 0: Material
- 1: Type
- D: Head Style
- 2-49: Size
- F52: Body Number

Body Number: See Table 2
 Sleeve Dash Number = Core Thickness Rounded to the Nearest Hundredth of an Inch, (See Example on Sheet 2)
 Size: See Table 1
 Head Style: C = Flush, Countersink Hole
 D = Flush Head
 F = Non-Flush Head
 FC = Non-Flush, Countersink Hole
 Type: Thru-Rivet
 Material: 0 = Aluminum Alloy; Body = 2024T4 or T351 per QQ-A225/6.
 Sleeve = 6061-T6 per WW-T-700/6. Finish: = Alodine per MIL-C-5541.
 6 = CRES per ASTM-A-581, ASTM-A-582, AMS5640, AMS5639
 Passivate per QQ-P-35.
 9 = Carbon Steel per ASTM-A-108, FED-STD-66, ASTM-A-519,
 Cadmium Plate per QQ-P-416, Type II, Class 2.
 Series 600: Flared Structural Type

Note:

1. Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Typical Assembly

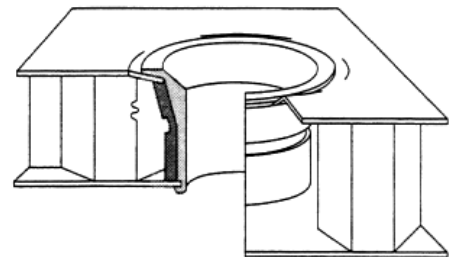

Typical Series 601, Flared Thru-Rivet; Body and Sleeve assembly installed in honeycomb sandwich panel. Both top and bottom panel skins are gripped between body and flared sleeve of insert for maximum structural strength.

Note: For installation and tooling information, see pages 68 and 69.

601 Flared Series - continued

Body and Sleeve Dash Number Selection

Sleeve Dash Number

Round *down* to the nearest hundredth of an inch of the panel core thickness (See Fig. 1).


Example: .489 Core Thickness, drop last digit to read -48.

Body Dash Number

Select Body Number from Table 2 according to Overall Panel Thickness.

Example: Overall Panel Thickness of .524 = F52 Body Number.

Fig. 1

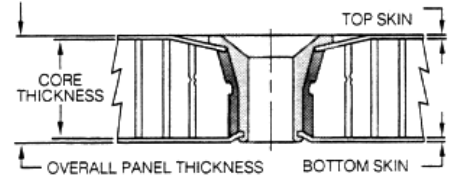

Notes:

1. Flush Head styles are not recommended for panel skin thicknesses greater than .030.
2. Non-Flush Head styles are to be used only with minimum panel skin thickness of .030.

Table 2

Body	Panel Thickness	Body	Panel Thickness	Body	Panel Thickness
F25	.250-.250	F51	.510-.519	F77	.770-.779
F26	.260-.269	F52	.520-.529	F78	.780-.789
F27	.270-.279	F53	.530-.539	F79	.790-.799
F28	.280-.289	F54	.540-.549	F80	.800-.809
F29	.290-.299	F55	.550-.559	F81	.810-.819
F30	.300-.309	F56	.560-.569	F82	.820-.829
F31	.310-.319	F57	.570-.579	F83	.830-.839
F32	.320-.329	F58	.580-.589	F84	.840-.849
F33	.330-.339	F59	.590-.599	F85	.850-.859
F34	.340-.349	F60	.600-.609	F86	.860-.869
F35	.350-.359	F61	.610-.619	F87	.870-.879
F36	.360-.369	F62	.620-.629	F88	.880-.889
F37	.370-.379	F63	.630-.639	F89	.890-.899
F38	.380-.389	F64	.640-.649	F90	.900-.909
F39	.390-.399	F65	.650-.659	F91	.910-.919
F40	.400-.409	F66	.660-.669	F92	.920-.929
F41	.410-.419	F67	.670-.679	F93	.930-.939
F42	.420-.429	F68	.680-.689	F94	.940-.949
F43	.430-.439	F69	.690-.699	F95	.950-.959
F44	.440-.449	F70	.700-.709	F96	.960-.969
F45	.450-.459	F71	.710-.719	F97	.970-.979
F46	.460-.469	F72	.720-.729	F98	.980-.989
F47	.470-.479	F73	.730-.739	F99	.990-.999
F48	.480-.489	F74	.740-.749	F100	1.000-1.009
F49	.490-.499	F75	.750-.759	F101	1.010-1.019
F50	.500-.509	F76	.760-.769	F102	1.020-1.029

Delron Inserts

602 Series – Flared Thru-Bolt

Style Selection

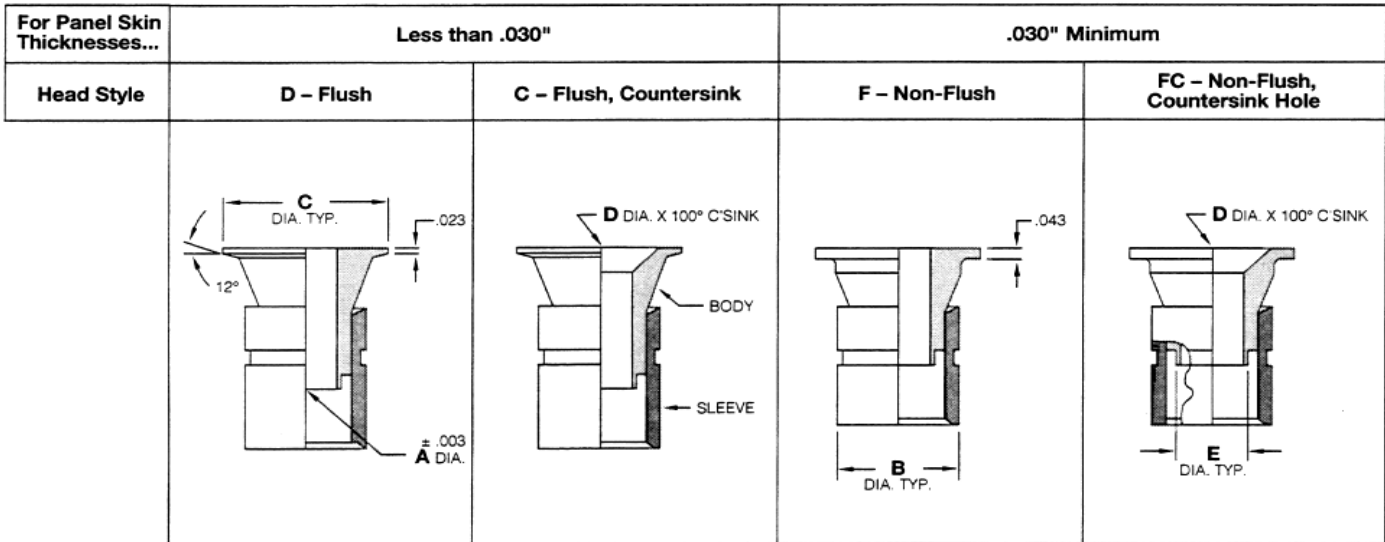


Table 1

Size	Bolt Size	A Hole Dia.	B Sleeve Dia.	C Head Dia.	D C'Sink Dia.	E Flare Dia.
0	4	.117	.250	.375	.220	.148
1	6	.144	.312	.500	.274	.174
2	8	.168	.375	.562	.332	.225
3	10	.194	.375	.562	.382	.225
4	25	.256	.500	.687	.505	.290
5	31	.318	.562	.750	*	.356
6	37	.381	.625	.875	*	.418

*Available upon request.

Part Number Selection

Consult Rosán for availability of optional materials, finishes and sizes.

Example:

6 0 2 D 2-49 F52

- Body Number: See Table 2
- Sleeve Dash Number = Core Thickness Rounded to the Nearest Hundredth of an Inch, (See Example on Sheet 2)
- Size: See Table 1
- Head Style: C = Flush, Countersink Hole
D = Flush Head
F = Non-Flush Head
FC = Non-Flush, Countersink Hole
- Type: Thru-Bolt


- Material: 0 = Aluminum Alloy: Body = 2024T4 or T351 per QQ-A225/6.
Sleeve = 6061-T6 per WW-T-700/6. Finish = Alodine per MIL-C-5541.
- 6 = CRES per ASTM-A-581, ASTM-A-582, AMS5640, AMS5639.
Passivate per QQ-P-35.
- 9 = Carbon Steel per ASTM-A-108, FED-STD-66, ASTM-A-519,
Cadmium Plate per QQ-P-416, Type II, Class 2.

Series 600: Flared Structural Type

Note:

1. Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Typical Assembly

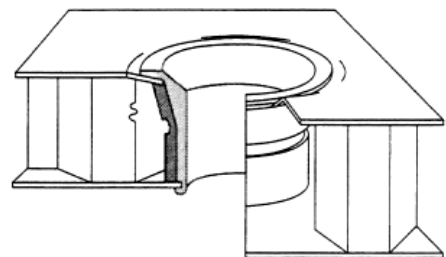

Typical Series 602, Flared Thru-Bolt; Body and Sleeve assembly installed in honeycomb sandwich panel. Both top and bottom panel skins are gripped between body and flared sleeve of insert for maximum structural strength.

Note: For installation and tooling information, see pages 68 and 69.

602 Flared Series - continued

Body and Sleeve Dash Number Selection

Sleeve Dash Number

Round *down* to the nearest hundredth of an inch of the panel core thickness (See Fig. 1).


Example: .489 Core Thickness, drop last digit to read -48.

Body Dash Number

Select Body Number from Table 2 according to Overall Panel Thickness.

Example: Overall Panel Thickness of .524 = F52 Body Number.

Fig.1

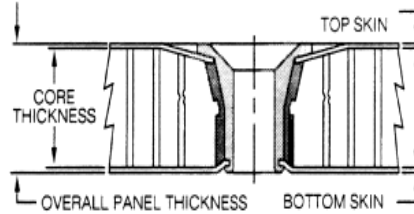

Notes:

1. Flush Head styles are not recommended for panel skin thicknesses greater than .030.
2. Non-Flush Head styles are to be used only with minimum panel skin thickness of .030.

Table 2

Body	Panel Thickness
F25	.250-.259
F26	.260-.269
F27	.270-.279
F28	.280-.289
F29	.290-.299
F30	.300-.309
F31	.310-.319
F32	.320-.329
F33	.330-.339
F34	.340-.349
F35	.350-.359
F36	.360-.369
F37	.370-.379
F38	.380-.389
F39	.390-.399
F40	.400-.409
F41	.410-.419
F42	.420-.429
F43	.430-.439
F44	.440-.449
F45	.450-.459
F46	.460-.469
F47	.470-.479
F48	.480-.489
F49	.490-.499
F50	.500-.509

Body	Panel Thickness
F51	.510-.519
F52	.520-.529
F53	.530-.539
F54	.540-.549
F55	.550-.559
F56	.560-.569
F57	.570-.579
F58	.580-.589
F59	.590-.599
F60	.600-.609
F61	.610-.619
F62	.620-.629
F63	.630-.639
F64	.640-.649
F65	.650-.659
F66	.660-.669
F67	.670-.679
F68	.680-.689
F69	.690-.699
F70	.700-.709
F71	.710-.719
F72	.720-.729
F73	.730-.739
F74	.740-.749
F75	.750-.759
F76	.760-.769

Body	Panel Thickness
F77	.770-.779
F78	.780-.789
F79	.790-.799
F80	.800-.809
F81	.810-.819
F82	.820-.829
F83	.830-.839
F84	.840-.849
F85	.850-.859
F86	.860-.869
F87	.870-.879
F88	.880-.889
F89	.890-.899
F90	.900-.909
F91	.910-.919
F92	.920-.929
F93	.930-.939
F94	.940-.949
F95	.950-.959
F96	.960-.969
F97	.970-.979
F98	.980-.989
F99	.990-.999
F100	1.000-1.009
F101	1.010-1.019
F102	1.020-1.029

Delron Inserts

603 Series - Flared Threaded

Style Selection

For Top Skin Thicknesses...	Less than .030"	.030" Minimum
Head Style	D-Flush	F-Non-Flush
	<p>Shown with Blind-Thread</p>	<p>Shown with Thru-Thread</p>

Table 1

Size	Thread Per MIL-S-8879	A HeadDia.	B SleeveDia.	C FlareDia.
0	.1120-40 UNJC-3B	.375	.250	.148
1	.1380-32 UNJC-3B	.500	.312	.174
2	.1640-32 UNJC-3B	.562	.375	.225
3	.1900-32 UNJF-3B	.562	.375	.225
4	.2500-28 UNJF-3B	.687	.500	.290
5	.325-24 UNJF-3B	.750	.562	.356
6	.3750-24 UNJF-3B	.875	.625	.418

Note:

1. Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Part Number Selection

Consult Rosán for availability of optional materials, finishes and sizes.


Example:

6 0 3 D 3-49 FT52

- 6 = Material: 0 = Aluminum Alloy: Body = 2024T4 or T351 per QQ-A225/6. Sleeve = 6061-T6 per WW-T-700/6. Finish: = Alodine per MIL-C-5541.
- 0 = CRES per ASTM-A-581, ASTM-A-582, AMS5640, AMS5639. Passivate per QQ-P-35.
- 3 = Carbon Steel per ASTM-A-108, FED-STD-66, ASTM-A-519, Cadmium Plate per QQ-P-416, Type II, Class 2.
- D = Head Style: D = Flush Head, F = Non-Flush Head
- 3 = Size: See Table 1
- 49 = Sleeve Dash Number = Core Thickness Rounded to the Nearest Hundredth of an Inch (See Example on Sheet 2)
- FT52 = Body Number (See Table 2. Add "T" as Shown When Thru-Thread is Required but is Not Standard)

Series 600: Flared Structural Type

Typical Assembly

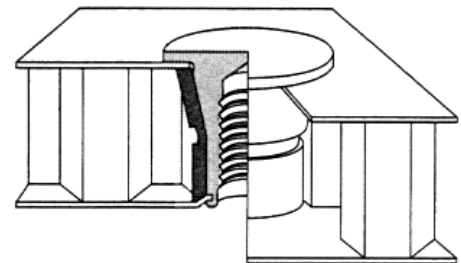

Typical Series 603, Flared Threaded; Body and Sleeve; assembly installed in honeycomb sandwich panel. Both top and bottom skins are gripped between body and flared sleeve of insert for maximum structural strength.

Note: For installation and tooling information, see pages 68 and 69.

603 Flared Series - continued

Body and Sleeve Dash Number Selection

Sleeve Dash Number

Round *down* to the nearest hundredth of an inch of the panel core thickness (See Fig. 1).

Example: .489 Core Thickness, drop last digit to read -48.


Body Dash Number

Select Body Number from Table 2 according to Overall Panel Thickness.

Example: Overall Panel Thickness of .524 = F52 Body Number.

= Thru-Hole Thread
 = Minimum Full Thread Length
 = Not Available

Fig. 1

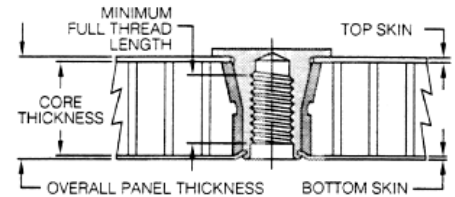

Notes:

1. Flush Head styles are not recommended for panel skin thicknesses greater than .030.
2. Non-Flush Head styles are to be used only with minimum panel skin thickness of .030.

Table 2

Body Dash No.	Panel Thickness	(Thread Size (See Table 1))							
		0	1	2	3	4	5	6	
F25	.250-.259						-	-	
F26	.260-.269						-	-	
F27	.270-.279						-	-	
F28	.280-.289						-	-	
F29	.290-.299						-	-	
F30	.300-.309						-	-	
F31	.310-.319						-	-	
F32	.320-.329						-	-	
F33	.330-.339						-	-	
F34	.340-.349						-	-	
F35	.350-.359						-	-	
F36	.360-.369						-	-	
F37	.370-.379	.164					-	-	
F38	.380-.389	.174					-	-	
F39	.390-.399	.184					-	-	
F40	.400-.409	.194					-	-	
F41	.410-.419	.204					-	-	
F42	.420-.429	.214	.206					-	
F43	.430-.439	.224	.216					-	
F44	.440-.449	↑	.226					-	
F45	.450-.459	↑	.236					-	
F46	.460-.469	↑	.246					-	
F47	.470-.479	↑	.256	.248				-	
F48	.480-.489	↑	.266	.258				-	
F49	.490-.499	↑	.276	.268				-	
F50	.500-.509	↑	↑	.278	.270			-	
F51	.510-.519	↑	↑	.288	.280			-	
F52	.520-.529	↑	↑	.298	.290			-	
F53	.530-.539	↑	↑	.308	.300			-	
F54	.540-.549	↑	↑	.318	.310			-	
F55	.550-.559	↑	↑	.328	.320			-	
F56	.560-.569	↑	↑	↑	.330			-	
F57	.570-.579	↑	↑	↑	.340			-	
F58	.580-.589	↑	↑	↑	.350			-	
F59	.590-.599	↑	↑	↑	.360			-	
F60	.600-.609	↑	↑	↑	.370			-	
F61	.610-.619	↑	↑	↑	.380			-	
F62	.620-.629	↑	↑	↑	↑	.380		-	
F63	.630-.639	↑	↑	↑	↑	.390		-	
F64	.640-.649	↑	↑	↑	↑	.400		-	
F65	.650-.659	↓	↓	↓	↓	.410	-	-	

Body Dash No.	Panel Thickness	(Thread Size (See Table 1))							
		0	1	2	3	4	5	6	
F66	.660-.669	↑	↑	↑	↑	.420	-	-	
F67	.670-.679	↑	↑	↑	↑	.430	-	-	
F68	.680-.689	↑	↑	↑	↑	.440	-	-	
F69	.690-.699	↑	↑	↑	↑	.450	-	-	
F70	.700-.709	↑	↑	↑	↑	.460	-	-	
F71	.710-.719	↑	↑	↑	↑	.470	-	-	
F72	.720-.729	↑	↑	↑	↑	.480	-	-	
F73	.730-.739	↑	↑	↑	↑	.490	.464	-	
F74	.740-.749	↑	↑	↑	↑	.500	.474	-	
F75	.750-.759	↑	↑	↑	↑	↑	.484	-	
F76	.760-.769	↑	↑	↑	↑	↑	.494	-	
F77	.770-.779	↑	↑	↑	↑	↑	.504	-	
F78	.780-.789	↑	↑	↑	↑	↑	.514	-	
F79	.790-.799	↑	↑	↑	↑	↑	.524	-	
F80	.800-.809	↑	↑	↑	↑	↑	.534	-	
F81	.810-.819	↑	↑	↑	↑	↑	.544	-	
F82	.820-.829	↑	↑	↑	↑	↑	.554	-	
F83	.830-.839	↑	↑	↑	↑	↑	.564	-	
F84	.840-.849	↑	↑	↑	↑	↑	.574	-	
F85	.850-.859	↑	↑	↑	↑	↑	.584	.560	
F86	.860-.869	↑	↑	↑	↑	↑	.594	.570	
F87	.870-.879	↑	↑	↑	↑	↑	.604	.580	
F88	.880-.889	↑	↑	↑	↑	↑	.614	.590	
F89	.890-.899	↑	↑	↑	↑	↑	.624	.600	
F90	.900-.909	↑	↑	↑	↑	↑	↑	.610	
F91	.910-.919	↑	↑	↑	↑	↑	↑	.620	
F92	.920-.929	↑	↑	↑	↑	↑	↑	.630	
F93	.930-.939	↑	↑	↑	↑	↑	↑	.640	
F94	.940-.949	↑	↑	↑	↑	↑	↑	.650	
F95	.950-.959	↑	↑	↑	↑	↑	↑	.660	
F96	.960-.969	↑	↑	↑	↑	↑	↑	.670	
F97	.970-.979	↑	↑	↑	↑	↑	↑	.680	
F98	.980-.989	↑	↑	↑	↑	↑	↑	.690	
F99	.990-.999	↑	↑	↑	↑	↑	↑	.700	
F100	1.000-1.009	↑	↑	↑	↑	↑	↑	.710	
F101	1.010-1.019	↑	↑	↑	↑	↑	↑	.720	
F102	1.020-1.029	↑	↑	↑	↑	↑	↑	.730	
F103	1.030-1.039	↑	↑	↑	↑	↑	↑	.740	
F104	1.040-1.049	↓	↓	↓	↓	↓	↓	.750	
& UP	1.050-1.059	↓	↓	↓	↓	↓	↓	.750	

Delron Inserts 604 Series - Flared Threaded with Non-Metallic Lock

Style Selection

For Top Skin Thicknesses...	Less than .030"	.030" Minimum
Head Style	D-Flush	F-Non-Flush
	<p>Shown with Blind-Thread</p>	<p>Shown with Thru-Thread</p>

Table 1

Size	Thread Per MIL-S-8879	A Head Dia.	B Sleeve Dia.	C Flare Dia.
0	.1120-40 UNJC-3B	.375	.250	.148
1	.1380-32 UNJC-3B	.500	.312	.174
2	.1640-32 UNJC-3B	.562	.375	.225
3	.1900-32 UNJF-3B	.562	.375	.225
4	.2500-28 UNJF-3B	.687	.500	.290
5	.3125-24 UNJF-3B	.750	.562	.356
6	.3750-24 UNJF-3B	.875	.625	.418

Note:

1. Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Part Number Selection

Consult Rosán for availability of optional materials, finishes and sizes.


Example:

6 0 4 D 3-49 FT52

- Body Number (See Table 2. Add "T" as Shown When Thru-Thread is Required but is Not Standard)
- Sleeve Dash Number = Core Thickness Rounded to the Nearest Hundredth of an Inch (See Example on Sheet 2)
- Size: See Table 1
- Head Style: D = Flush Head
F = Non-Flush Head
- Type: Threaded With Non-Metallic Lock
- Material: 0 = Aluminum Alloy: Body = 2024T4 or T351 per QQ-A225/6.
Sleeve = 6061-T6 per WW-T-700/6. Finish: = Alodine per MIL-C-5541.
- 6 = CRES per ASTM-A-581, ASTM-A-582, AMS5640, AMS5639.
Passivate per QQ-P-35.
- 9 = Carbon Steel per ASTM-A-108, FED-STD-66, ASTM-A-519,
Cadmium Plate per QQ-P-416, Type II, Class 2.

Series 600: Flared Structural Type

Typical Assembly

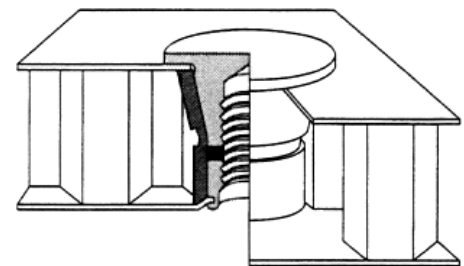

Typical Series 604, Flared Threaded with Non-Metallic Lock; Body and Sleeve; assembly installed in honeycomb sandwich panel. Both top and bottom skins are gripped between body and flared sleeve of insert for maximum structural strength.

Note: For installation and tooling information, see pages 68 and 69.

604 Flared Series - continued

Body and Sleeve Dash Number Selection

Sleeve Dash Number

Round down to the nearest hundredth of an inch of the panel core thickness (See Fig. 1).

Example: .489 Core Thickness, drop last digit to read -48.


Body Dash Number

Select Body Number from Table 2 according to Overall Panel Thickness.

Example: Overall Panel Thickness of .524 = F52 Body Number.

= Thru-Hole Thread
 = Minimum Full Thread Length
 = Not Available

Fig. 1

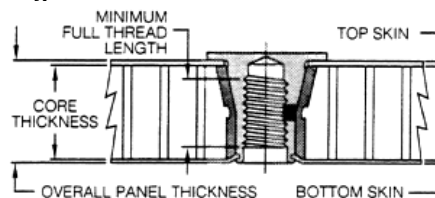

Notes:

1. Flush Head styles are not recommended for panel skin thicknesses greater than .030.
2. Non-Flush Head styles are to be used only with minimum panel skin thickness of .030.

Table 2

Body Dash No.	Panel Thickness	(Thread Size (See Table 1))						
		0	1	2	3	4	5	6
F25	.250-.259						-	-
F26	.260-.269						-	-
F27	.270-.279						-	-
F28	.280-.289						-	-
F29	.290-.299						-	-
F30	.300-.309						-	-
F31	.310-.319						-	-
F32	.320-.329						-	-
F33	.330-.339						-	-
F34	.340-.349						-	-
F35	.350-.359						-	-
F36	.360-.369						-	-
F37	.370-.379	.164					-	-
F38	.380-.389	.174					-	-
F39	.390-.399	.184					-	-
F40	.400-.409	.194					-	-
F41	.410-.419	.204					-	-
F42	.420-.429	.214	.206				-	-
F43	.430-.439	.224	.216				-	-
F44	.440-.449	↑	.226				-	-
F45	.450-.459	↑	.236				-	-
F46	.460-.469	↑	.246				-	-
F47	.470-.479	↑	.256	.248			-	-

Body Dash No.	Panel Thickness	(Thread Size (See Table 1))						
		0	1	2	3	4	5	6
F66	.660-.669	↑	↑	↑	↑	.420	-	-
F67	.670-.679					.430	-	-
F68	.680-.689					.440	-	-
F69	.690-.699					.450	-	-
F70	.700-.709					.460	-	-
F71	.710-.719					.470	-	-
F72	.720-.729					.480	-	-
F73	.730-.739					.490	.464	-
F74	.740-.749					.500	.474	-
F75	.750-.759					↑	.484	-
F76	.760-.769					↑	.494	-
F77	.770-.779					↑	.504	-
F78	.780-.789					↑	.514	-
F79	.790-.799					↑	.524	-
F80	.800-.809					↑	.534	-
F81	.810-.819					↑	.544	-
F82	.820-.829					↑	.554	-
F83	.830-.839					↑	.564	-
F84	.840-.849					↑	.574	-
F85	.850-.859					↑	.584	.560
F86	.860-.869					↑	.594	.570
F87	.870-.879					↑	.604	.580
F88	.880-.889					↑	.614	.590

F48	.480-.489	↑	.266	.258			-	-
F49	.490-.499	↑	.276	.268			-	-
F50	.500-.509	↑	.278	.270			-	-
F51	.510-.519	↑	.288	.280			-	-
F52	.520-.529	↑	.298	.290			-	-
F53	.530-.539	↑	.308	.300			-	-
F54	.540-.549	↑	.318	.310			-	-
F55	.550-.559	↑	.328	.320			-	-
F56	.560-.569	↑	↑	.330			-	-
F57	.570-.579	↑	↑	.340			-	-
F58	.580-.589	↑	↑	.350			-	-
F59	.590-.599	↑	↑	.360			-	-
F60	.600-.609	↑	↑	.370			-	-
F61	.610-.619	↑	↑	.380			-	-
F62	.620-.629	↑	↑	↑	.380		-	-
F63	.630-.639	↑	↑	↑	.390		-	-
F64	.640-.649	↑	↑	↑	.400		-	-
F65	.650-.659	↑	↑	↑	.410	-	-	-

F90	.900-.909						↑	.610
F91	.910-.919						↑	.620
F92	.920-.929						↑	.630
F93	.930-.939						↑	.640
F94	.940-.949						↑	.650
F95	.950-.959						↑	.660
F96	.960-.969						↑	.670
F97	.970-.979						↑	.680
F98	.980-.989						↑	.690
F99	.990-.999						↑	.700
F100	1.000-1.009						↑	.710
F101	1.010-1.019						↑	.720
F102	1.020-1.029						↑	.730
F103	1.030-1.039						↑	.740
F104	1.040-1.049	↓	↓	↓	↓	↓	↓	.750
& UP	1.050-1.059	.224	.276	.328	.380	.500	.624	.750

Delron Inserts

606 Series - Flared Threaded

with Self-Locking Helical Coil Insert

Style Selection

For Top Skin Thicknesses...	Less than .030"	.030" Minimum
Head Style	D - Flush	F - Non-Flush
	<p>Shown with Blind-Thread</p>	<p>Shown with Thru-Thread</p>

Table 1

Size	Thread Per MIL-S-8879	A Head Dia.	B Sleeve Dia.	C Dia
1	.1380-32 UNJC-3B	.562	.375	.225
2	.1640-32 UNJC-3B	.625	.437	.290
3	.1900-32 UNJF-3B	.625	.437	.290
4	.2500-28 UNJF-3B	.687	.500	.356
5	.3125-24 UNJF-3B	.750	.562	.418

Note:

1. Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Part Number Selection

Consult Rosán for availability of optional materials, finishes and sizes.


Example:

6 0 6 D 3-49 FT52

- 606: Body Number (See Table 2. Add "T" as Shown When Thru-Thread is Required but is Not Standard)
- D: Sleeve Dash Number = Core Thickness Rounded to the Nearest Hundredth of an Inch (See Example on Sheet 2)
- 3-49: Size: See Table 1
- FT52: Head Style: D = Flush Head, F = Non-Flush Head
- Type: Threaded, All Metal, With Self-Locking Helical Coil Insert per MS21209
- Material: 0 = Aluminum Alloy: Body = 2024T4 or T351 per QQ-A225/6, Sleeve = 6061-T6 per WW-T-700/6. Finish: = Alodine per MIL-C-5541.
- 6 = CRES per ASTM-A-581, ASTM-A-582, AMS5640, AMS5639. Passivate per QQ-P-35.
- 9 = Carbon Steel per ASTM-A-108, FED-STD-66, ASTM-A-519, Cadmium Plate per QQ-P-416, Type II, Class 2.

Series 600: Flared Structural Type

Typical Assembly

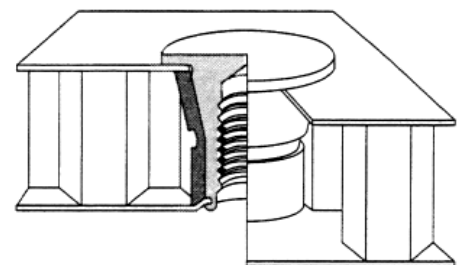

Typical Series 606 Flared, Threaded with Self-Locking Helical Coil Insert; Body and Sleeve assembly installed in honeycomb sandwich panel. Both top and bottom skins are gripped between body and flared sleeve of insert for maximum structural strength.

Note: For installation and tooling information, see pages 68 and 69.

606 Flared Series - continued

Body and Sleeve Dash Number Selection

Sleeve Dash Number

Round *down* to the nearest hundredth of an inch of the panel core thickness (See Fig. 1).

Example: .489 Core Thickness, drop last digit to read -48.

Note: For inspection, the actual Sleeve length will be .010-.015 shorter than the converted dash number.

Example: -48 = .480; actual length = .465-.470.


Body Dash Number

Select Body Number from Table 2 according to Overall Panel Thickness.

Example: Overall Panel Thickness of .524 = F52 Body Number.

= Thru-Hole Thread
 = Minimum Full Thread Length
 = Not Available

Fig. 1

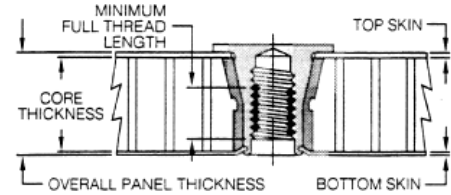

Notes:

1. Flush Head styles are not recommended for panel skin thicknesses greater than .030.
2. Non-Flush Head styles are to be used only with minimum panel skin thickness of .030.

Table 2

Body Dash No.	Panel Thickness	(Thread Size (See Table 1))				
		1	2	3	4	5
F31	.310-.319		-	-	-	-
F32	.320-.329		-	-	-	-
F33	.330-.339		-	-	-	-
F34	.340-.349			-	-	-
F35	.350-.359			-	-	-
F36	.360-.369				-	-
F37	.370-.379				-	-
F38	.380-.389				-	-
F39	.390-.399	.138			-	-
F40	.400-.409	↑			-	-
F41	.410-.419				-	-
F42	.420-.429				-	-
F43	.430-.439					-
F44	.440-.449		.164			-
F45	.450-.459	↓	↑	.190		-
F46	.460-.469	.138	↑	↑		-
F47	.470-.479	.207				-
F48	.480-.489	↑				-
F49	.490-.499	↑	↓			
F50	.500-.509		.164			
F51	.510-.519		.246			
F52	.520-.529	↓	↑			
F53	.530-.539	.207	↑			
F54	.540-.549	.276	↓			
F55	.550-.559	↑		.190		
F56	.560-.569			.285	.250	
F57	.570-.579	↑	↓	↑	↑	
F58	.580-.589		.246	↑	↑	
F59	.590-.599		.328			
F60	.600-.609		↑			
F61	.610-.619					
F62	.620-.629					
F63	.630-.639					
F64	.640-.649			↓		
F65	.650-.659			.285		
F66	.660-.669	↓	↓	.380	↓	.312
F67	.670-.679	.276	.328	.380	.250	.312

Body Dash No.	Panel Thickness	(Thread Size (See Table 1))				
		1	2	3	4	5
F68	.680-.689	.276	.328	.380	.375	.312
F69	.690-.699	↑	↑	↑	↑	↑
F70	.700-.709					
F71	.710-.719					
F72	.720-.729					
F73	.730-.739					
F74	.740-.749					
F75	.750-.759					
F76	.760-.769					
F77	.770-.779					
F78	.780-.789					
F79	.790-.799				↓	
F80	.800-.809				.375	↓
F81	.810-.819				.500	.312
F82	.820-.829				↑	.469
F83	.830-.839					↑
F84	.840-.849					
F85	.850-.859					
F86	.860-.869					
F87	.870-.879					
F88	.880-.889					
F89	.890-.899					
F90	.900-.909					
F91	.910-.919					
F92	.920-.929					
F93	.930-.939					
F94	.940-.949					
F95	.950-.959					
F96	.960-.969					
F97	.970-.979					.469
F98	.980-.989					.625
F99	.990-.999					↑
F100	1.000-1.009					
F101	1.010-1.019					
F102	1.020-1.029					
F103	1.030-1.039					
F104	1.040-1.049	.276	.328	.380	.500	.625

Installation and Tooling Selection

600 Series, Flared Structural Type

The characteristic design of this series will retain the fastener in the panel until time of assembly. Knurls under the head of the body of these internally threaded fasteners, grip the cover sheet and act as an anti-rotation feature.

Panel Preparation


Requires the following:

1. A two diameter hole through the panel.
2. A drill-counterbore combination or singly, or a step drill to standard diameters. See table below.
3. Access to both sides of the panel.
4. Residual core and bondline material must be removed to allow the sleeve to seat on the bottom skin.


Installation Drill Diameters

Fastener Size	0	1	2	3	4	5	6
"A" Pilot Drill Fig. 1, +.005/-.000	.152	.177	.228	.228	.295	.358	.421
"B" C'bore Fig. 2, +.010/-.000	.250	.312	.375	.375	.500	.562	.625

Skin Thickness to .032:

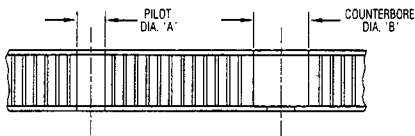

Skin Thickness Greater Than .032



Panel cover sheets up to .032" will dimple automatically to obtain a flush head condition. Thicker sheets may either require the use of the non-flush head style fastener, or if flushness is required, pre-dimpling or spotfacing is common practice in the industry.


Fastener Installation

The most commonly used method, and that which is recommended, is the use of ram type equipment, such as an arbor press or hydraulic press.


1. Position fastener in prepared hole.
2. Select tools from Installation Tool Chart (Opposite).
3. Position panel over alignment tool with the guide anvil projecting through the pilot hole. See figure 3.
4. Position fastener in prepared hole and apply pressure with the pressing anvil until the fastener head becomes flush with the top skin. See figure 4.
5. Replace alignment tool with flaring anvil and again apply pressure with pressing anvil until flaring anvil becomes flush with the bottom skin. See figure 5.
6. Release pressure and fastener is now completely installed. Since the head diameter of the fastener has the greatest area of contact, it may cause a slight spring back condition. However, when the component is bolted to the panel, the fastener will again become flush.

One time setting of insert is critical to a good installation. Do not 'bump' to set flush. Spring back is inherent in the panel and multiple resets of the insert results in a loose body. If within .015 or flush pull the head to flush by attaching the component part.





Installation Sequence

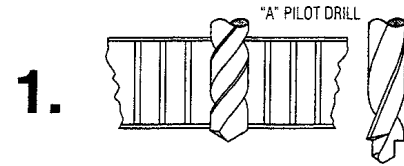

Thru-hole is drilled in panel. Step or piloted counterbore drills can speed this process.

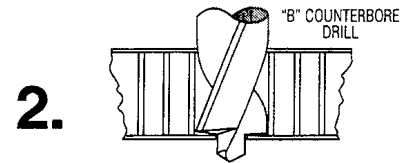

Counterbore is drilled through top skin to inside surface of bottom. Remove core and bond line residual.

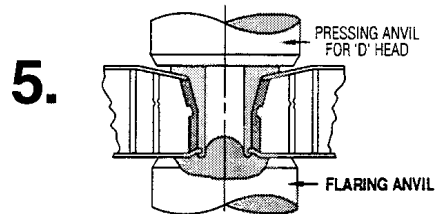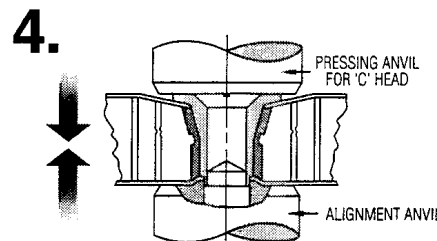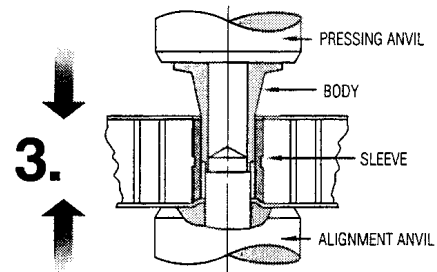


Tooling Part Numbers

Example: Insert Part Number 603D3-47F50 requires Tool Kit Part Number: 1632K3


Fastener Series	Tool Kit Number	Consisting of:			
		Alignment Anvil	Pressing Anvil Countersink	Pressing Anvil Flat	Flaring Anvil
601(*)0	1632K0	1632-001	1632-002	1632-003	1632-004
602(*)0					
603(*)0					
604(*)0					
601(*)1	1632K1	1632-11	1632-12	1632-13	1632-14
602(*)1					
603(*)1					
604(*)1					
601(*)2	1632K2	1632-21	1632-22	1632-23	1632-24
602(*)2					
603(*)2					
604(*)2					
606(*)1					
601(*)3	1632K3	1632-21	1632-32	1632-23	1632-24
602(*)3					
603(*)3					
604(*)3					
601(*)4	1632K4	1632-41	1632-42	1632-43	1632-44
602(*)4					
603(*)4					
604(*)4					
606(*)2					
606(*)3					
601(*)5	1632K5	1632-51	1632-52	1632-53	1632-54
602(*)5					
603(*)5					
604(*)5					
606(*)4					
601(*)6	1632K6	1632-61	1632-62	1632-63	1632-64
602(*)6					
603(*)6					
604(*)6					
606(*)5					

(*) Fill in 'C', 'D' or 'F' as applicable.


Pressing Anvils For 'D' and 'F' Style Heads




Pressing Anvils For 'C' Style Heads



Alignment Anvil



Flaring Anvil



Delron Inserts

A106 Series - Thru-Bolt/Thru-Rivet

A106 Series inserts are designed specifically for lightweight Thru-Hole applications where core crush to the panel is very critical and should be minimized. Recommended in graphite skin applications.

Style Selection

Any sleeve style may be used in combination with any Plug style of the same size.

Head Style	C - Flush, Countersink	D - Flush, Thru-Hole	FC - Non-Flush, Countersink Hole	F - Non-Flush, Thru-Hole
Plug				
Head Style	D - Flush, -1 Length	D - Flush, -0 Length	F - Non-Flush, -1 Length	F - Non-Flush, -0 Length
Sleeve				

Note: "B" Diameter may be omitted on short lengths.

Table 1

Size	A Dia.	B Dia. (Ref)	C Dia. Thru (Bolt)	D Dia. Thru (Rivet)	E Dia. C'Sink (Bolt)	F Dia. C'Sink (Rivet)	Installation Hole Diameter +.005-.000
1	.50	.27	.141/.147	.133/.139	.274	.233	.375
2	.50	.27	.166/.172		.332	.293	.375
3	.62	.29	.190/.196		.382	.365	.406
4	.75	.35	.254/.260		.505	.483	.500
5	.81	.41	.315/.321		.633	.574	.640

Note:


Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Table 2

Size	Sleeve Dash Number	
	-0	-1
1	.180 thru .249	.250 and Up
2		
3		
4	.180 thru .309	.310 and Up
5	.200 thru .369	.370 and Up

= Panel Thickness

Typical Assembly

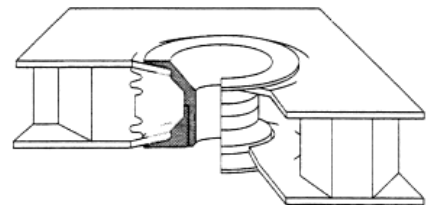

Typical Series A106 Thru-Hole Plug and Sleeve assembly, installed in honeycomb sandwich panel.

Note: For installation and tooling information, contact the Rosán Engineering Department.

See Sheet 2 for Part Number Selection


A106 Series - continued

Part Number Selection


Two part numbers—Sleeve and Plug—are required for a complete assembly. Consult Rosán for availability of optional materials, finishes, sizes and length.

Examples:

Plug:

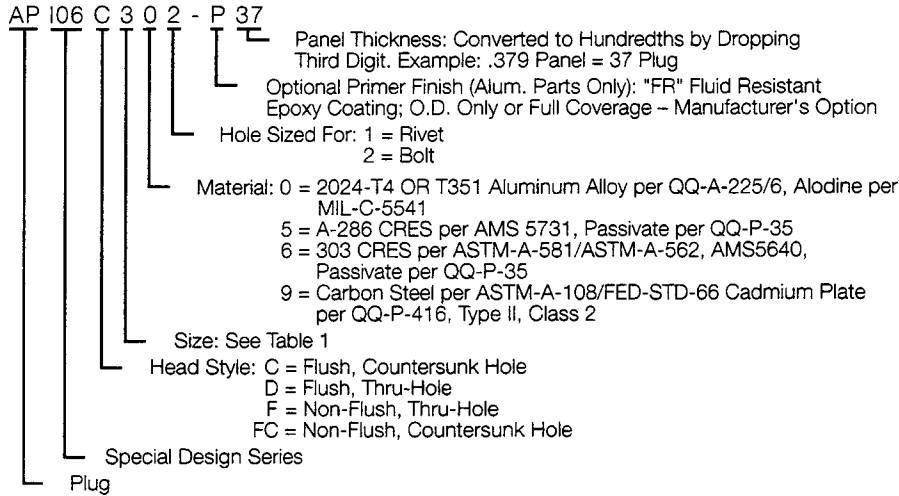



Sleeve:

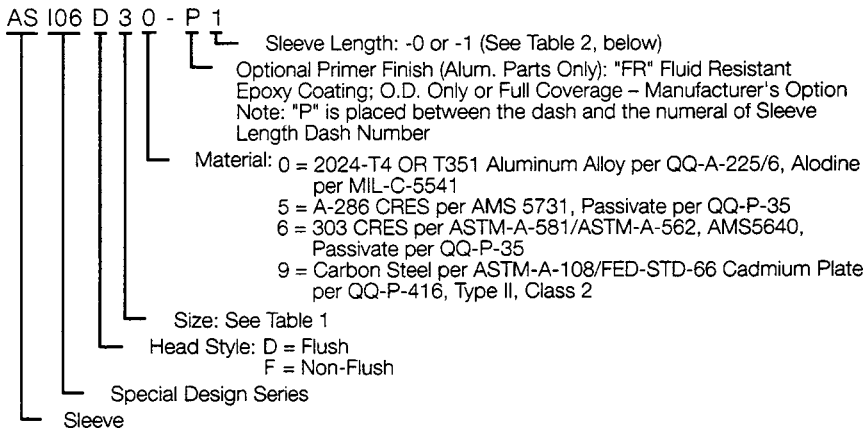

Delron Inserts

D147HF Series - Floating Nut with Self-Locking, Blind Thread

D147HF Series inserts are designed for applications where potential hole misalignment requires a floating nut element. This series features an extensive variety of material and finish combinations.

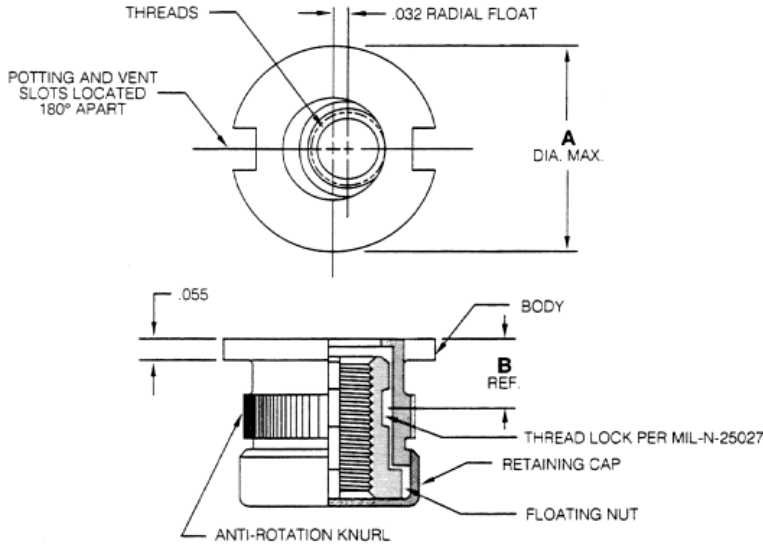

Adhesive backed installation tabs are supplied with each Insert. See codes listed in Table 1.

Notes:

1. Burrs caused by slotting are permissible under flange.
2. Tolerances, unless otherwise specified: $.xxx \pm .010$; Angles $\pm 2^\circ$.


Table 1

Size	Thread Per MIL-S-8879	A Head Dia.	Installation Tab	Installation Hole Dia.	B Ref.
04	.1120-40 UNJC-3B	.561	T7	.562-.565	.14
06	.1380-32 UNJC-3B	.561	T7	.562-.565	.14
08	.1640-32 UNJC-3B	.561	T7	.562-.565	.16
3	.1900-32 UNJF-3B	.561	T7	.562-.565	.16
4	.2500-28 UNJF-3B	.686	T9	.687-.690	.18
5	.3125-24 UNJF-3B	.811	T11	.812-.815	.20
6	.3750-24 UNJF-3B	.937	T27	.938-.941	.22


Part Number Selection

Consult Rosán for availability of optional materials, finishes and sizes.

Example:

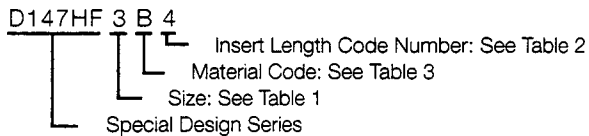

Typical Assembly

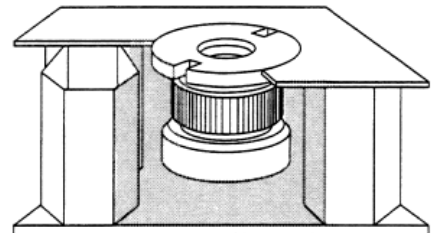

Typical Series D147HF, Floating Nut Insert; installed in honeycomb panel. Insert is held in place by a cured epoxy compound.

Note: For general installation information, refer to page 45. For hole preparation see table above.

D147HF Series - continued

Length Dash Number Selection

Select Length Code Number from Table 2 based on the minimum full thread length required by the application. Insert length "L" must be a minimum of .040" less than depth of panel core (See Fig. 1).

Example: Requirements: .2500-28 Size Thread, Carbon Steel Nut and Body, with a Minimum Full Thread Length of .495.

From table select:

7 P/N = D147HF4B7.

Table 2

Length Code No.	L	Thread Size					
		06	08	3	4	5	6
2	.350	.276	.276	.276	.276	.276	.276
3	.375	.276	.301	.301	.301	.301	.301
4	.455	.276	.328	.380	.386	.386	.386
5	.565	.276	.328	.380	.491	.491	.491
6	.690	.276	.328	.380	.500	.616	.616
7	.815	.276	.328	.380	.500	.625	.742
8	.935	.276	.328	.380	.500	.625	.750
9	1.060	.276	.328	.380	.500	.625	.750
10	1.185	.276	.328	.380	.500	.625	.750


- Notes:** 1. Maximum bolt engagement should not exceed "Length" minus .060.
2. Minimum full thread shall be 2 diameters where length permits.

Table 3 - Material and Finish Selection

Material Code	Floating Nut	Body
A	Carbon Steel per FED-STD-66 Cadmium Plate per QQ-P-416, TYPE II, CL2	2024-T4 OR T351 Aluminum Alloy QQ-A-225/6 Alodine per MIL-C-5541
B	Carbon Steel per FED-STD-66 Cadmium Plate per QQ-P-416, TYPE II, CL2	Carbon steel per ASTM-A-108/FED-STD-66 Cadmium Plate per QQ-P-416, TYPE II, CL2
C	303 CRES per ASTM-A-581, AMS5640 Passivate per QQ-P-35	303 CRES per ASTM-A-582, AMS5640 Passivate per QQ-P-35
D	303 CRES per ASTM-A-581, AMS5640 Passivate per QQ-P-35	2024-T4 OR T351 Aluminum Alloy QQ-A-225/6 Alodine per MIL-C-5541
E	Carbon Steel per FED-STD-66 Cadmium Plate per QQ-P-416, TYPE II, CL2 Dry Film Lube per MIL-L-46010 TYPE I	2024-T4 OR T351 Aluminum Alloy per QQ-A-225/6 Alodine per MIL-C-5541
F	303 CRES per ASTM-A-581, AMS5640 High Chloride Nickel Strike Cadmium Plate per QQ-P-416, TYPE II, CL2	6061-T6 Aluminum Alloy QQ-A-225/8 Alodine per MIL-C-5541
G	Carbon Steel per FED-STD-66 Cadmium Plate per QQ-P-416, TYPE II, CL2	303 CRES per ASTM-A-582, AMS5640 Passivate per QQ-P-35

Optional Finish for Aluminum Bodies: Anodize per MIL-A-8625, Type I.

Fig. 1

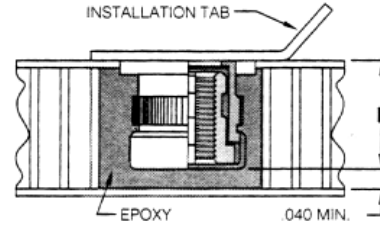


Minimum clearance is required between bottom of insert and inside panel skin for proper epoxy bonding.

 = Minimum Full Thread

Delron Inserts Flush Head with Floating Nut D137HF Series - Thin Panel

D137HF Series inserts are designed specifically for lightweight applications in .300 minimum thick panels. The inserts provide a flush application with a floating nut element for potential hole misalignments.

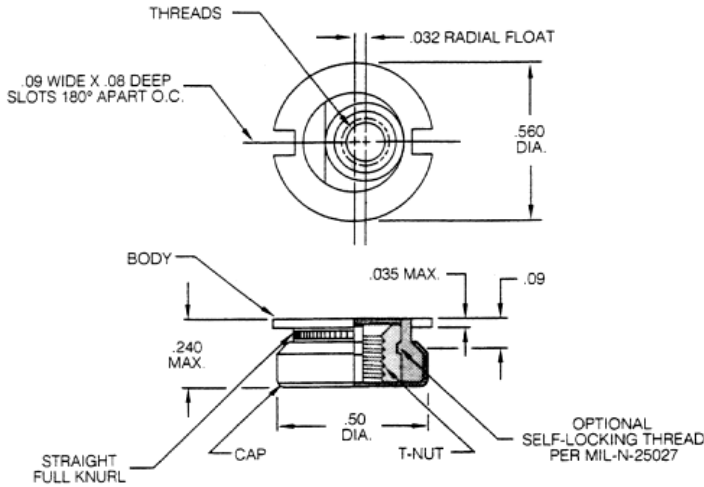

Materials and Finishes:

Body: Options listed in Part Number Selection.

Cap: Brass; Cadmium plated, or Aluminum, Anodized at manufacturer's option.

T-Nut: Options listed in Part Number Selection.

Notes:

1. No. T-7 adhesive backed installation tabs are furnished with all parts.
2. Tolerances, unless otherwise specified: .xxx ± .010; Angles ± 2°.

Table 1

Size	Thread Size Per MIL-S-8879	Installation Hole Dia.
1	.1380-32 UNJC-3B	.560 - .567
2	.1649-32 UNJC-3B	
3	.1900-32 UNJF-3	

Part Number Selection

Consult Rosán for availability of optional materials, finishes and sizes.

Example:

D137HF 3 6 5 C M

T-Nut Optional Finish: M = Dry Film Lubricant per MIL-L-46010, Type I

Body Material:

() = 2024-T4 or T351 Aluminum Alloy per QQ-A-225/6, Anodize per MIL-A-8625

C = 303 CRES Steel per ASTM-A-581, ASTM-A-582, AMS5640 Passivate per QQ-P-35

S = Carbon Steel per ASTM-A-108/FED-STD-66, Cadmium Plate per QQ-P-416, Type II, Class 2


Thread Type: 3 = Threaded Only (Non-Locking)
5 = Self-Locking Thread

Nut Material: 6 = 303 CRES, Passivated
9 = Carbon Steel, Cadmium Plated

Size: See Table 1

Special Design Series

Typical Assembly

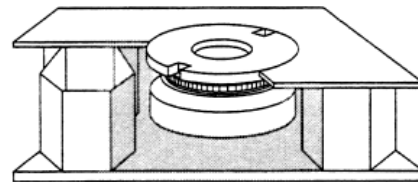


Typical Series D137HF, Floating Nut Insert; installed in honeycomb sandwich panel. Insert is held in place by a cured epoxy compound.

Note: For general installation information, refer to page 45. For hole preparation see table above.


Optional Tube Packaging for Potted-in Types (400 Series and 1800 Series (NAS) versions)

Molded-in inserts with installation tabs are supplied in convenient tube packaging. Tubes are clear for easy visual identification and inventory inspection.

- Inserts with aluminum installation tabs are packaged in cylindrical tubing.

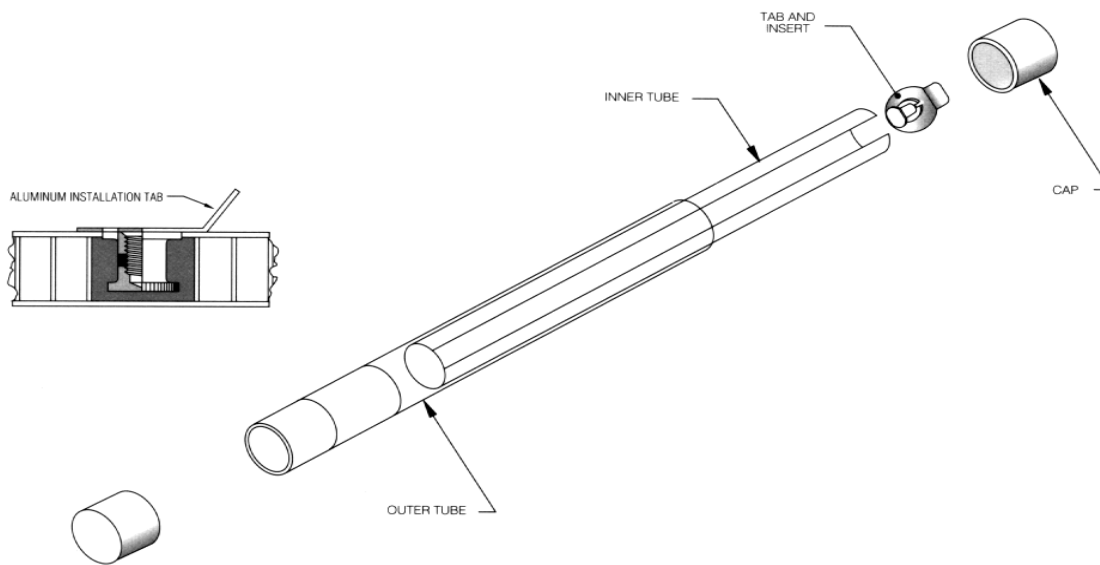

- Inserts with plastic installation tabs are packaged in form, fitting tubing.

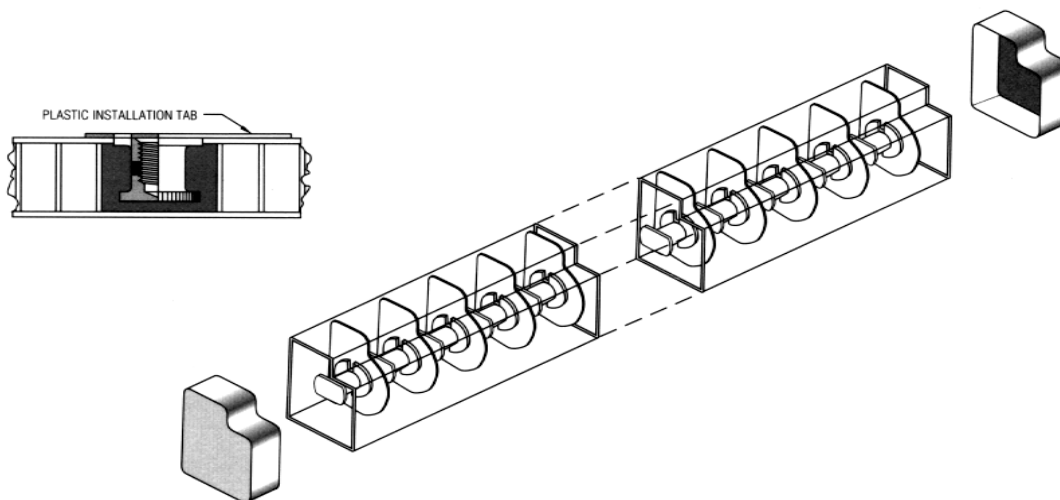

United States Customer Teams

• REGIONAL OFFICES •

Customer Team Washington D.C.

45025 Aviation Drive, Suite 2
Dulles, VA 20166 USA
Tel: 703.742.4450
Fax: 703.742.4451

Customer Team Dallas

701 Highlander Boulevard, Suite 450
Arlington, TX 76015 USA
Tel: 817.417.0677
Fax: 817.417.0678

Customer Team Los Angeles

3016 West Lomita Boulevard
Torrance, CA 90505 USA
Tel: 310.784.0700
Fax: 310.784.6665

Customer Team Seattle

Fisher Business Center, Suite 605
3400 188th Street S.W.
Lynnwood, WA 98037 USA
Tel: 425.712.1599
Fax: 425.744.1283

• DISTRIBUTION OFFICES •

Customer Team-Distribution Dallas

701 Highlander Boulevard, Suite 360
Arlington, TX 76015 USA
Tel: 817.417.4128
Fax: 817.417.4129

Customer Team-Worldwide Distribution Los Angeles

3016 West Lomita Boulevard
Torrance, CA 90505 USA
Tel: 310.784.6400
Fax: 310.784.6608

European Customer Teams

• AEROSPACE OFFICES •

Customer Team Hildesheim

P.F. 10 13 20, Steven 3
D-31113 Hildesheim-Bavenstedt Germany
Tel: 49.5121.762.40
Fax: 49.5121.762.496

Customer Team U.K.

15 New Star Road
Leicester LE4 9JD England
Tel: 44.0116.274.3660
Fax: 44.0116.274.3666

Customer Team Naples

Via San Nullo 171
80014 Giugliano (Na) Italy
Tel: 39.81.804.8852
Fax: 39.81.804.8854

Customer Team Paris

P.A. de la Danne - Eragny
B.P. 14-95611
Cergy-Pontoise Cedex - France
Tel: 33(0)1.34.32.30.30
Fax: 33(0)1.30.37.12.69

Customer Team Toulouse

Victoria Center
20 Chemin de Laporte
31300 Toulouse - France
Tel: 33(0)5.34.50.57.60
Fax: 33(0)5.61.49.04.19

• INDUSTRIAL OFFICES •

Customer Team Saint Cosme

9 Rue des Cressonnieres, BP 5
72110 Saint Cosme en Vairais France
Tel: 33(0)2.43.31.41.00
Fax: 33(0)2.43.31.41.41

Customer Team Kelkheim

Industriestraße 6
D-65779 Kelkheim Germany
Tel: 49.6195.8050
Fax: 49.6195.5647

Customer Team U.K.

15 New Star Road
Leicester LE4 9JD England
Tel: 44.0116.274.3660
Fax: 44.0116.274.3666

Manufacturing Facilities

Industry: Unruh

Screwcorp / Voi-Shan
135 North Unruh Avenue
City of Industry, CA 91744 USA
Tel: 626.937.5400
Fax: 626.937.5454

Santa Ana

Deltron / Rosán
3130 West Harvard Street
Santa Ana, CA 92704 USA
Tel: 714.641.8800
Fax: 714.641.8801

South Bay

Camloc / RAM / Tridair / Voi-Shan
3000 West Lomita Boulevard
Torrance, CA 90505 USA
Tel: 310.784.2600
Fax: 310.784.6606

Kelkheim

Camloc / Tridair
Industriestraße 6
D-65779 Kelkheim Germany
Tel: 49.6195.8050
Fax: 49.6195.5647

Guarda

Eurosim / Simmonds
Parque Industrial da Guarda
Lotes 53/54 6300 Guarda Portugal
Tel: 35.10.712.22007

Fullerton

Kaynar / Eagle
800 S. State College Blvd.
Fullerton, CA 92831 USA
Tel: 714.871.1550
Fax: 714.680.0175

Fullerton: Plant 2

K-Fast / APS
801 S. Placentia Ave.
Fullerton, CA 92831 USA
Tel: 714.738.3600
Fax: 714.278.9900

Placentia

Microdot
190 West Cowther Avenue
Placentia, CA 92670 USA
Tel: 714.870.6650
Fax: 714.524.5346

Stoughton

Marson
44 Campanelli Parkway
Stoughton, MA 02072 USA
Tel: 800.343.3633
Fax: 800.644.2177

Ontario

Mairoll
747 E. Francis Street
Ontario, CA 91761 USA
Tel: 909.947.3366
Fax: 909.947.4866

Saint Cosme

Simmonds
9 Rue des Cressonnieres, BP 5
72110 Saint Cosme en Vairais
France
Tel: 33(0)2.43.31.41.00
Fax: 33(0)2.43.31.41.41

Hildesheim

Mecaero / Rosán / Screwcorp / Voi-Shan
P.F. 10 13 20, Steven 3
D-31113 Hildesheim-Bavenstedt
Germany
Tel: 49.5121.762.40
Fax: 49.5121.511.500

Roques

Mecaero
Boulevard du Grand-Castaing
Roques-eur Garonne
31128 Portet - Sur - Garonne Cedex
France
Tel: 33(0)5.61.51.82.30
Fax: 33(0)5.61.51.60.78

Montbrison

SNEP
BP 84 - 42602
Montbrison Cedex France
Tel: (33) 77.58.17.18
Fax: (33) 77.58.57.72

Oakleigh

Recoil
20 Stamford
Road, Oakleigh Vic. 3166
Australia
Tel: 61.3.9563.1500
Fax: 61.3.9563.1980

Fémipari KFT

8248 Nemesvámos, Hungary
Dózsa György u. 2/a
Tel: 36.06.88.265.801
Fax: 36.06.88.265.802

Industry: Temple

Screwcorp / Voi-Shan
13001 Temple Avenue
City of Industry, CA 91746 USA
Tel: 626.369.3333
Fax: 626.369.3416

Conches

Mecaero
Zone Industrielle - BP 9
27910 Conches, France
Tel: 33.32.30.11.45
Fax: 33.32.30.98.06

Integrated Product Service Solutions

Fairchild Fasteners Direct

20660 Nordhoff Street
Chatsworth, CA 91311 USA
Tel: 818.998.1412
Fax: 818.407.5945

Part of Fairchild Fasteners

Fairchild Fasteners Direct: Germany

Robert-Bosch
Straße 4
D-86551 Aichach Germany
Tel: 49.8251.8757
Fax: 49.8251.513.11


Part of Fairchild Fasteners

Fairchild Fasteners Direct: France

P.A. de la Danne - Eragny
B.P.14 - 95611 Cergy-Pontoise Cedex
France
Tel: 33.1.34.32.55.33
Fax: 33.1.34.32.55.30

Part of Fairchild Fasteners

Fairchild Fasteners



www.fairchildfasteners.com